



**KWC**

KWC Home

Catalog  
2023



## Faucets for the kitchen 7

<b>KWC</b> KIO		8
<b>KWC</b> BEVO E	<b>NEW</b>	11
<b>KWC</b> ERA		14
<b>KWC</b> ZOE TOUCH LIGHT PRO		17
<b>KWC</b> ZOE		20
<b>KWC</b> ONO TOUCH LIGHT PRO		29
<b>KWC</b> ONO		36
<b>KWC</b> INOX		44
<b>KWC</b> EVE		48
<b>KWC</b> SIN		54
<b>KWC</b> DOMO E		57
<b>KWC</b> DOMO   6.0	<b>NOVELTIES</b>	59
<b>KWC</b> LIVELLO		66
<b>KWC</b> AVA 2.0	<b>NEW</b>	69
<b>KWC</b> WAMAS 2.0	<b>NEW</b>	76
<b>KWC</b> SUNO		77
<b>KWC</b> LUNA E		82
<b>KWC</b> ISLA		89
<b>KWC</b> VITA PRO		90
Soap dispensers	<b>NOVELTIES</b>	92
Accessoires		96

## Faucets commercial kitchen 99

<b>KWC</b> GASTRO		100
-------------------	--	-----

## Faucets for the bath 129

<b>KWC</b> FIT		130
<b>KWC</b> MANA	<b>NEW</b>	134
<b>KWC</b> ORA	<b>NEW</b>	140
<b>KWC</b> AVA E		145
<b>KWC</b> AVA 2.0	<b>NOVELTIES</b>	150
<b>KWC</b> WAMAS 2.0	<b>NEW</b>	162
<b>KWC</b> ZOE		169
<b>KWC</b> ONO TOUCH LIGHT PRO		175
<b>KWC</b> ONO		186
<b>KWC</b> DOMO   6.0		193
<b>KWC</b> BEVO	<b>NOVELTIES</b>	203
<b>KWC</b> ELLA		224
<b>KWC</b> MONTA		233
<b>KWC</b> ACTIVO		238

<b>KWC</b> VITA		242
<b>KWC</b> VITA PRO		246
<b>KWC</b> PILLAR TAP		252
<b>KWC</b> BLUEBOX®		253
Accessoires	<b>NOVELTIES</b>	256

## ShowerCulture 261

Thermostatic mixers	<b>NOVELTIES</b>	262
Lever mixer		271
Bath spouts	<b>NOVELTIES</b>	273
Shower systems		275
Shower heads	<b>NOVELTIES</b>	280
Shower arms	<b>NOVELTIES</b>	282
Hand showers	<b>NOVELTIES</b>	285
Shower brackets	<b>NOVELTIES</b>	289
Sliding wall bars		291
Sliding wall bar kits		293
Hose connections	<b>NOVELTIES</b>	294
Shower hoses		296
Trim kits		298
Shut-off valve		299


## Automatic faucets 303

<b>KWC</b> IQUA		304
-----------------	--	-----

## Tools/Spare parts 309

Tools		310
Spare parts		314
Index		318
Important informations		321
General conditions of sale and delivery		324


# Hygiene



## LEDShine

Visible precision and a bright, friendly workspace:

LEDShine does more than just contribute to a special working atmosphere – this innovative feature makes it easier to see the tiniest specks of dirt and makes it possible to use the faucet without turning on a light.




## SprayClean

Actively helps with the removal of limescale: With a special faceplate and fastening mechanism, SprayClean prevents limescale buildup. Any deposits are sprayed away automatically when the water is running. The special fastening mechanism helps with more stubborn lime deposits: simply turn, clean, and the job is done.



## HealthProtect

Better hygiene and unchanged water quality: HealthProtect highlights the strict standards we set ourselves to ensure that our faucets do not affect the taste and smell of your water – that is why we use high-quality materials (metals, plastics) that are ideally suited for contact with water.



## TripleClean


Three water streams for more flexibility: TripleClean allows you to change between a normal stream for filling glasses, a soft spray for gently cleaning food, and a power spray for prerinsing and removing dirt from dishes.

# Sustainability



## EcoProtect

For economical water consumption and responsible use of resources: EcoProtect represents our commitment to promoting a sustainable lifestyle.




## CoolFix

Intelligent and efficient resource usage: With CoolFix, when the lever is in the center – the most common position – the water runs cold. Only when the lever is turned to the left, the water runs warm.



## GlacierFinish

Robust surfaces and high-quality craftsmanship: GlacierFinish is equipped with durable surfaces that are exceptionally robust and feature an attractive polished shine that you can enjoy for years to come.



## PrecisionMove

Exceptional elegance and precision: PrecisionMove allows for seamless movements and exceptional convenience thanks to our consistent use of top-quality materials and superior craftsmanship.



## QualityControl


Exceptional elegance and precision: PrecisionMove allows for seamless movements and exceptional convenience thanks to our consistent use of top-quality materials and superior craftsmanship.

# Safety



## TouchProtect

Safe to use: An insulated hot water guidance system with a “double skin” principle means the body of the faucet or the pull-out spray can become warm but never hot. In this way, TouchProtect intelligently prevents scalding.




## SkinProtect

Effective protection against scalding: With SkinProtect, your faucet will only supply you with water hotter than 38 °C when you press the safety button on the temperature controller. If the cold water is shut off, the faucet automatically shuts off the hot water immediately.



## SwivelStop

Stop the faucet from moving too far and prevent water damage: SwivelStop allows the swivel range to be adjusted from 360° to 120° or 150° in just a few steps, ensuring that the water only flows into the sink.



## QuickConnect

Stop the faucet from moving too far and prevent water damage: SwivelStop allows the swivel range to be adjusted from 360° to 120° or 150° in just a few steps, ensuring that the water only flows into the sink.



## CertificationGuarantee

Trust is good, certifications are better: our KWC CertificationGuarantee ensures that we have all of our products professionally inspected and certified across all markets.



## SprayLock


Adjust the flow: With SprayLock, you can keep the jet of water from your faucet flowing exactly how you want, even when the water is shut off. When you turn the water back on, the water flows in the same way again.

# Enthusiasm




## DesignSpray

Elegant design and functionality: With DesignSpray, the pull-out spray is seamlessly integrated and recessed. It can be easily extended with just one finger.




## UniqueLever

Innovative lever designs that allow for natural and intuitive use: UniqueLever features innovative KWC design – elegance and precision that you can not only see, but also feel every day.

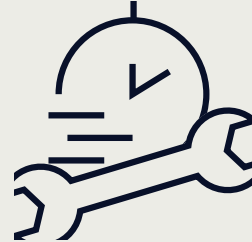


## QuickInstallation

Hassle-free positioning and fastening of the threaded connection for quick and easy installation: the locking nut is screwed into place by hand to hold the faucet in position using QuickInstallation, before it is fixed in place via the two locking screws.



## IntelligentControl

Intuitive control meets modern convenience: IntelligentControl reacts to a tap of your finger, can be programmed based on your personal habits and requirements, and has a light ring that indicates the current water temperature.




## PowerClean

The spray you want at the touch of a button: PowerClean makes it exceedingly easy to switch the flow of water on the spray head – from a standard spray to a fine needle spray.



## TwistProtect

Effortless work around the sink: TwistProtect prevents the hose from twisting or knotting.




## OptimalSpace

Practical yet elegant ergonomic design: OptimalSpace features long, tall spouts that provide ample space for washing and or working.



## EasyLock

A spray that is easy to use and automatically snaps into place: EasyLock is equipped with special positioning pins that ensure that the pull-out spray is always in the right position.



## HighFlex


Increased freedom of movement and ease of use: HighFlex makes it possible to move the spring hose in every direction while ensuring it remains reliably stable when not in use.





# Faucets for the kitchen

<b>KWC</b> KIO		8
<b>KWC</b> BEVO E	<b>NEW</b>	11
<b>KWC</b> ERA		14
<b>KWC</b> ZOE TOUCH LIGHT PRO		17
<b>KWC</b> ZOE		20
<b>KWC</b> ONO TOUCH LIGHT PRO		29
<b>KWC</b> ONO		36
<b>KWC</b> INOX		44
<b>KWC</b> EVE		48
<b>KWC</b> SIN		54
<b>KWC</b> DOMO E		57
<b>KWC</b> DOMO   6.0	<b>NOVELTIES</b>	59
<b>KWC</b> LIVELLO		66
<b>KWC</b> AVA 2.0	<b>NEW</b>	69
<b>KWC</b> WAMAS 2.0	<b>NEW</b>	76
<b>KWC</b> SUNO		77
<b>KWC</b> LUNA E		82
<b>KWC</b> ISLA		89
<b>KWC</b> VITA PRO		90
Soap dispensers	<b>NOVELTIES</b>	92
Accessoires		96

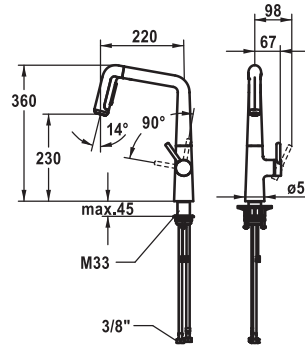

Art.-No.	KWC-No.	FUN
<b>125202</b>	<b>10.481.002.000FL</b>	115.0634.810
all chrome, A 220, flexible connection hoses		
<b>125203</b>	<b>10.481.002.176FL</b>	115.0634.821
matt black, A 220, flexible connection hoses		
<b>125204</b>	<b>10.481.002.127FL</b>	115.0634.822
decor steel, A 220, flexible connection hoses		

### Lever mixer • Kitchen

Lever mixer


- Lever installation only possible on the right side
  - Child safety: cold water flow in lever position towards the front
- gap between wall and centre of mounting hole min. 26 mm
- TouchProtect - anti-scald protection thanks to the "double skin" principle
- Pull-out spray
  - ergonomic spout alignment, shape and handling
  - SprayClean - easy to clean and actively prevents limescale buildup
  - Neoperl® Perlator® laminar
  - PowerClean - needle spray mode, with automatic diverter reset
  - up to 500 mm pull-out length


- Hose guide, swivelling 150°, can be extended to 360°
- EasyLock - a pull-out spray that easily slides back into place
- OptimalSpace - ample space for washing or working
- KWC cartridge M 35 S
  - with ceramic discs
  - flow rate and temperature continuously variable
- Flexible connection hoses 3/8"
- QuickInstallation - Fastening via threaded connection with locking screws
- Mounting hole size  $\varnothing 35$  mm
- To be ordered separately (optional or if necessary):
  - Swivel range limited to 120°, Z.538.320

Flow rate normal spray 10 l/min (3 bar)

Flow rate needle spray 9 l/min (3 bar)

Acoustic group I

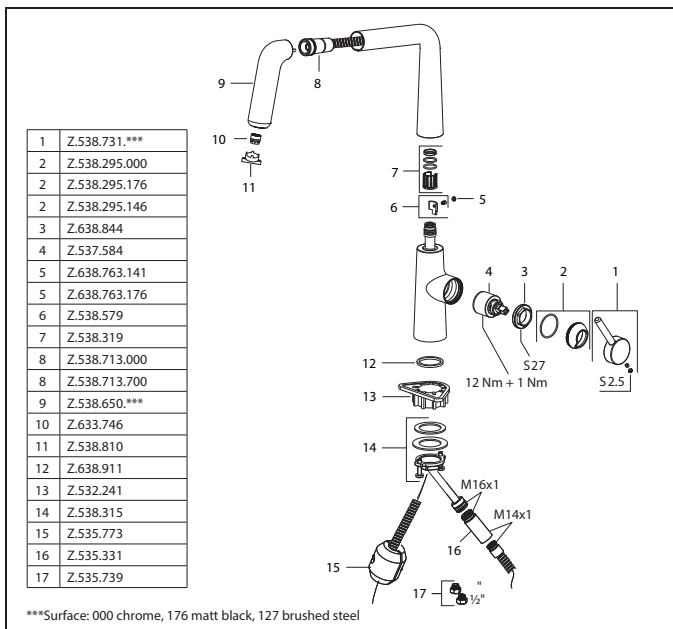

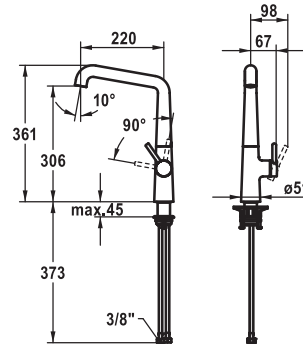

Art.-No.	KWC-No.	FUN
<b>125199</b>	<b>10.481.012.000FL</b>	115.0634.807
all chrome, A 220, flexible connection hoses		
<b>125200</b>	<b>10.481.012.176FL</b>	115.0634.808
matt black, A 220, flexible connection hoses		
<b>125201</b>	<b>10.481.012.127FL</b>	115.0634.809
decor steel, A 220, flexible connection hoses		


**Lever mixer • Kitchen**


Lever mixer

- Lever installation only possible on the right side
  - Child safety: cold water flow in lever position towards the front
- gap between wall and centre of mounting hole min. 26 mm
- Swivel spout 150°, extensible to 360°
  - Neoperl® Caché® laminar
- OptimalSpace - ample space for washing or working
- KWC cartridge M 35 S
  - with ceramic discs
  - flow rate and temperature continuously variable
- Flexible connection hoses 3/8"
- QuickInstallation - Fastening via threaded connection with locking screws
- Mounting hole size ø35 mm
- To be ordered separately (optional or if necessary):
  - Swivel range limited to 120°, Z.538.320

Flow rate 11 l/min (3 bar)

Acoustic group I

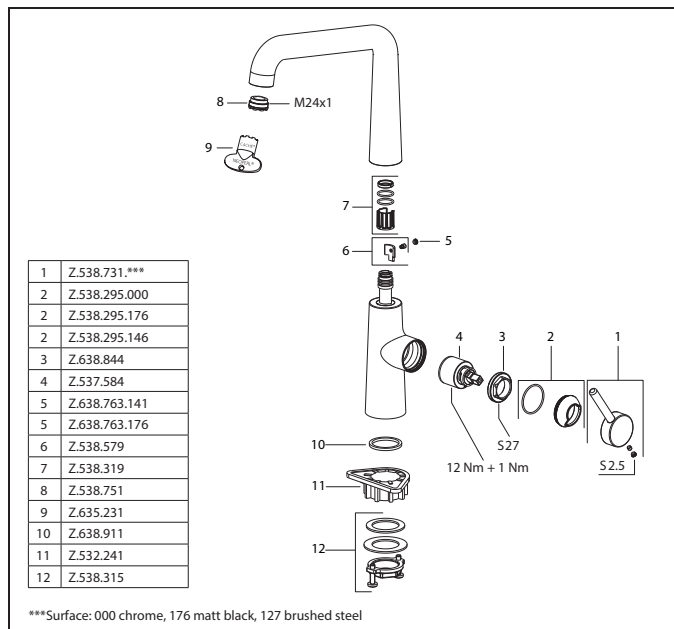

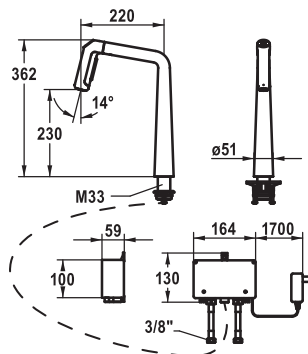

Art.-No.	KWC-No.	FUN
<b>125193</b>	<b>10.481.232.000FL</b>	115.0634.801
all chrome, A 220, flexible connection hoses, mains receiver		
<b>125194</b>	<b>10.481.232.176FL</b>	115.0634.802
matt black, A 220, flexible connection hoses, mains receiver		
<b>125195</b>	<b>10.481.232.127FL</b>	115.0634.803
decor steel, A 220, flexible connection hoses, mains receiver		


**Kitchen • with LED-technology**


IntelligentControl - electronic control

- gap between wall and centre of mounting hole min. 26 mm
- TouchProtect - anti-scald protection thanks to the "double skin" principle
- Microprocessor-control
  - touch'n'flow 1: cold water, 50% flow rate can be individually adjusted and saved
  - touch'n'flow 2: warm water, 50% flow rate can be individually adjusted and saved
  - touch'n'flow 3: hot water, 50% flow rate can be individually adjusted and saved
  - with cleaning programme
- Pull-out spray
  - ergonomic spout alignment, shape and handling
  - SprayClean - easy to clean and actively prevents limescale buildup
  - Neoperl® Perlator® laminar
  - PowerClean - needle spray mode, with automatic diverter reset
  - Integrated control unit
  - up to 500 mm pull-out length
- Hose guide, swivelling 150°, can be extended to 360°
- EasyLock - a pull-out spray that easily slides back into place
- OptimalSpace - ample space for washing or working


- KWC control unit, maintenance-free
  - up-to-date microprocessor and drive technology
  - tried-and-tested valve technology
  - with-out installation materials
  - designed for wired connection to 1 operating unit (standard)
- Flexible connection hoses 3/8"
- QuickInstallation - Fastening via threaded connection with locking screws
- Mounting hole size ø35 mm
- Scope of delivery:
  - Mains receiver 100-240 V / operating voltage 12 V / cable length 2000 mm
- To be ordered separately (optional or if necessary):
  - Swivel range limited to 120°, Z.538.320

Flow rate 10 l/min (3 bar)  
Acoustic group I

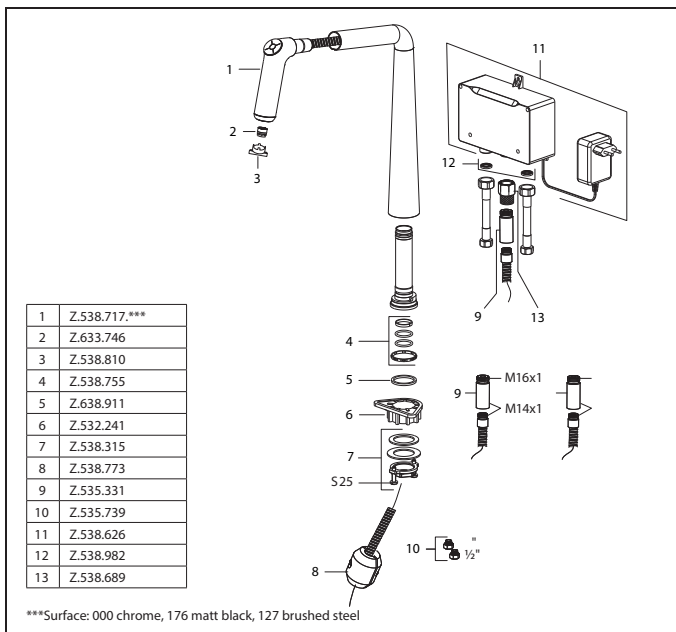

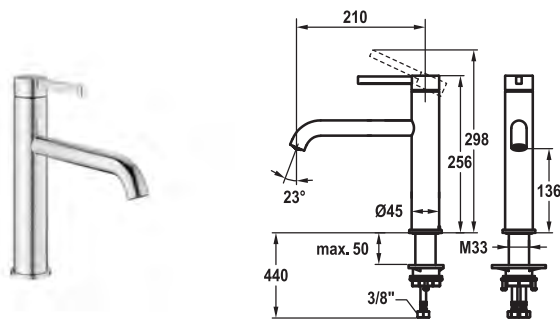

Art.-No.	KWC-No.	FUN
<b>125343</b>	<b>10.531.022.700FL</b>	115.0656.286 stainless steel, A 215, flexible connection hoses
<b>125589</b>	<b>10.531.022.751FL</b>	industrial black, A 215, flexible connection hoses

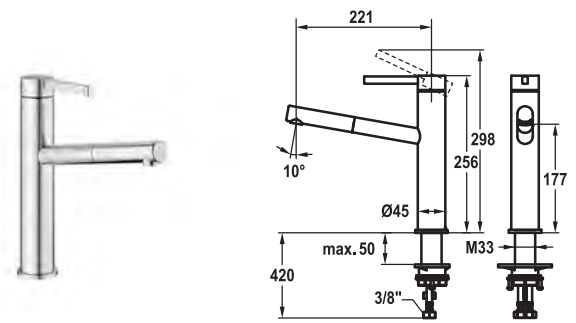

Art.-No.	KWC-No.	FUN
<b>125344</b>	<b>10.531.112.700FL</b>	115.0656.287 stainless steel, A 220, flexible connection hoses
<b>125590</b>	<b>10.531.112.751FL</b>	industrial black, A 220, flexible connection hoses

**Lever mixer • Kitchen**

Lever mixer

- Swivel spout 150°
  - Neoperl® Caché® laminar
- KWC cartridge M 35 S
  - with ceramic discs
  - flow rate and temperature continuously variable
- Flexible connection hoses 3/8"
- QuickInstallation - Fastening via threaded connection with locking screws
- Mounting hole size ø35 mm




**Lever mixer • Kitchen**

Lever mixer


- TouchProtect - anti-scald protection thanks to the "double skin" principle
- Pull-out aerator
  - Neoperl® Caché®
  - up to 700 mm pull-out length
  - QuickConnect - Simple hose connection system
- Hose guide, swivelling 120°
- EasyLock - a pull-out spray that easily slides back into place
- KWC cartridge M 35 S
  - with ceramic discs
  - flow rate and temperature continuously variable
- Flexible connection hoses 3/8"
- QuickInstallation - Fastening via threaded connection with locking screws
- Mounting hole size ø35 mm




Flow rate 12 l/min (3 bar)  
Acoustic group I

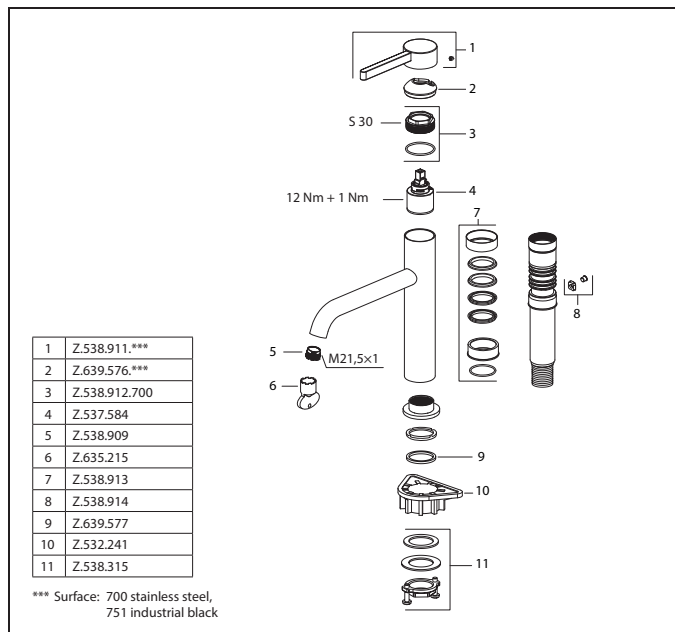

Flow rate 6 l/min (3 bar)  
Acoustic group I

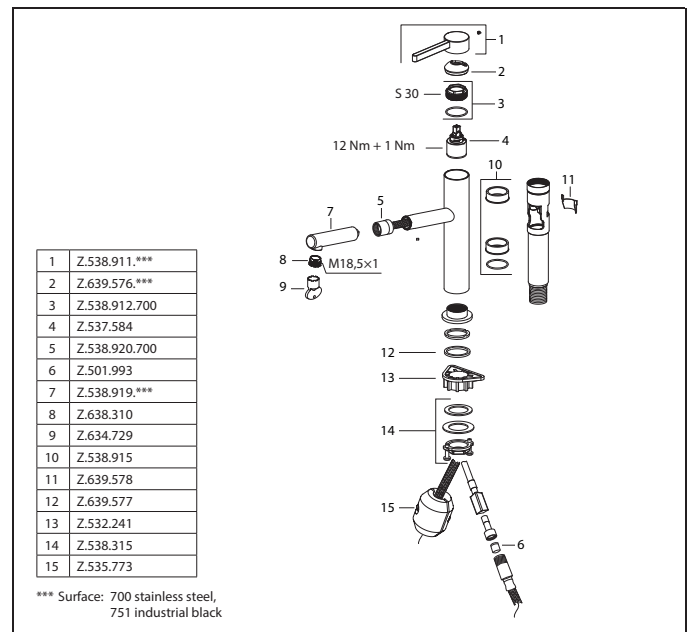

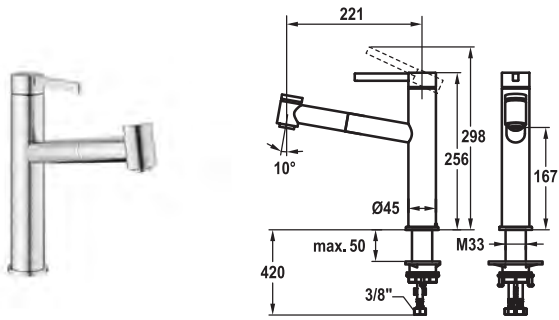

Art.-No.	KWC-No.	FUN
<b>125345</b>	<b>10.531.032.700FL</b>	115.0656.288
stainless steel, A 220, flexible connection hoses		
<b>125591</b>	<b>10.531.032.751FL</b>	
industrial black, A 220, flexible connection hoses		



**Lever mixer • Kitchen**

Lever mixer

- TouchProtect - anti-scald protection thanks to the "double skin" principle
- Pull-out spray
  - SprayClean - easy to clean and actively prevents limescale buildup
  - up to 700 mm pull-out length
  - PowerClean - needle spray mode, with automatic diverter reset
  - QuickConnect - Simple hose connection system
- Hose guide, swivelling 120°
- EasyLock - a pull-out spray that easily slides back into place
- KWC cartridge M 35 S
  - with ceramic discs
  - flow rate and temperature continuously variable
- Flexible connection hoses 3/8"
- QuickInstallation - Fastening via threaded connection with locking screws
- Mounting hole size ø35 mm



Flow rate normal spray 8 l/min (3 bar)  
 Flow rate needle spray 7 l/min (3 bar)  
 Acoustic group I

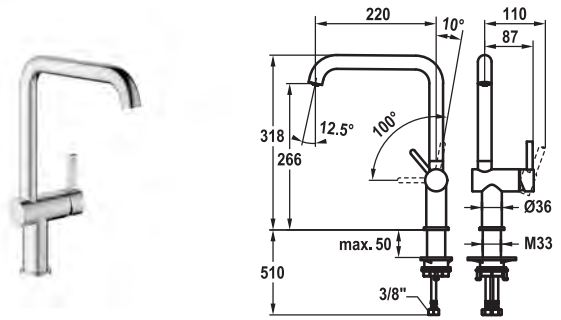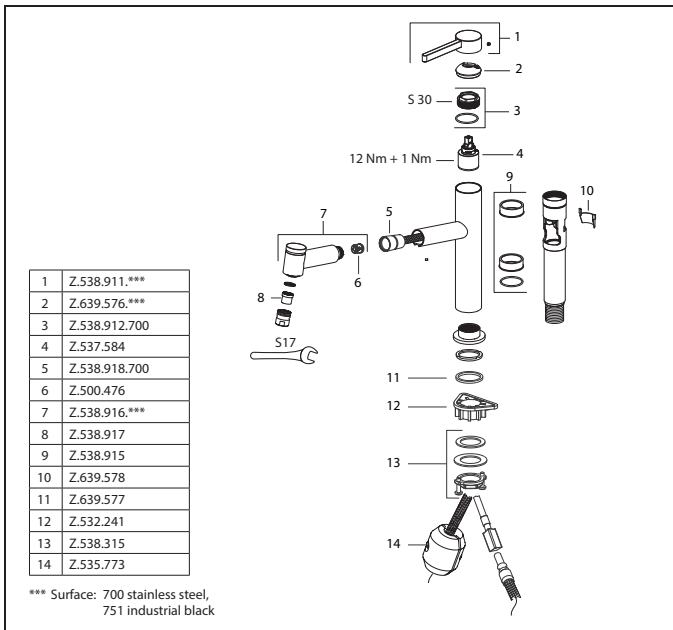

Art.-No.	KWC-No.	FUN
<b>125346</b>	<b>10.531.012.700FL</b>	115.0656.289
stainless steel, A 220, flexible connection hoses		
<b>125347</b>	<b>10.531.012.751FL</b>	115.0656.290
industrial black, A 220, flexible connection hoses		


**Lever mixer • Kitchen**


Lever mixer

- Lever installation only possible on the right side
  - Child safety: cold water flow in lever position towards the front
- TouchProtect - anti-scald protection thanks to the "double skin" principle
- Swivel spout 150°
  - Neoperl® Caché® laminar
- OptimalSpace - ample space for washing or working
- KWC cartridge S 25
  - with ceramic discs
  - flow rate and temperature continuously variable
- Flexible connection hoses 3/8"
- QuickInstallation - Fastening via threaded connection with locking screws
- Mounting hole size ø35 mm




Flow rate 8 l/min (3 bar)  
 Acoustic group I

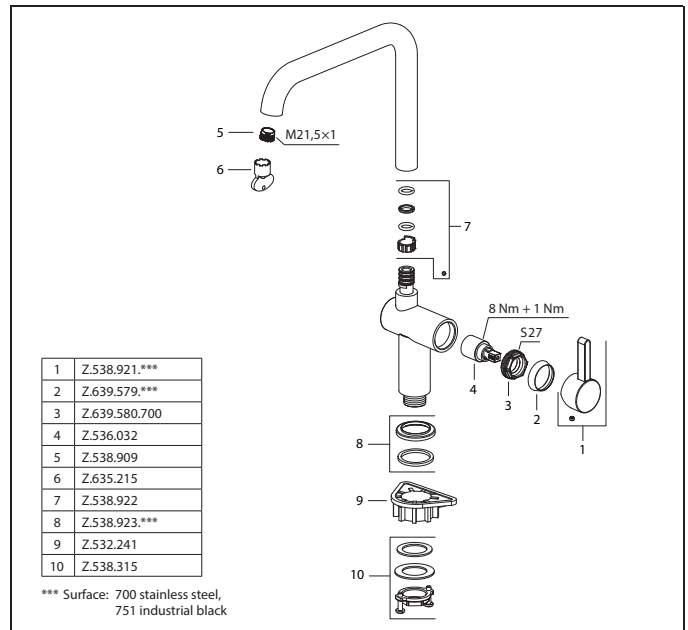

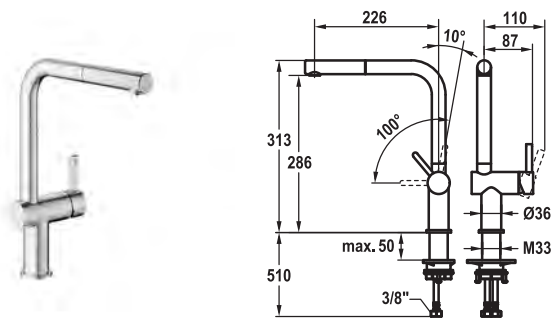

Art.-No.	KWC-No.	FUN
<b>125350</b>	<b>10.531.103.700FL</b>	115.0656.293
stainless steel, A 225, flexible connection hoses		
<b>125351</b>	<b>10.531.103.751FL</b>	115.0656.294
industrial black, A 225, flexible connection hoses		

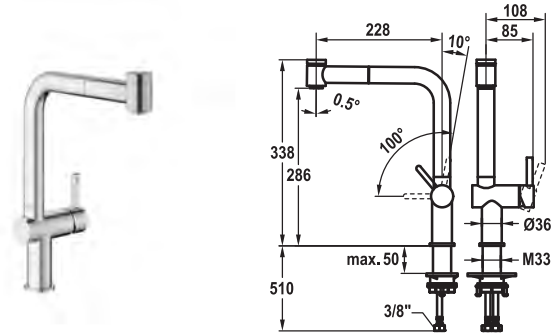

Art.-No.	KWC-No.	FUN
<b>125354</b>	<b>10.531.003.700FL</b>	115.0656.297
stainless steel, A 230, flexible connection hoses		
<b>125355</b>	<b>10.531.003.751FL</b>	115.0656.298
industrial black, A 230, flexible connection hoses		

**Lever mixer • Kitchen**


Lever mixer

- Lever installation only possible on the right side
  - Child safety: cold water flow in lever position towards the front
- TouchProtect - anti-scald protection thanks to the “double skin” principle
- Pull-out aerator
  - Neoperl® Caché®
  - up to 600 mm pull-out length
  - QuickConnect - Simple hose connection system
- Hose guide, swivelling 150°
- EasyLock - a pull-out spray that easily slides back into place
- OptimalSpace - ample space for washing or working
- KWC cartridge S 25
  - with ceramic discs
  - flow rate and temperature continuously variable
- Flexible connection hoses 3/8"
- QuickInstallation - Fastening via threaded connection with locking screws
- Mounting hole size ø35 mm



Coming soon

Flow rate 8 l/min (3 bar)  
Acoustic group I

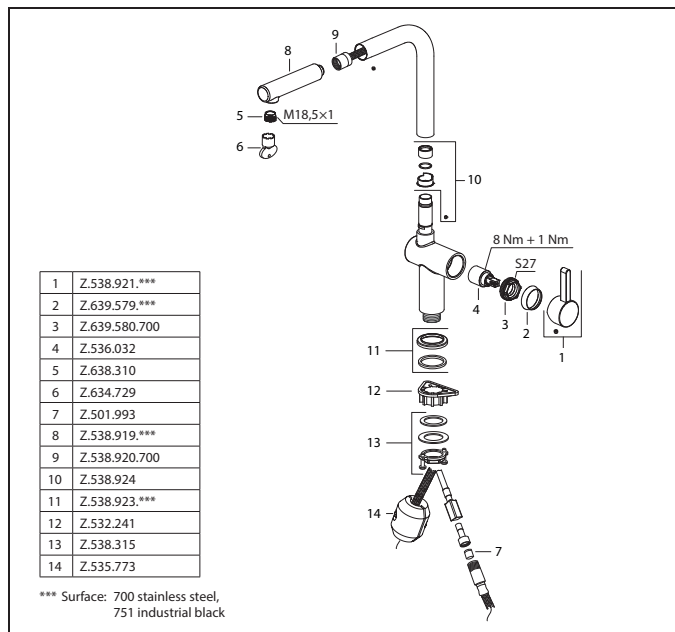

**Lever mixer • Kitchen**


Lever mixer


- Lever installation only possible on the right side
  - Child safety: cold water flow in lever position towards the front
- TouchProtect - anti-scald protection thanks to the “double skin” principle
- Pull-out spray
  - SprayClean - easy to clean and actively prevents limescale buildup
  - up to 600 mm pull-out length
  - PowerClean - needle spray mode, with automatic diverter reset
  - QuickConnect - Simple hose connection system
- Hose guide, swivelling 150°
- EasyLock - a pull-out spray that easily slides back into place
- OptimalSpace - ample space for washing or working
- KWC cartridge S 25
  - with ceramic discs
  - flow rate and temperature continuously variable
- Flexible connection hoses 3/8"
- QuickInstallation - Fastening via threaded connection with locking screws
- Mounting hole size ø35 mm



Coming soon

Flow rate normal spray 8 l/min (3 bar)  
Flow rate needle spray 7 l/min (3 bar)  
Acoustic group I

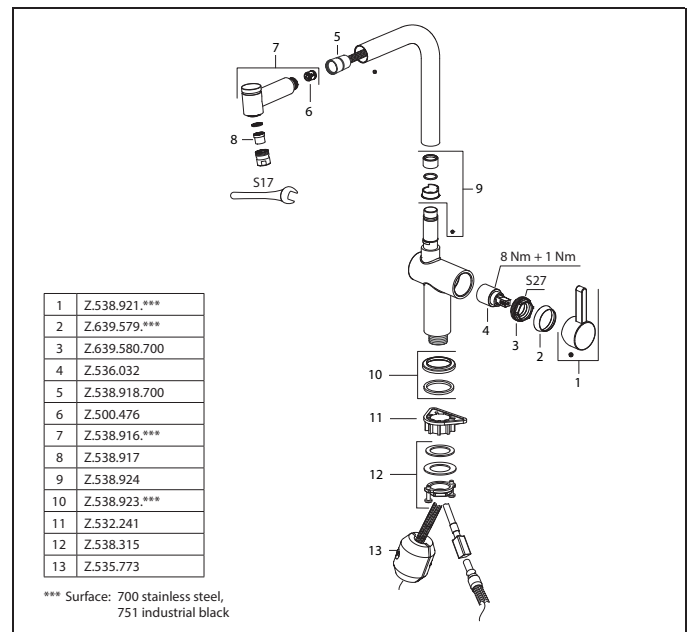

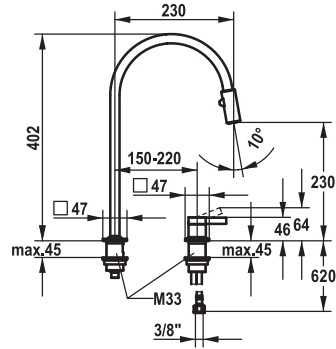

Art.-No.	KWC-No.	FUN
<b>124405</b>	<b>10.392.323.700FL</b>	115.0517.932
stainless steel, A 230, flexible connection hoses		

**Lever mixer • Kitchen**

Lever mixer

- 2-hole
- Lever installation possible on the right or left side
- TouchProtect - anti-scald protection thanks to the "double skin" principle
- Pull-out spray 360° turn - magnetic tight-fit holder
  - SprayClean - easy to clean and actively prevents limescale buildup
  - Jet regulator
  - PowerClean - needle spray mode, with automatic diverter reset
  - up to 500 mm pull-out length
  - black fabric hose


- Hose guide, swivelling 150°, can be extended to 360°
- OptimalSpace - ample space for washing or working
- KWC cartridge S 25
  - with ceramic discs
  - flow rate and temperature continuously variable
- Flexible connection hoses 3/8"
- Fastening by means of threaded sleeve M33 x 1.5
- Mounting hole size ø35 mm

Flow rate normal spray 7 l/min (3 bar)


Flow rate needle spray 7 l/min (3 bar)

Acoustic group I

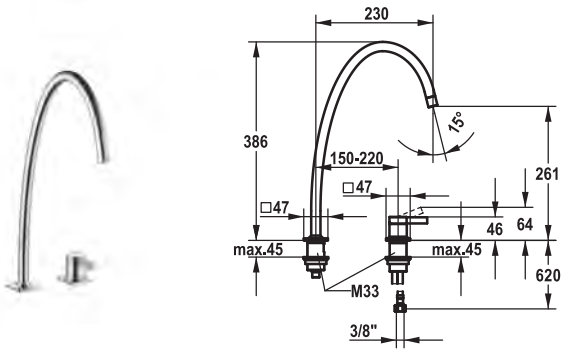

Art.-No.	KWC-No.	FUN
<b>124399</b>	<b>10.392.024.700FL</b>	115.0517.896
stainless steel, A 230, flexible connection hoses		

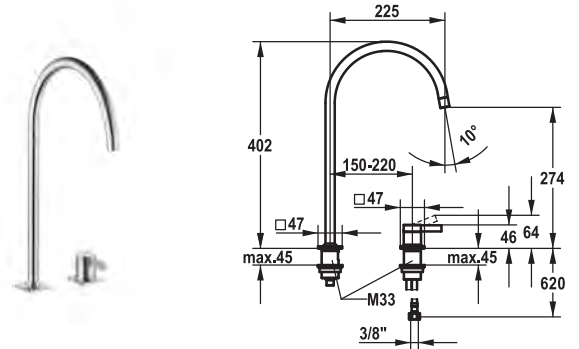

Art.-No.	KWC-No.	FUN
<b>124396</b>	<b>10.392.023.700FL</b>	115.0517.891
stainless steel, A 225, flexible connection hoses		


**Lever mixer • Kitchen**

- Lever mixer
- 2-hole
  - Lever installation possible on the right or left side
  - Swivel spout 150°, extensible to 360°
    - Neoperl® Perlator® laminar
  - OptimalSpace - ample space for washing or working
  - KWC cartridge S 25
    - with ceramic discs
    - flow rate and temperature continuously variable
  - Flexible connection hoses 3/8"
  - Fastening by means of threaded sleeve M33 x 1.5
  - Mounting hole size ø35 mm


**Lever mixer • Kitchen**


- Lever mixer
- 2-hole
  - Lever installation possible on the right or left side
  - Swivel spout 150°, extensible to 360°
    - Neoperl® Perlator® laminar
  - OptimalSpace - ample space for washing or working
  - KWC cartridge S 25
    - with ceramic discs
    - flow rate and temperature continuously variable
  - Flexible connection hoses 3/8"
  - Fastening by means of threaded sleeve M33 x 1.5
  - Mounting hole size ø35 mm

Flow rate 8 l/min (3 bar)  
Acoustic group I

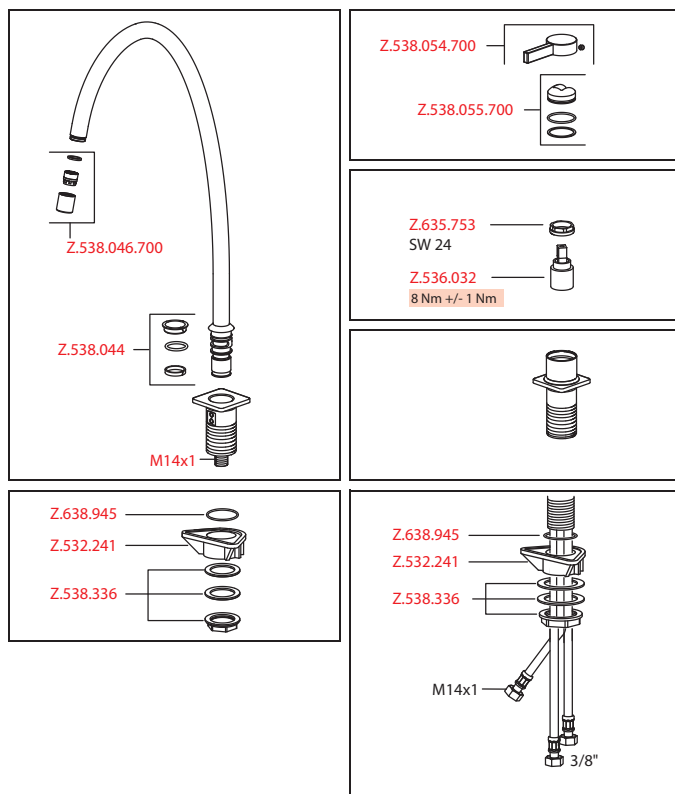

Flow rate 8 l/min (3 bar)  
Acoustic group I

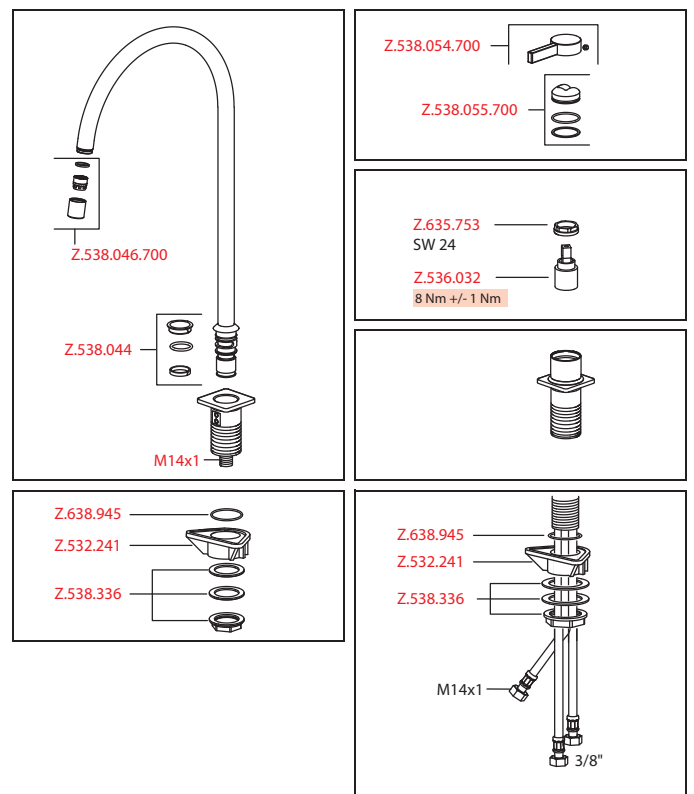

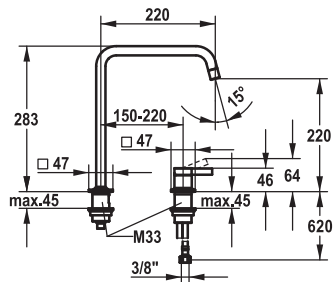



Art.-No.	KWC-No.	FUN
<b>124402</b>	<b>10.392.022.700FL</b>	115.0517.899
stainless steel, A 220, flexible connection hoses		

**Lever mixer • Kitchen**

Lever mixer

- 2-hole
- Lever installation possible on the right or left side
- Swivel spout 150°, extensible to 360°
  - Neoperl® Perlator® laminar
- OptimalSpace - ample space for washing or working
- KWC cartridge S 25
  - with ceramic discs
  - flow rate and temperature continuously variable
- Flexible connection hoses 3/8"
- Fastening by means of threaded sleeve M33 x 1.5
- Mounting hole size ø35 mm

Flow rate 8 l/min (3 bar)  
Acoustic group I

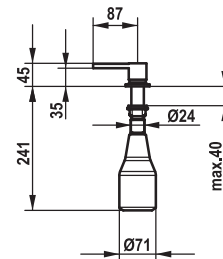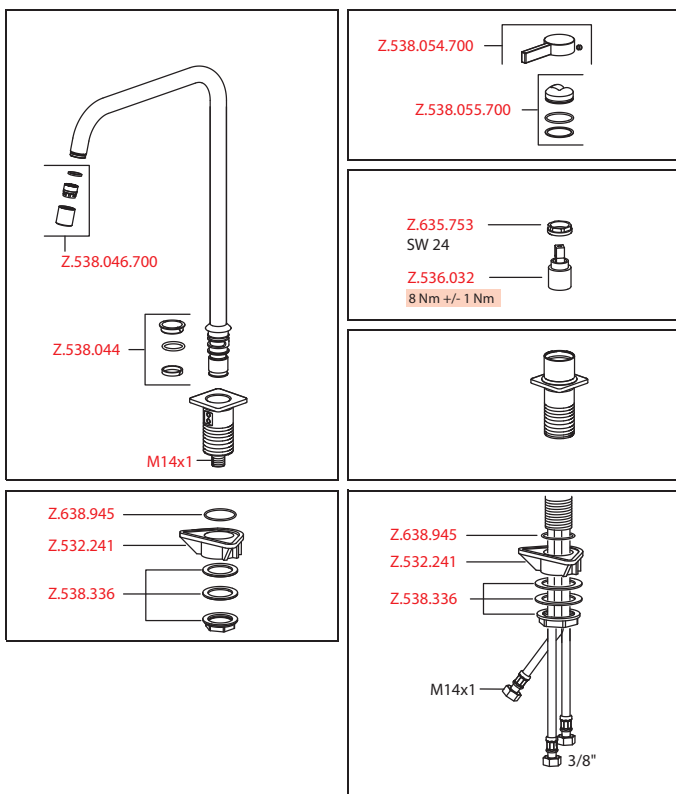


Art.-No.	KWC-No.	FUN
<b>538038</b>	<b>Z.538.038.700</b>	119.0517.935
stainless steel		

**Soap dispensers**

Soap dispenser KWC ERA

- Easily refillable from top without disassembly
- Mounting hole size ø26 mm
- Scope of delivery:
  - Pump
  - Soap container, filling capacity 350 ml Z.538.053

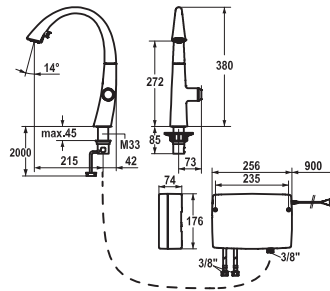

Art.-No.	KWC-No.	FUN
<b>123778</b>	<b>10.201.242.000FL</b>	115.0393.145
all chrome, A 215, flexible connection hoses, mains receiver		







**Kitchen • with LEDShine, touch light PRO**


IntelligentControl - electronic control

- touch light PRO technology
- touch'n'flow 1-2-3
  - 3 preset temperatures and flow rates
- Position of control unit only possible on the right side
- gap between wall and centre of mounting hole min. 42 mm
- TouchProtect - anti-scald protection thanks to the "double skin" principle
- Microprocessor-control
  - touch'n'flow 1: cold water, 50% flow rate can be individually adjusted and saved
  - touch'n'flow 2: warm water, 50% flow rate can be individually adjusted and saved
  - touch'n'flow 3: hot water, 50% flow rate can be individually adjusted and saved
  - with cleaning programme
  - duration of water flow - safety indication: switch off automatically after 10 minutes
  - temperature limit can be adjusted
  - hot water disinfection (5 minutes) can be adjusted
  - can be restored to factory settings

- Covered pull-out spray
  - ergonomic spout alignment, shape and handling
  - SprayClean - easy to clean and actively prevents limescale buildup
  - Neoperl® Cascade®
  - PowerClean - needle spray mode, with automatic diverter reset
  - integrated ON/OFF push-button with automatic shut-off after 30 minutes
  - up to 500 mm pull-out length
  - hose surface to fit faucet surface
- SwivelStop - hose guide, swivelling 270°, limitable to 120°
- EasyLock - a pull-out spray that easily slides back into place
- OptimalSpace - ample space for washing or working
- touch light PRO control unit, maintenance-free
  - up-to-date microprocessor and drive technology
  - tried-and-tested valve technology
  - incl. installation materials
  - designed for wired connection to 1 operating unit (standard)
- Flexible connection hoses 3/8"
- Fastening by means of threaded sleeve M33 x 1.5
- Mounting hole size ø35 mm
- Scope of delivery:
  - Mains receiver 100-240 V / operating voltage 15 V / cable length 900 mm
- To be ordered separately (optional or if necessary):
  - Extension set 1500 mm Z.536.352, comprising: stainless steel hose 1500 mm, 3/8" x 3/8", double nipple, sealing material

Flow rate normal spray 9 l/min (3 bar)  
 Flow rate needle spray 10 l/min (3 bar)  
 Acoustic group I

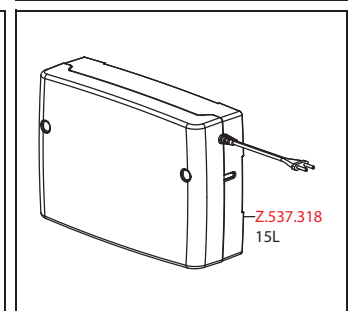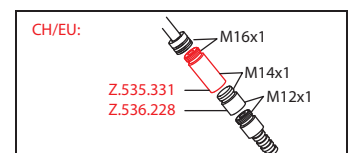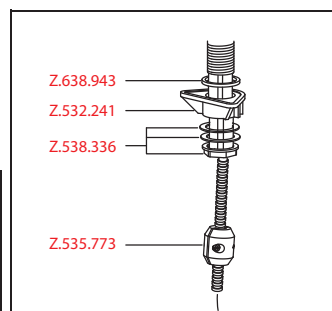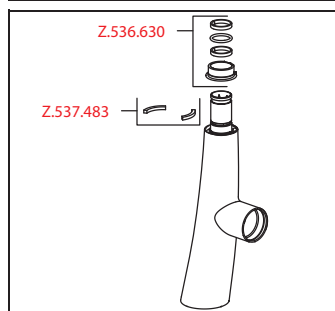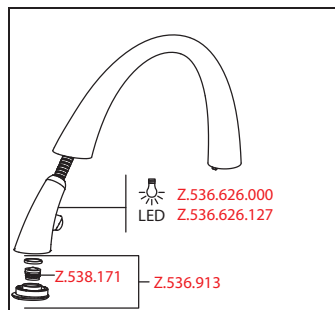

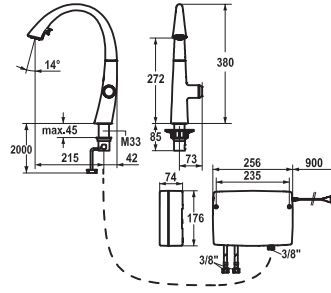

Art.-No.	KWC-No.	FUN
<b>123783</b>	<b>10.201.242.127FL</b>	115.0393.163
decor steel, A 215, flexible connection hoses, mains receiver		







### Kitchen • with LEDShine, touch light PRO


IntelligentControl - electronic control

- touch light PRO technology
- touch'n'flow 1-2-3
  - 3 preset temperatures and flow rates
- Position of control unit only possible on the right side
- gap between wall and centre of mounting hole min. 42 mm
- TouchProtect - anti-scald protection thanks to the "double skin" principle
- Microprocessor-control
  - touch'n'flow 1: cold water, 50% flow rate can be individually adjusted and saved
  - touch'n'flow 2: warm water, 50% flow rate can be individually adjusted and saved
  - touch'n'flow 3: hot water, 50% flow rate can be individually adjusted and saved
  - with cleaning programme
  - duration of water flow - safety indication: switch off automatically after 10 minutes
  - temperature limit can be adjusted
  - hot water disinfection (5 minutes) can be adjusted
  - can be restored to factory settings

- Covered pull-out spray
  - ergonomic spout alignment, shape and handling
  - SprayClean - easy to clean and actively prevents limescale buildup
  - Neoperl® Cascade®
  - PowerClean - needle spray mode, with automatic diverter reset
  - integrated ON/OFF push-button with automatic shut-off after 30 minutes
  - up to 500 mm pull-out length
  - hose surface to fit faucet surface
- SwivelStop - hose guide, swivelling 270°, limitable to 120°
- EasyLock - a pull-out spray that easily slides back into place
- OptimalSpace - ample space for washing or working
- touch light PRO control unit, maintenance-free
  - up-to-date microprocessor and drive technology
  - tried-and-tested valve technology
  - incl. installation materials
  - designed for wired connection to 1 operating unit (standard)
- Flexible connection hoses 3/8"
- Fastening by means of threaded sleeve M33 x 1.5
- Mounting hole size ø35 mm
- Scope of delivery:
  - Mains receiver 100-240 V / operating voltage 15 V / cable length 900 mm
- To be ordered separately (optional or if necessary):
  - Extension set 1500 mm Z.536.352, comprising: stainless steel hose 1500 mm, 3/8" x 3/8", double nipple, sealing material

Flow rate normal spray 9 l/min (3 bar)  
Flow rate needle spray 10 l/min (3 bar)  
Acoustic group I

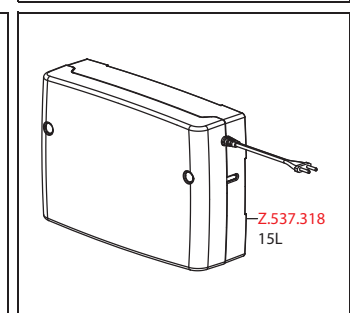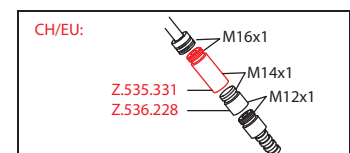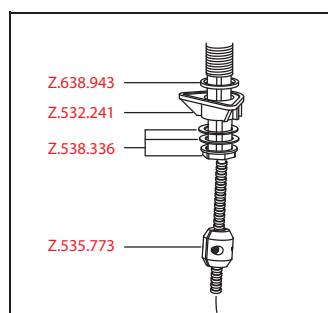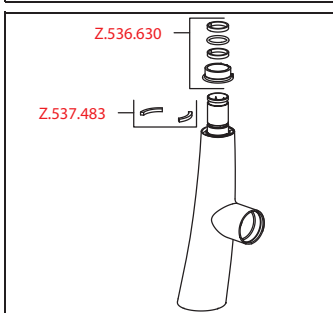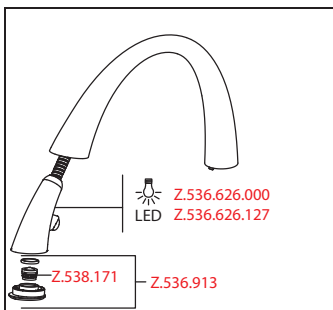

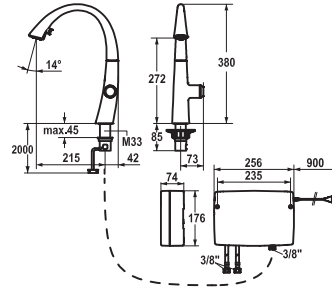

Art.-No.	KWC-No.	FUN
124345	10.201.242.176FL	115.0583.552
matt black, A 215, flexible connection hoses, mains receiver		







**Kitchen • with LEDShine, touch light PRO**


IntelligentControl - electronic control

- touch light PRO technology
- touch'n'flow 1-2-3
  - 3 preset temperatures and flow rates
- Position of control unit only possible on the right side
- gap between wall and centre of mounting hole min. 42 mm
- TouchProtect - anti-scald protection thanks to the "double skin" principle
- Microprocessor-control
  - touch'n'flow 1: cold water, 50% flow rate can be individually adjusted and saved
  - touch'n'flow 2: warm water, 50% flow rate can be individually adjusted and saved
  - touch'n'flow 3: hot water, 50% flow rate can be individually adjusted and saved
  - with cleaning programme
  - duration of water flow - safety indication: switch off automatically after 10 minutes
  - temperature limit can be adjusted
  - hot water disinfection (5 minutes) can be adjusted
  - can be restored to factory settings

- Covered pull-out spray
  - ergonomic spout alignment, shape and handling
  - SprayClean - easy to clean and actively prevents limescale buildup
  - Neoperl® Cascade®
  - PowerClean - needle spray mode, with automatic diverter reset
  - integrated ON/OFF push-button with automatic shut-off after 30 minutes
  - up to 500 mm pull-out length
- SwivelStop - hose guide, swivelling 270° , limitable to 120°
- EasyLock - a pull-out spray that easily slides back into place
- OptimalSpace - ample space for washing or working
- touch light PRO control unit, maintenance-free
  - up-to-date microprocessor and drive technology
  - tried-and-tested valve technology
  - incl. installation materials
  - designed for wired connection to 1 operating unit (standard)
- Flexible connection hoses 3/8"
- Fastening by means of threaded sleeve M33 x 1.5
- Mounting hole size ø35 mm
- Scope of delivery:
  - Mains receiver 100-240 V / operating voltage 15 V / cable length 900 mm
- To be ordered separately (optional or if necessary):
  - Extension set 1500 mm Z.536.352, comprising: stainless steel hose 1500 mm, 3/8" x 3/8", double nipple, sealing material

Flow rate normal spray 9 l/min (3 bar)  
 Flow rate needle spray 10 l/min (3 bar)  
 Acoustic group I

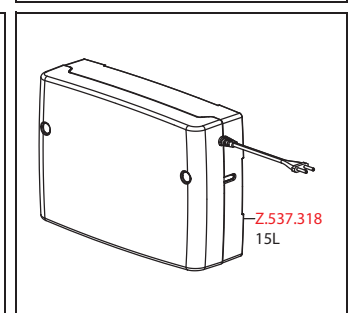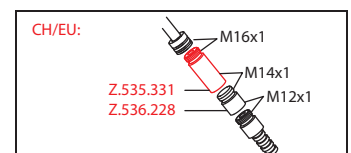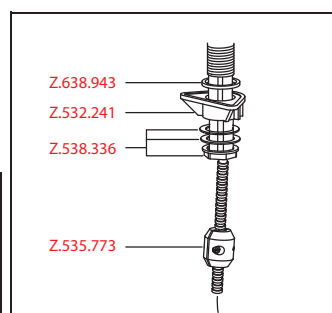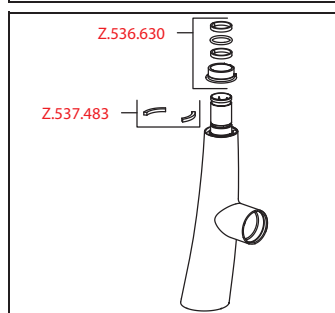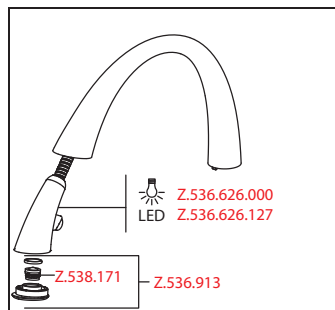

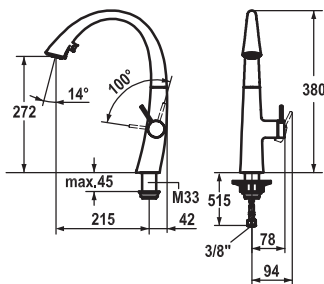

Art.-No.	KWC-No.	FUN
<b>122926</b>	<b>10.201.102.000FL</b>	115.0307.911
all chrome, A 215, flexible connection hoses		
<b>122931</b>	<b>10.201.102.127FL</b>	115.0308.235
decor steel, A 215, flexible connection hoses		

**Lever mixer • Kitchen**







Lever mixer


- Lever installation only possible on the right side
  - Child safety: cold water flow in lever position towards the front
- gap between wall and centre of mounting hole min. 42 mm
- TouchProtect - anti-scald protection thanks to the “double skin” principle
- Covered pull-out spray
  - ergonomic spout alignment, shape and handling
  - SprayClean - easy to clean and actively prevents limescale buildup
  - Neoperl® Cascade®
  - PowerClean - needle spray mode, with automatic diverter reset
  - up to 500 mm pull-out length
  - hose surface to fit faucet surface
- SwivelStop - hose guide, swivelling 270°, limitable to 120°
- EasyLock - a pull-out spray that easily slides back into place
- OptimalSpace - ample space for washing or working
- KWC cartridge S 25
  - with ceramic discs
  - flow rate and temperature continuously variable
- Flexible connection hoses 3/8"
- Fastening by means of threaded sleeve M33 x 1.5
- Mounting hole size ø35 mm

Flow rate normal spray 8 l/min (3 bar)

Flow rate needle spray 9 l/min (3 bar)

Acoustic group II

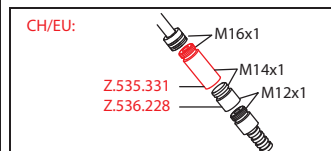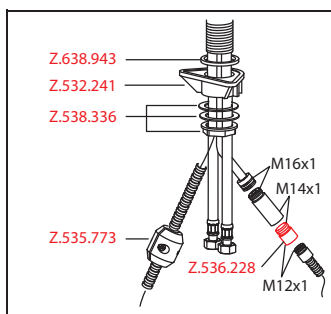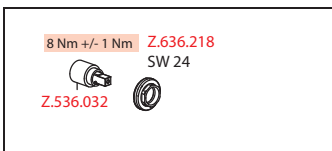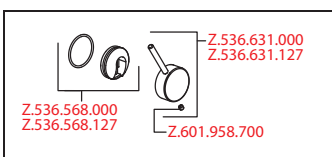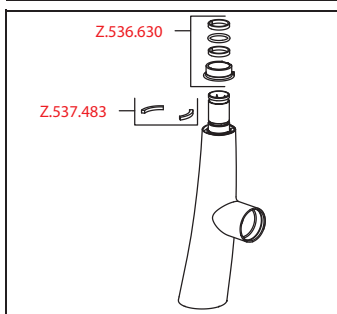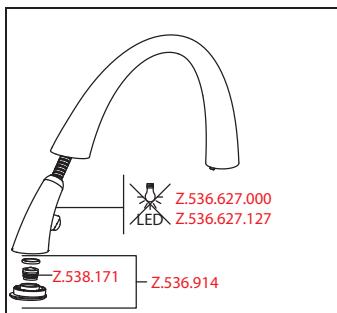

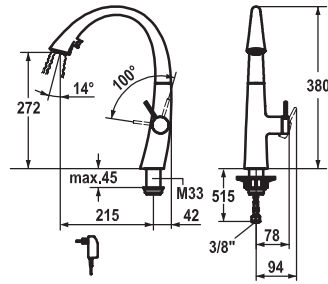

Art.-No.	KWC-No.	FUN
<b>122916</b>	<b>10.201.122.000FL</b>	115.0307.913
all chrome, A 215, flexible connection hoses, mains receiver		
<b>122921</b>	<b>10.201.122.127FL</b>	115.0308.233
decor steel, A 215, flexible connection hoses, mains receiver		








**Lever mixer • Kitchen • with LEDShine**


Lever mixer

- Lever installation only possible on the right side
  - Child safety: cold water flow in lever position towards the front
- gap between wall and centre of mounting hole min. 42 mm
- TouchProtect - anti-scald protection thanks to the "double skin" principle
- Covered pull-out spray
  - ergonomic spout alignment, shape and handling
  - SprayClean - easy to clean and actively prevents limescale buildup
  - Neoperl® Cascade®
  - PowerClean - needle spray mode, with automatic diverter reset
  - integrated ON/OFF push-button with automatic shut-off after 30 minutes
  - up to 500 mm pull-out length
  - hose surface to fit faucet surface

- SwivelStop - hose guide, swivelling 270°, limitable to 120°
- EasyLock - a pull-out spray that easily slides back into place
- OptimalSpace - ample space for washing or working
- KWC cartridge S 25
  - with ceramic discs
  - flow rate and temperature continuously variable
- Flexible connection hoses 3/8"
- Fastening by means of threaded sleeve M33 x 1.5
- Mounting hole size ø35 mm
- Scope of delivery:
  - Mains receiver 100-240 V / operating voltage 6.75 V / cable length 1100 mm

Flow rate normal spray 8 l/min (3 bar)  
 Flow rate needle spray 9 l/min (3 bar)  
 Acoustic group II

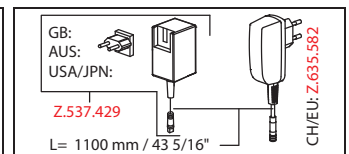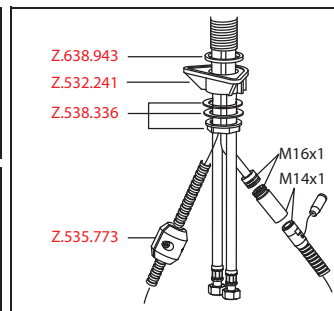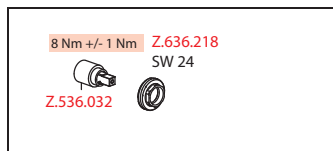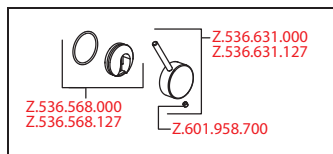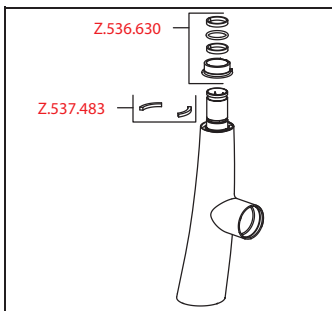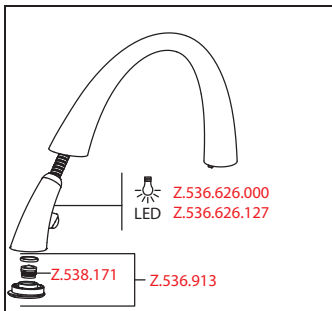

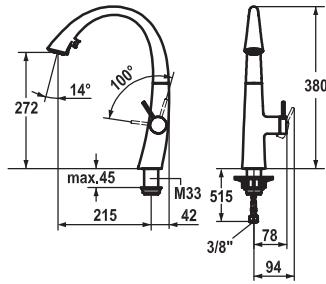

Art.-No.	KWC-No.	FUN
<b>124349</b>	<b>10.201.102.176FL</b>	115.0583.579
matt black, A 215, flexible connection hoses		

### Lever mixer • Kitchen


Lever mixer

- Lever installation only possible on the right side
  - Child safety: cold water flow in lever position towards the front
- gap between wall and centre of mounting hole min. 42 mm
- TouchProtect - anti-scald protection thanks to the "double skin" principle
- Covered pull-out spray
  - ergonomic spout alignment, shape and handling
  - SprayClean - easy to clean and actively prevents limescale buildup
  - Neoperl® Cascade®
  - PowerClean - needle spray mode, with automatic diverter reset
  - up to 500 mm pull-out length
- SwivelStop - hose guide, swivelling 270°, limitable to 120°
- EasyLock - a pull-out spray that easily slides back into place
- OptimalSpace - ample space for washing or working
- KWC cartridge S 25
  - with ceramic discs
  - flow rate and temperature continuously variable
- Flexible connection hoses 3/8"
- Fastening by means of threaded sleeve M33 x 1.5
- Mounting hole size ø35 mm


Flow rate normal spray 8 l/min (3 bar)

Flow rate needle spray 9 l/min (3 bar)

Acoustic group II

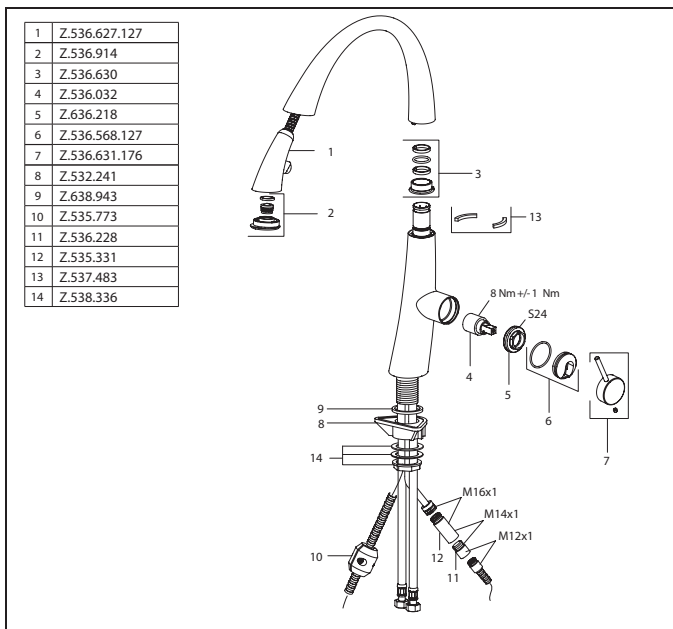



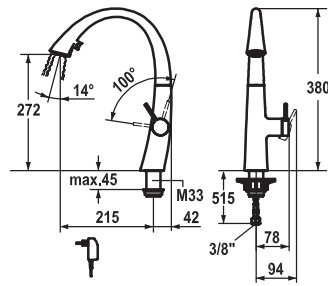

Art.-No.	KWC-No.	FUN
<b>124353</b>	<b>10.201.122.176FL</b>	115.0583.596
matt black, A 215, flexible connection hoses, mains receiver		


**Lever mixer • Kitchen • with LEDShine**


Lever mixer

- Lever installation only possible on the right side
  - Child safety: cold water flow in lever position towards the front
- gap between wall and centre of mounting hole min. 42 mm
- TouchProtect - anti-scald protection thanks to the “double skin” principle
- Covered pull-out spray
  - ergonomic spout alignment, shape and handling
  - SprayClean - easy to clean and actively prevents limescale buildup
  - Neoperl® Cascade®
  - PowerClean - needle spray mode, with automatic diverter reset
  - integrated ON/OFF push-button with automatic shut-off after 30 minutes
  - up to 500 mm pull-out length

- SwivelStop - hose guide, swivelling 270°, limitable to 120°
- EasyLock - a pull-out spray that easily slides back into place
- OptimalSpace - ample space for washing or working
- KWC cartridge S 25
  - with ceramic discs
  - flow rate and temperature continuously variable
- Flexible connection hoses 3/8"
- Fastening by means of threaded sleeve M33 x 1.5
- Mounting hole size ø35 mm
- Scope of delivery:
  - Mains receiver 100-240 V / operating voltage 6.75 V / cable length 1100 mm

Flow rate normal spray 8 l/min (3 bar)  
 Flow rate needle spray 9 l/min (3 bar)  
 Acoustic group II

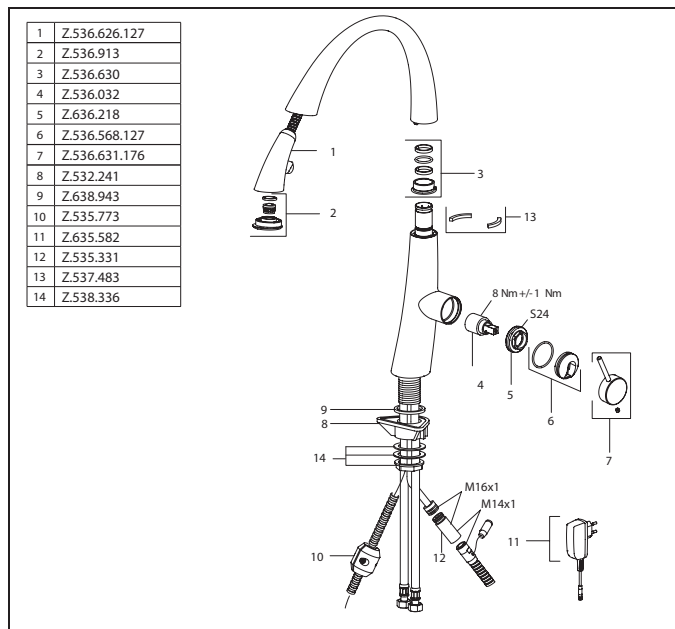



Art.-No.	KWC-No.	FUN
<b>123312</b>	<b>10.201.102.150FL</b>	115.0340.020
glacier white, A 215, flexible connection hoses		

### Lever mixer • Kitchen







Lever mixer


- Lever installation only possible on the right side
  - Child safety: cold water flow in lever position towards the front
- gap between wall and centre of mounting hole min. 42 mm
- TouchProtect - anti-scald protection thanks to the "double skin" principle
- Covered pull-out spray
  - ergonomic spout alignment, shape and handling
  - SprayClean - easy to clean and actively prevents limescale buildup
  - Neoperl® Cascade®
  - PowerClean - needle spray mode, with automatic diverter reset
  - up to 500 mm pull-out length
- SwivelStop - hose guide, swivelling 270°, limitable to 120°
- EasyLock - a pull-out spray that easily slides back into place
- OptimalSpace - ample space for washing or working
- KWC cartridge S 25
  - with ceramic discs
  - flow rate and temperature continuously variable
- Flexible connection hoses 3/8"
- Fastening by means of threaded sleeve M33 x 1.5
- Mounting hole size ø35 mm

Flow rate normal spray 8 l/min (3 bar)

Flow rate needle spray 9 l/min (3 bar)

Acoustic group II

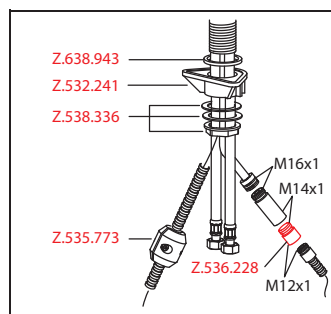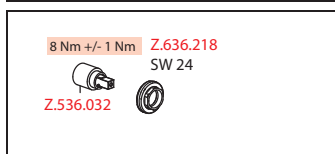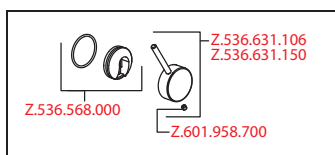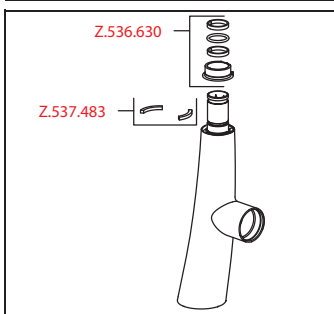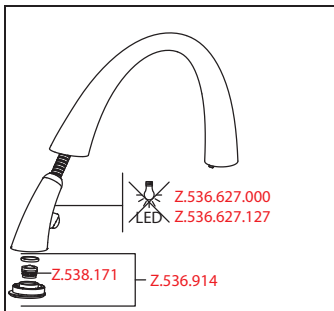

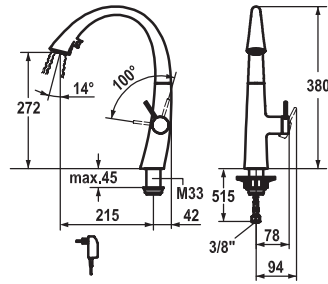

Art.-No.	KWC-No.	FUN
<b>123307</b>	<b>10.201.122.150FL</b>	115.0340.014
glacier white, A 215, flexible connection hoses, mains receiver		








**Lever mixer • Kitchen • with LEDShine**


Lever mixer

- Lever installation only possible on the right side
  - Child safety: cold water flow in lever position towards the front
- gap between wall and centre of mounting hole min. 42 mm
- TouchProtect - anti-scald protection thanks to the “double skin” principle
- Covered pull-out spray
  - ergonomic spout alignment, shape and handling
  - SprayClean - easy to clean and actively prevents limescale buildup
  - Neoperl® Cascade®
  - PowerClean - needle spray mode, with automatic diverter reset
  - integrated ON/OFF push-button with automatic shut-off after 30 minutes
  - up to 500 mm pull-out length

- SwivelStop - hose guide, swivelling 270°, limitable to 120°
- EasyLock - a pull-out spray that easily slides back into place
- OptimalSpace - ample space for washing or working
- KWC cartridge S 25
  - with ceramic discs
  - flow rate and temperature continuously variable
- Flexible connection hoses 3/8"
- Fastening by means of threaded sleeve M33 x 1.5
- Mounting hole size ø35 mm
- Scope of delivery:
  - Mains receiver 100-240 V / operating voltage 6.75 V / cable length 1100 mm

Flow rate normal spray 8 l/min (3 bar)  
 Flow rate needle spray 9 l/min (3 bar)  
 Acoustic group II

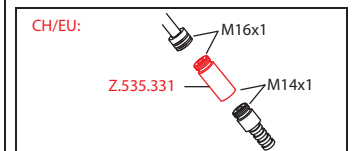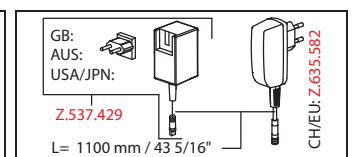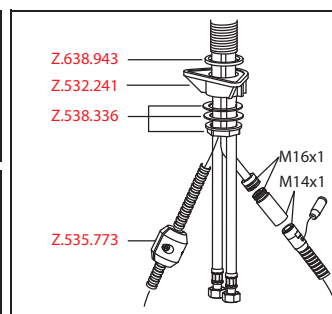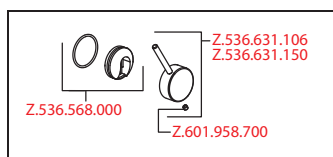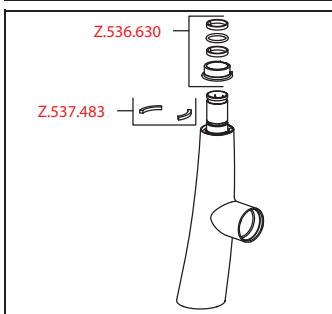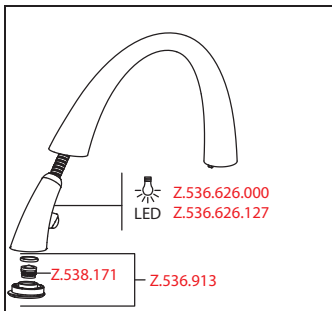

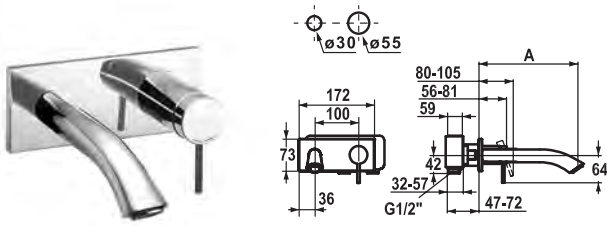






Art.-No.	KWC-No.	FUN
<b>123339</b>	<b>11.202.033.000</b>	113.0360.379
all chrome, A 175, Trim kit		
<b>123335</b>	<b>11.202.034.000</b>	113.0360.380
all chrome, A 225, Trim kit		

**Trim kit • Lever mixer • Basin**

Trim kit Lever mixer

- Fixed spout
  - Neoperl® Caché®
- OptimalSpace - ample space for washing or working
- KWC cartridge S 25
  - with ceramic discs
  - flow rate and temperature continuously variable
- To be ordered separately:
  - Unit for concealed installation 1/2" 39.193.400.931
- To be ordered separately (optional or if necessary):
  - Extension set 20 mm Z.536.333

Flow rate 5 l/min (3 bar)  
Acoustic group I

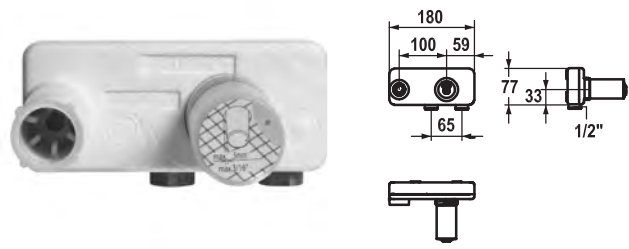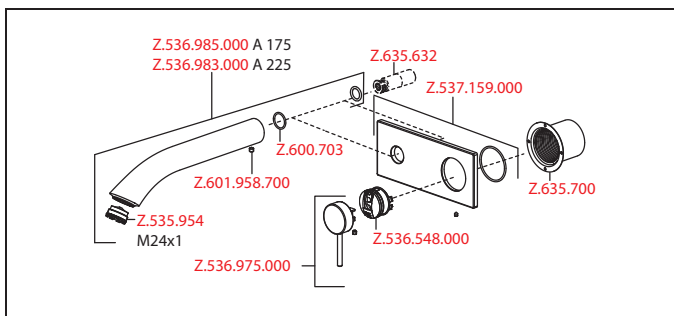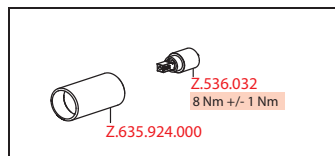


Art.-No.	KWC-No.	FUN
<b>122253</b>	<b>39.193.400.931</b>	112.0308.149
931 roh, Concealed unit		


**Concealed unit**

Concealed unit wall two hole

- Connecting thread 1/2"
- To be ordered separately:
  - Installation kit Z.536.828
- Suitable for:
  - KWC AVA
  - KWC ZOE

Acoustic group I

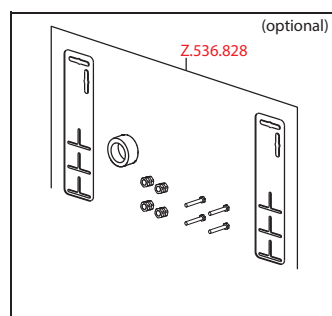




Art.-No.	KWC-No.	FUN
<b>536828</b>	<b>Z.536.828</b>	112.0362.929

Installation kit


- Suitable for:
  - Concealed unit wall two hole



Art.-No.	KWC-No.	FUN
<b>536586</b>	<b>Z.536.586.000</b>	119.0308.341
all chrome		
<b>536587</b>	<b>Z.536.586.127</b>	119.0308.352
decor steel		

### Soap dispenser KWC ZOE


- Easily refillable from top without disassembly
- Mounting hole size  $\varnothing 26$  mm
- Scope of delivery:
  - Pump
  - Soap container, filling capacity 350 ml Z.635.713
- To be ordered separately (optional or if necessary):
  - Escutcheon Z.536.291.000 or Z.536.292.700



Art.-No.	KWC-No.	FUN
<b>536932</b>	<b>Z.536.586.150</b>	119.0340.011
glacier white		

### Soap dispenser KWC ZOE


- Easily refillable from top without disassembly
- Mounting hole size  $\varnothing 26$  mm
- Scope of delivery:
  - Pump
  - Soap container, filling capacity 350 ml Z.635.713
- To be ordered separately (optional or if necessary):
  - Escutcheon Z.536.291.000 or Z.536.292.700



Art.-No.	KWC-No.	FUN
<b>538345</b>	<b>Z.536.586.176</b>	119.0583.600
matt black		

### Soap dispenser KWC ZOE

- Easily refillable from top without disassembly
- Mounting hole size  $\varnothing 26$  mm
- Scope of delivery:
  - Pump
  - Soap container, filling capacity 350 ml Z.635.713
- To be ordered separately (optional or if necessary):
  - Escutcheon Z.536.291.000 or Z.536.292.700

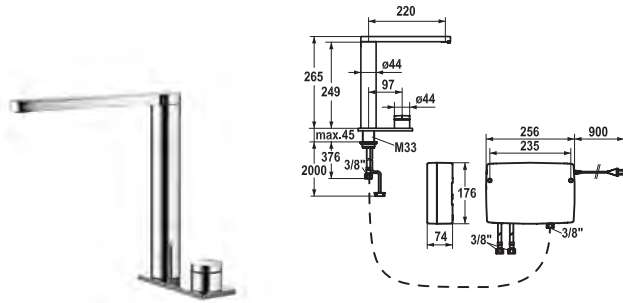


Art.-No.	KWC-No.	FUN
<b>122383</b>	<b>10.651.022.000FL</b>	115.0308.219
all chrome, A 220, flexible connection hoses, mains receiver		

### Kitchen • with LED-technology

IntelligentControl - electronic control

- touch light PRO technology
- touch'n'flow 1-2-3
  - 3 preset temperatures and flow rates
- Microprocessor-control
  - touch'n'flow 1: cold water, 50% flow rate can be individually adjusted and saved
  - touch'n'flow 2: warm water, 50% flow rate can be individually adjusted and saved
  - touch'n'flow 3: hot water, 50% flow rate can be individually adjusted and saved
  - with cleaning programme
  - duration of water flow - safety indication: switch off automatically after 10 minutes
  - temperature limit can be adjusted
  - hot water disinfection (5 minutes) can be adjusted
  - can be restored to factory settings
- Swivel spout 360°
  - Neoperl® SLIM®
- OptimalSpace - ample space for washing or working
- touch light PRO control unit, maintenance-free
  - up-to-date microprocessor and drive technology
  - tried-and-tested valve technology
  - incl. installation materials
  - designed for wired connection to 1 operating unit (standard) , wireless connection to 1 operating unit (optional)
- Flexible connection hoses 3/8"
- Fastening by means of threaded sleeve M33 x 1.5
- Mounting hole size ø35 mm
- Scope of delivery:
  - Mains receiver 100-240 V / operating voltage 15 V / cable length 900 mm
  - Control unit and wired operating unit / cable length 2000 mm
- To be ordered separately (optional or if necessary):
  - Extension set 1500 mm Z.536.352, comprising: stainless steel hose 1500 mm, 3/8" x 3/8", double nipple, sealing material
  - KWC ONO touch light PRO wireless operating unit Z.536.351.000
- Go to [www.kwc.com](http://www.kwc.com) for comprehensive information on planning, installation and operation, or get in touch with your KWC contact person.

Flow rate 12 l/min (3 bar)  
Acoustic group I

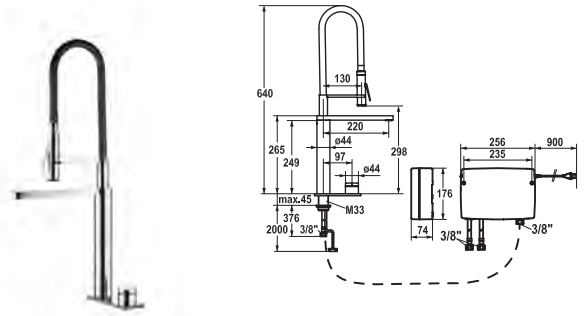


Art.-No.	KWC-No.	FUN
<b>122386</b>	<b>10.651.122.000FL</b>	115.0308.222
all chrome, A 220, flexible connection hoses, mains receiver		

### Kitchen • with LED-technology

IntelligentControl - electronic control

- touch light PRO technology
- HighFlex patented spring hose technology
- touch'n'flow 1-2-3
  - 3 preset temperatures and flow rates
- TouchProtect - anti-scald protection thanks to the "double skin" principle
- Microprocessor-control
  - touch'n'flow 1: cold water, 50% flow rate can be individually adjusted and saved
  - touch'n'flow 2: warm water, 50% flow rate can be individually adjusted and saved
  - touch'n'flow 3: hot water, 50% flow rate can be individually adjusted and saved
  - with cleaning programme
  - duration of water flow - safety indication: switch off automatically after 10 minutes
  - temperature limit can be adjusted
  - hot water disinfection (5 minutes) can be adjusted
  - can be restored to factory settings
- EasyLock - a pull-out spray that easily slides back into place
- Swivel spout 360°
  - Neoperl® SLIM®
- Professional spray 360° turn
  - SprayClean - easy to clean and actively prevents limescale buildup
  - PowerClean - needle spray mode
- OptimalSpace - ample space for washing or working
- touch light PRO control unit, maintenance-free
  - up-to-date microprocessor and drive technology
  - tried-and-tested valve technology
  - incl. installation materials
  - designed for wired connection to 1 operating unit (standard) , wireless connection to 1 operating unit (optional)
- Flexible connection hoses 3/8"
- Fastening by means of threaded sleeve M33 x 1.5
- Mounting hole size ø35 mm
- Scope of delivery:
  - Mains receiver 100-240 V / operating voltage 15 V / cable length 900 mm
  - Control unit and wired operating unit / cable length 2000 mm
- To be ordered separately (optional or if necessary):
  - Extension set 1500 mm Z.536.352, comprising: stainless steel hose 1500 mm, 3/8" x 3/8", double nipple, sealing material
  - KWC ONO touch light PRO wireless operating unit Z.536.351.000
- Go to [www.kwc.com](http://www.kwc.com) for comprehensive information on planning, installation and operation, or get in touch with your KWC contact person.

Flow rate 8 l/min (3 bar)  
Spray: Flow rate 4 l/min (3 bar)  
Acoustic group I

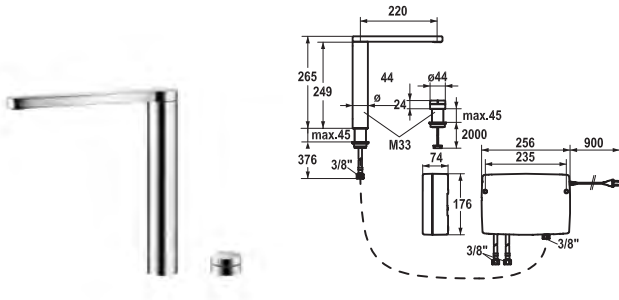


Art.-No.	KWC-No.	FUN
<b>122381</b>	<b>10.652.012.000FL</b>	115.0308.217
all chrome, A 220, flexible connection hoses, mains receiver		

### Kitchen • with LED-technology

IntelligentControl - electronic control

- touch light PRO technology
- touch'n'flow 1-2-3
  - 3 preset temperatures and flow rates
- 2-hole
- Microprocessor-control
  - touch'n'flow 1: cold water, 50% flow rate can be individually adjusted and saved
  - touch'n'flow 2: warm water, 50% flow rate can be individually adjusted and saved
  - touch'n'flow 3: hot water, 50% flow rate can be individually adjusted and saved
  - with cleaning programme
  - duration of water flow - safety indication: switch off automatically after 10 minutes
  - temperature limit can be adjusted
  - hot water disinfection (5 minutes) can be adjusted
  - can be restored to factory settings
- Swivel spout 360°
  - Neoperl® SLIM®
- OptimalSpace - ample space for washing or working
- touch light PRO control unit, maintenance-free
  - up-to-date microprocessor and drive technology
  - tried-and-tested valve technology
  - incl. installation materials
  - designed for wired connection to 1 operating unit (standard) , wireless connection to 1 operating unit (optional)
- Flexible connection hoses 3/8"
- Fastening by means of threaded sleeve M33 x 1.5
- Mounting hole size  $\varnothing 35$  mm
- Scope of delivery:
  - Mains receiver 100-240 V / operating voltage 15 V / cable length 900 mm
  - Control unit and wired operating unit / cable length 2000 mm
- To be ordered separately (optional or if necessary):
  - Extension set 1500 mm Z.536.352, comprising: stainless steel hose 1500 mm, 3/8" x 3/8", double nipple, sealing material
  - KWC ONO touch light PRO wireless operating unit Z.536.351.000
- Go to [www.kwc.com](http://www.kwc.com) for comprehensive information on planning, installation and operation, or get in touch with your KWC contact person.

Flow rate 12 l/min (3 bar)  
Acoustic group I

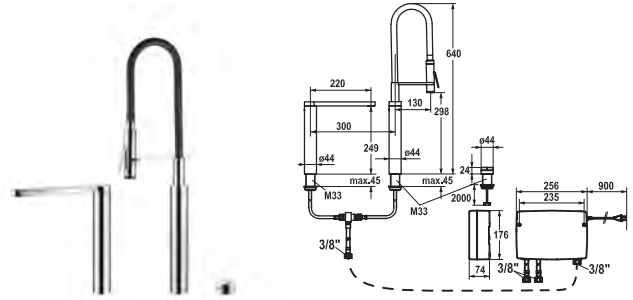

Art.-No.	KWC-No.	FUN
<b>122384</b>	<b>10.653.112.000FL</b>	115.0308.220
all chrome, A 220, flexible connection hoses, mains receiver		


### Kitchen • with LED-technology

IntelligentControl - electronic control

- touch light PRO technology
- HighFlex patented spring hose technology
- touch'n'flow 1-2-3
  - 3 preset temperatures and flow rates
- 3-hole
- TouchProtect - anti-scald protection thanks to the "double skin" principle
- Microprocessor-control
  - touch'n'flow 1: cold water, 50% flow rate can be individually adjusted and saved
  - touch'n'flow 2: warm water, 50% flow rate can be individually adjusted and saved
  - touch'n'flow 3: hot water, 50% flow rate can be individually adjusted and saved
  - with cleaning programme
  - duration of water flow - safety indication: switch off automatically after 10 minutes
  - temperature limit can be adjusted
  - hot water disinfection (5 minutes) can be adjusted
  - can be restored to factory settings
- EasyLock - a pull-out spray that easily slides back into place
- Swivel spout 360°
  - Neoperl® SLIM®
- Professional spray 360° turn
  - SprayClean - easy to clean and actively prevents limescale buildup
  - PowerClean - needle spray mode
- OptimalSpace - ample space for washing or working
- touch light PRO control unit, maintenance-free
  - up-to-date microprocessor and drive technology
  - tried-and-tested valve technology
  - incl. installation materials
  - designed for wired connection to 1 operating unit (standard) , wireless connection to 1 operating unit (optional)
- Flexible connection hoses 3/8"
- Fastening by means of threaded sleeve M33 x 1.5
- Mounting hole size  $\varnothing 35$  mm
- Scope of delivery:
  - Mains receiver 100-240 V / operating voltage / cable length 900 mm
  - Control unit and wired operating unit / cable length 2000 mm
- To be ordered separately (optional or if necessary):
  - Extension set 1500 mm Z.536.352, comprising: stainless steel hose 1500 mm, 3/8" x 3/8", double nipple, sealing material
  - KWC ONO touch light PRO wireless operating unit Z.536.351.000
- Go to [www.kwc.com](http://www.kwc.com) for comprehensive information on planning, installation and operation, or get in touch with your KWC contact person.

Flow rate 9 l/min (3 bar)  
Spray: Flow rate 4 l/min (3 bar)  
Acoustic group I



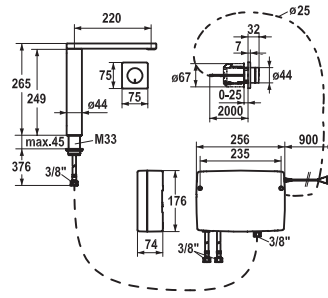

Art.-No.	KWC-No.	FUN
<b>122382</b>	<b>10.651.032.000FL</b>	115.0308.218
all chrome, A 220, flexible connection hoses, mains receiver		
<b>636183</b>	<b>Z.636.183</b>	112.0308.152
Concealed unit		


### Kitchen • with LED-technology

IntelligentControl - electronic control

- touch light PRO technology
- touch'n'flow 1-2-3
  - 3 preset temperatures and flow rates
- Microprocessor-control
  - touch'n'flow 1: cold water, 50% flow rate can be individually adjusted and saved
  - touch'n'flow 2: warm water, 50% flow rate can be individually adjusted and saved
  - touch'n'flow 3: hot water, 50% flow rate can be individually adjusted and saved
  - with cleaning programme
  - duration of water flow - safety indication: switch off automatically after 10 minutes
  - temperature limit can be adjusted
  - hot water disinfection (5 minutes) can be adjusted
  - can be restored to factory settings
- Swivel spout 360°
  - Neoperl® SLIM®
- OptimalSpace - ample space for washing or working
- touch light PRO control unit, maintenance-free
  - up-to-date microprocessor and drive technology
  - tried-and-tested valve technology
  - incl. installation materials
  - designed for wired connection to 1 operating unit (standard), wireless connection to 1 operating unit (optional)
- Flexible connection hoses 3/8"
- Fastening by means of threaded sleeve M33 x 1.5
- Mounting hole size ø35 mm

• Scope of delivery:

- Mains receiver 100-240 V / operating voltage 15 V / cable length 900 mm
- Control unit and wired operating unit / cable length 2000 mm
- To be ordered separately:
  - Rough in for operating unit Z.636.183
- To be ordered separately (optional or if necessary):
  - Extension set 1500 mm Z.536.352, comprising: stainless steel hose 1500 mm, 3/8" x 3/8", double nipple, sealing material
  - KWC ONO touch light PRO wireless operating unit Z.536.351.000
- Go to [www.kwc.com](http://www.kwc.com) for comprehensive information on planning, installation and operation, or get in touch with your KWC contact person.

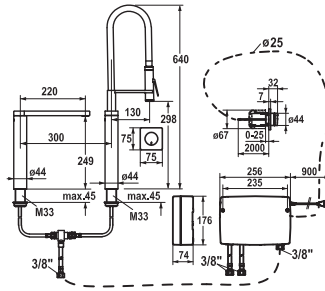

Art.-No.	KWC-No.	FUN
<b>122385</b>	<b>10.652.132.000FL</b>	115.0308.221
all chrome, A 220, flexible connection hoses, mains receiver		
<b>636183</b>	<b>Z.636.183</b>	112.0308.152
Concealed unit		

### Kitchen • with LED-technology

IntelligentControl - electronic control


- touch light PRO technology
- HighFlex patented spring hose technology
- touch'n'flow 1-2-3
  - 3 preset temperatures and flow rates
- 2-hole
- TouchProtect - anti-scald protection thanks to the "double skin" principle
- Microprocessor-control
  - touch'n'flow 1: cold water, 50% flow rate can be individually adjusted and saved
  - touch'n'flow 2: warm water, 50% flow rate can be individually adjusted and saved
  - touch'n'flow 3: hot water, 50% flow rate can be individually adjusted and saved
  - with cleaning programme
  - duration of water flow - safety indication: switch off automatically after 10 minutes
  - temperature limit can be adjusted
  - hot water disinfection (5 minutes) can be adjusted
  - can be restored to factory settings
- EasyLock - a pull-out spray that easily slides back into place
- Swivel spout 360°
  - Neoperl® SLIM®
- Professional spray 360° turn
  - SprayClean - easy to clean and actively prevents limescale buildup
  - PowerClean - needle spray mode
- OptimalSpace - ample space for washing or working
- touch light PRO control unit, maintenance-free
  - up-to-date microprocessor and drive technology
  - tried-and-tested valve technology
  - incl. installation materials
  - designed for wired connection to 1 operating unit (standard) , wireless connection to 1 operating unit (optional)
- Flexible connection hoses 3/8"
- Fastening by means of threaded sleeve M33 x 1.5
- Mounting hole size ø35 mm

- Scope of delivery:
  - Mains receiver 100-240 V / operating voltage 15 V / cable length 900 mm
  - Control unit and wired operating unit / cable length 2000 mm
- To be ordered separately:
  - Rough in for operating unit Z.636.183
- To be ordered separately (optional or if necessary):
  - Extension set 1500 mm Z.536.352, comprising: stainless steel hose 1500 mm, 3/8" x 3/8", double nipple, sealing material
  - KWC ONO touch light PRO wireless operating unit Z.536.351.000
- Go to [www.kwc.com](http://www.kwc.com) for comprehensive information on planning, installation and operation, or get in touch with your KWC contact person.

Flow rate 9 l/min (3 bar)

Spray: Flow rate 4 l/min (3 bar)

Acoustic group I

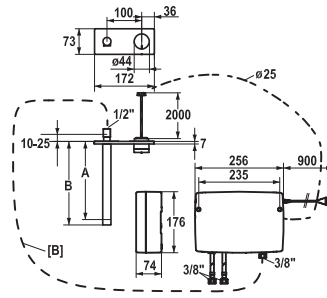


Art.-No.	KWC-No.	FUN
<b>122387</b>	<b>11.654.003.000</b>	115.0308.223
all chrome, A 175, mains receiver, Trim kit		
<b>122388</b>	<b>11.654.004.000</b>	115.0308.224
all chrome, A 225, mains receiver, Trim kit		
<b>122403</b>	<b>39.004.500.931</b>	112.0308.150
Concealed unit		

### Trim kit • Basin • with LED-technology

IntelligentControl - electronic control

- touch light PRO technology
- touch'n'flow 1-2-3
  - 3 preset temperatures and flow rates
- Microprocessor-control
  - touch'n'flow 1: cold water, 50% flow rate can be individually adjusted and saved
  - touch'n'flow 2: warm water, 50% flow rate can be individually adjusted and saved
  - touch'n'flow 3: hot water, 50% flow rate can be individually adjusted and saved
  - with cleaning programme
  - duration of water flow - safety indication: switch off automatically after 10 minutes
  - temperature limit can be adjusted
  - hot water disinfection (5 minutes) can be adjusted
  - can be restored to factory settings
- Fixed spout
  - Neoperl® SLIM®
- OptimalSpace - ample space for washing or working
- touch light PRO control unit, maintenance-free
  - up-to-date microprocessor and drive technology
  - tried-and-tested valve technology
  - incl. installation materials
  - designed for wired connection to 1 operating unit (standard), wireless connection to 1 operating unit (optional)
- Connecting thread 1/2"
  - [B] - Water guidance from control unit to spout: responsibility of client
- Flexible connection hoses 3/8"

- Scope of delivery:
  - Mains receiver 100-240 V / operating voltage 15 V / cable length 900 mm
  - Control unit and wired operating unit / cable length 2000 mm
- To be ordered separately:
  - Unit for concealed installation 39.004.500.931
- To be ordered separately (optional or if necessary):
  - Extension set 1500 mm Z.536.352, comprising: stainless steel hose 1500 mm, 3/8" x 3/8", double nipple, sealing material
  - KWC ONO touch light PRO wireless operating unit Z.536.351.000
- Go to [www.kwc.com](http://www.kwc.com) for comprehensive information on planning, installation and operation, or get in touch with your KWC contact person.

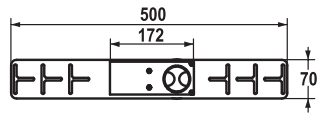


Art.-No.	KWC-No.	FUN
<b>122403</b>	<b>39.004.500.931</b>	112.0308.150
Concealed unit		

Concealed unit wall two hole



Art.-No.	KWC-No.	FUN
<b>636183</b>	<b>Z.636.183</b>	112.0308.152
Concealed unit		


Rough in for touch light PRO operating unit, plastic suitable for installation on brickwork or cavity walls



Art.-No.	KWC-No.	FUN
<b>536351</b>	<b>Z.536.351.000</b>	112.0308.151
all chrome, mains receiver		

**KWC ONO touch light PRO wireless operating unit, with charging station**  
**rechargeable battery life 3-4 months**

- Scope of delivery:
  - Mains receiver 100-240 V / operating voltage 6.75 V / cable length 1100 mm

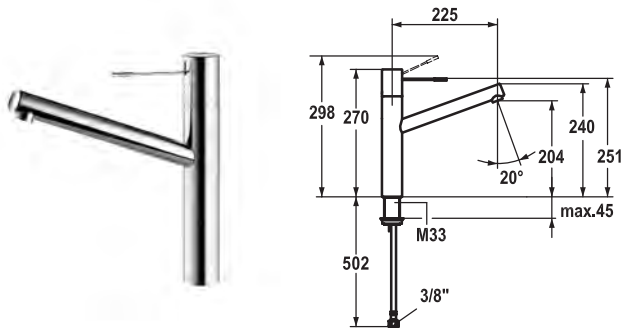


Art.-No.	KWC-No.	FUN
<b>121794</b>	<b>10.151.023.000FL</b>	115.0308.190 all chrome, A 225, flexible connection hoses
<b>121492</b>	<b>10.151.023.700FL</b>	115.0308.184 stainless steel, A 225, flexible connection hoses


### Lever mixer • Kitchen

Lever mixer

- Surgical-grade hardened stainless steel lever
- Swivel spout 270°  
– Neoperl® Caché®
- KWC cartridge M 35 H  
– with ceramic discs  
– flow rate and temperature continuously variable
- Flexible connection hoses 3/8"
- Fastening by means of threaded sleeve M33 x 1.5
- Mounting hole size ø35 mm

Flow rate 12 l/min (3 bar)  
Acoustic group I

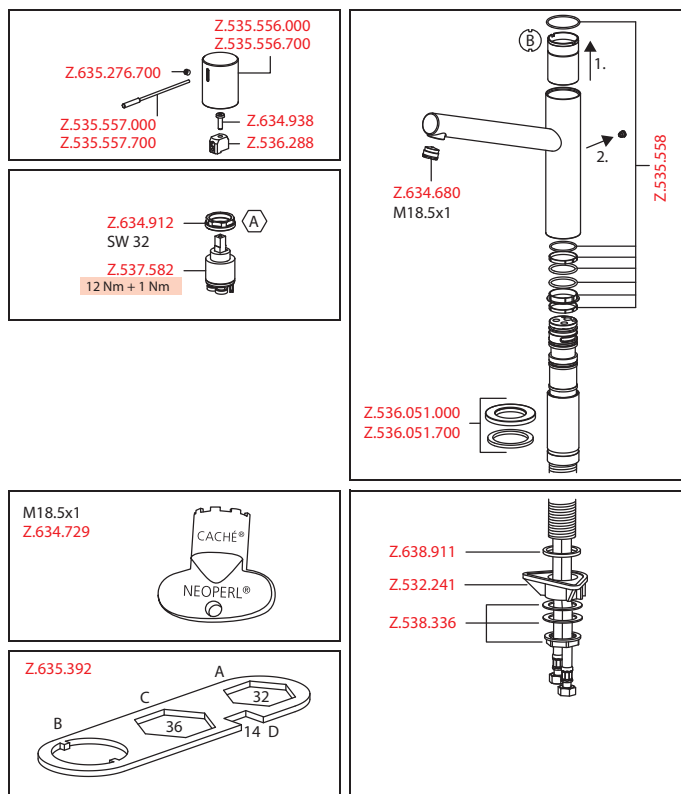

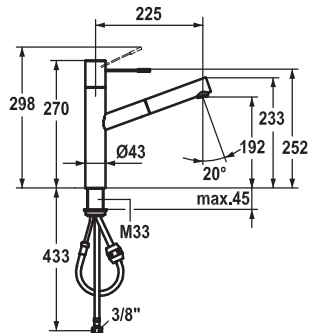



Art.-No.	KWC-No.	FUN
<b>122098</b>	<b>10.151.113.000FL</b>	115.0308.198
all chrome, A 225, flexible connection hoses		
<b>122099</b>	<b>10.151.113.700FL</b>	115.0308.199
stainless steel, A 225, flexible connection hoses		

**Lever mixer • Kitchen**

Lever mixer

- Surgical-grade hardened stainless steel lever
- TouchProtect - anti-scald protection thanks to the "double skin" principle
- Pull-out aerator
  - Neoperl® Cascade®
  - up to 700 mm pull-out length
  - hose surface to fit faucet surface
- Hose guide, swivelling 105°
- EasyLock - a pull-out spray that easily slides back into place
- KWC cartridge M 35 H
  - with ceramic discs
  - flow rate and temperature continuously variable
- Flexible connection hoses 3/8"
- Fastening by means of threaded sleeve M33 x 1.5
- Mounting hole size Ø35 mm

Flow rate 10 l/min (3 bar)  
Acoustic group I

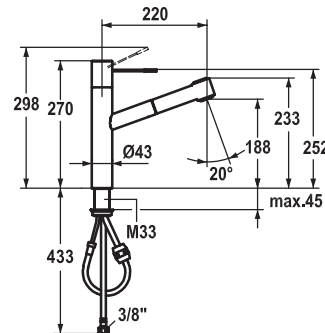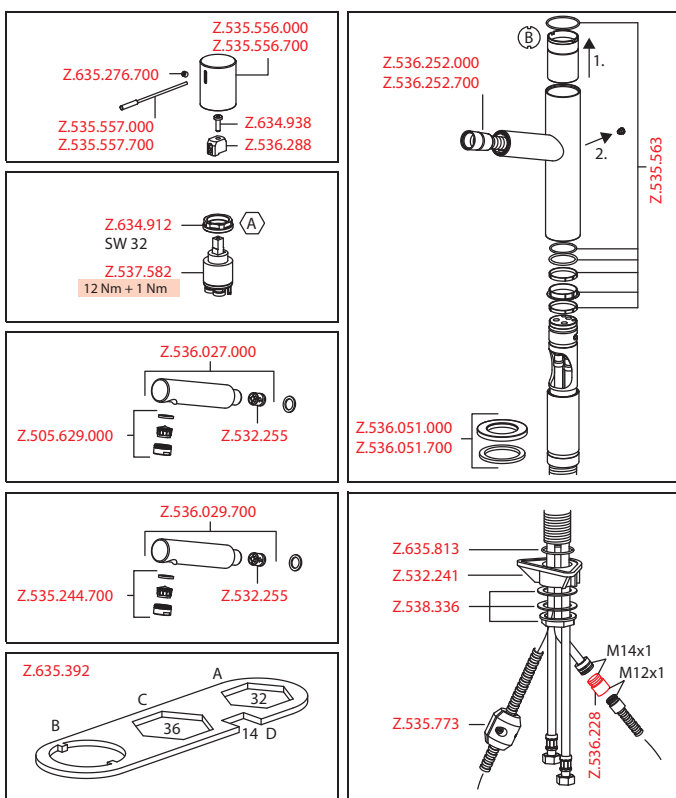


Art.-No.	KWC-No.	FUN
<b>121791</b>	<b>10.151.033.000FL</b>	115.0308.177
all chrome, A 220, flexible connection hoses		
<b>121488</b>	<b>10.151.033.700FL</b>	115.0308.169
stainless steel, A 220, flexible connection hoses		


**Lever mixer • Kitchen**

Lever mixer


- Surgical-grade hardened stainless steel lever
- TouchProtect - anti-scald protection thanks to the "double skin" principle
- Pull-out spray
  - SprayClean - easy to clean and actively prevents limescale buildup
  - up to 700 mm pull-out length
  - PowerClean - needle spray mode, with automatic diverter reset
  - hose surface to fit faucet surface
- Hose guide, swivelling 105°
- EasyLock - a pull-out spray that easily slides back into place
- KWC cartridge M 35 H
  - with ceramic discs
  - flow rate and temperature continuously variable
- Flexible connection hoses 3/8"
- Fastening by means of threaded sleeve M33 x 1.5
- Mounting hole size Ø35 mm

Flow rate normal spray 12 l/min (3 bar)  
Flow rate needle spray 13 l/min (3 bar)  
Acoustic group II

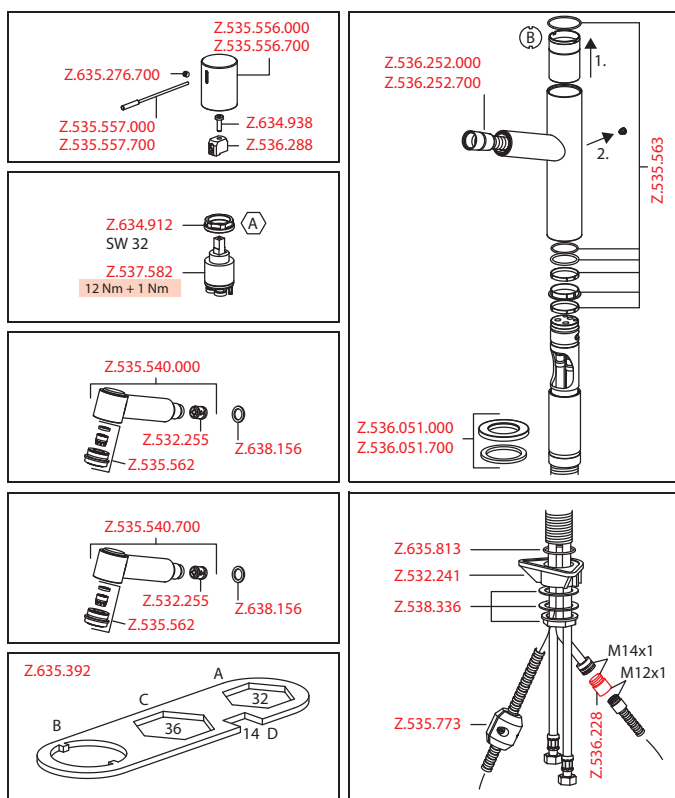

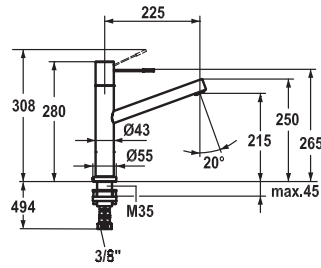

Art.-No.	KWC-No.	FUN
<b>123113</b>	<b>10.151.043.700FL</b>	115.0308.254
stainless steel, A 225, flexible connection hoses		

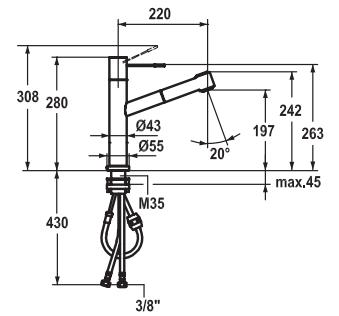





Art.-No.	KWC-No.	FUN
<b>123114</b>	<b>10.151.053.700FL</b>	115.0308.255
stainless steel, A 220, flexible connection hoses		

**Lever mixer • Kitchen • detachable**

Lever mixer

- Detachable for installation below windows - detached 55 mm
- Surgical-grade hardened stainless steel lever
- Intrinsically safe against backflow
- Swivel spout 270°
  - Neoperl® Caché®
- KWC cartridge M 35 H
  - with ceramic discs
  - flow rate and temperature continuously variable
- Flexible connection hoses 3/8"
- Fastening by means of threaded sleeve M35 x 1.5 (preassembled socket)
- Mounting hole size ø35 - 37 mm

Flow rate 11 l/min (3 bar)  
Acoustic group I


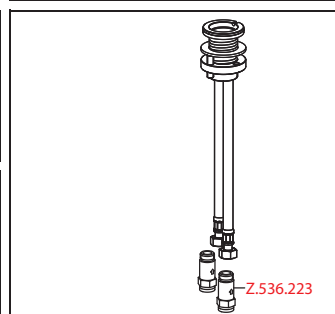
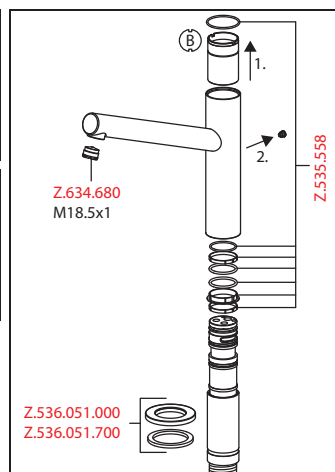
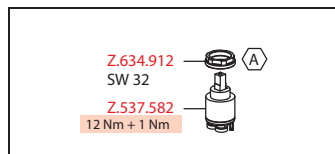
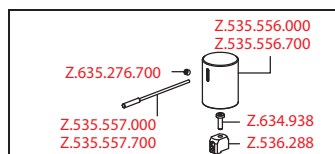



**Lever mixer • Kitchen • detachable**

Lever mixer

- Detachable for installation below windows - detached 55 mm
- Surgical-grade hardened stainless steel lever
- TouchProtect - anti-scald protection thanks to the "double skin" principle
- Intrinsically safe against backflow
- Pull-out spray
  - SprayClean - easy to clean and actively prevents limescale buildup
  - up to 700 mm pull-out length
  - PowerClean - needle spray mode, with automatic diverter reset
  - hose surface to fit faucet surface
- Hose guide, swivelling 105°
- EasyLock - a pull-out spray that easily slides back into place
- KWC cartridge M 35 H
  - with ceramic discs
  - flow rate and temperature continuously variable
- Flexible connection hoses 3/8"
- Fastening by means of threaded sleeve M35 x 1.5 (preassembled socket)
- Mounting hole size ø35 - 37 mm

Flow rate normal spray 9 l/min (3 bar)  
Flow rate needle spray 9 l/min (3 bar)  
Acoustic group II

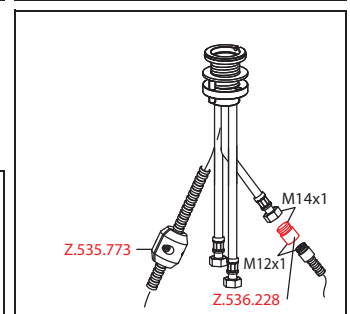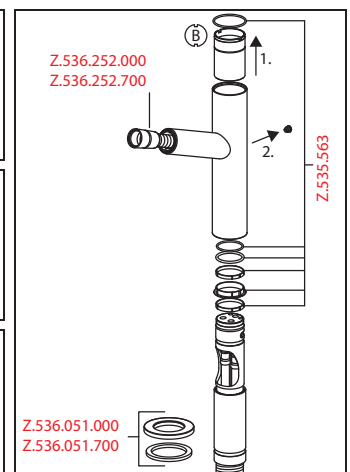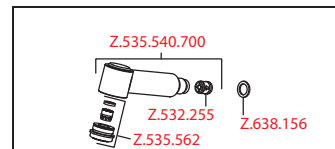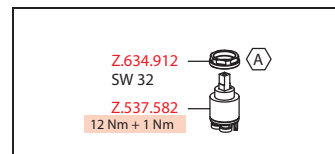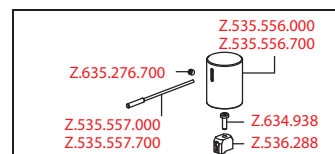

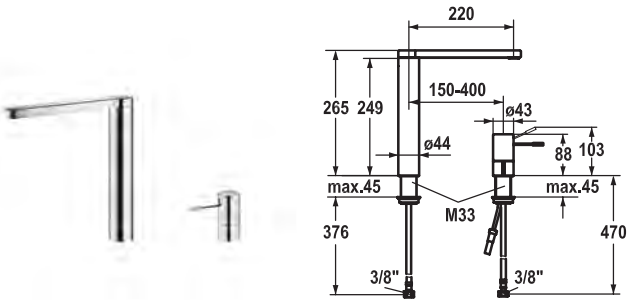



Art.-No.	KWC-No.	FUN
<b>122090</b>	<b>10.152.413.000FL</b>	115.0308.196
all chrome, A 220, flexible connection hoses		

**Lever mixer • Kitchen**

Lever mixer

- 2-hole
- Lever installation possible on the right or left side
- Surgical-grade hardened stainless steel lever
- Swivel spout 360°
  - Neoperl® SLIM®
- OptimalSpace - ample space for washing or working
- KWC cartridge M 35 H
  - with ceramic discs
  - flow rate and temperature continuously variable
- Flexible connection hoses 3/8"
- Fastening by means of threaded sleeve M33 x 1.5
- Mounting hole size ø35 mm

Flow rate 12 l/min (3 bar)  
Acoustic group II

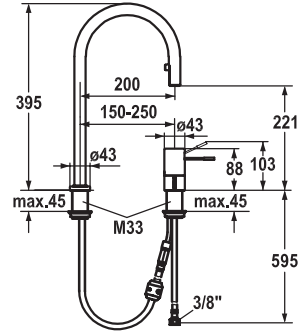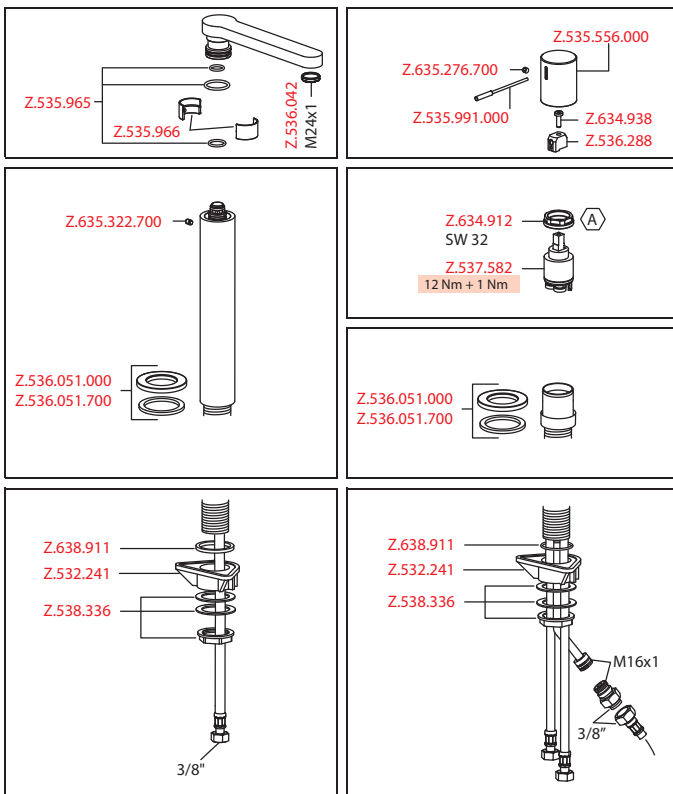


Art.-No.	KWC-No.	FUN
<b>122088</b>	<b>10.152.322.000FL</b>	115.0308.194
all chrome, A 200, flexible connection hoses		

**Lever mixer • Kitchen**


Lever mixer

- 2-hole
- Lever installation possible on the right or left side
- Surgical-grade hardened stainless steel lever
- TouchProtect - anti-scald protection thanks to the "double skin" principle
- Pull-out aerator covered
  - Neoperl® Caché®
  - hose surface to fit faucet surface
- Hose guide, swivelling 360°
- EasyLock - a pull-out spray that easily slides back into place
- OptimalSpace - ample space for washing or working
- KWC cartridge M 35 H
  - with ceramic discs
  - flow rate and temperature continuously variable
- Flexible connection hoses 3/8"
- Fastening by means of threaded sleeve M33 x 1.5
- Mounting hole size ø35 mm


Flow rate 10 l/min (3 bar)  
Acoustic group II

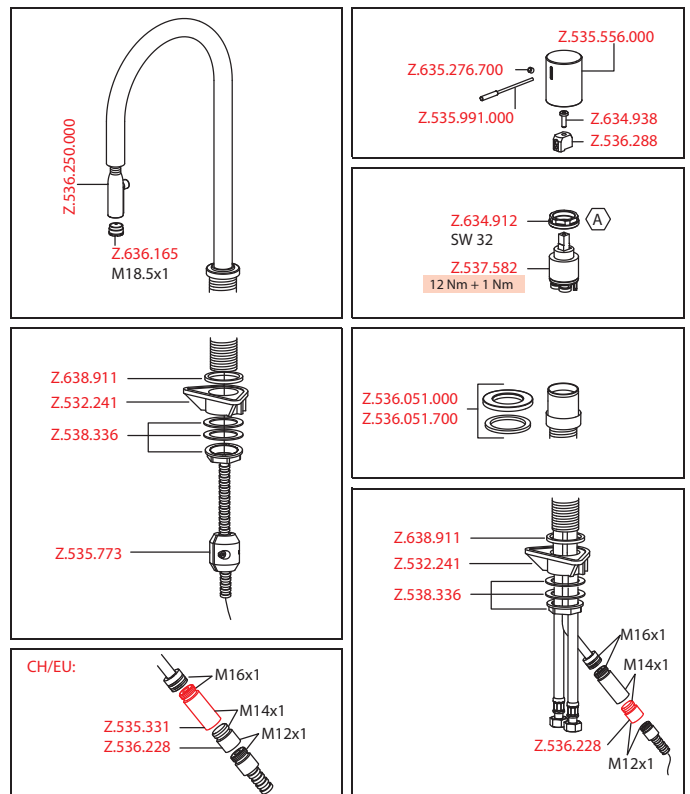



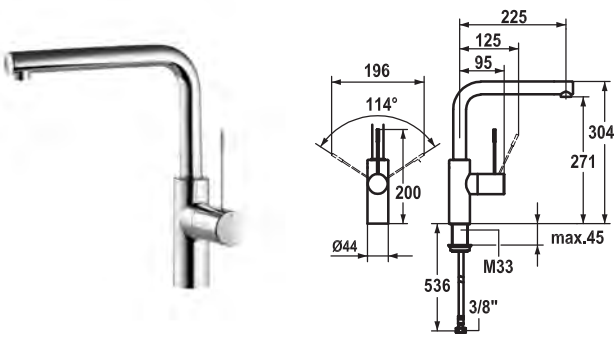

Art.-No.	KWC-No.	FUN
<b>121858</b>	<b>10.151.013.000FL</b>	115.0308.193
all chrome, A 225, flexible connection hoses		

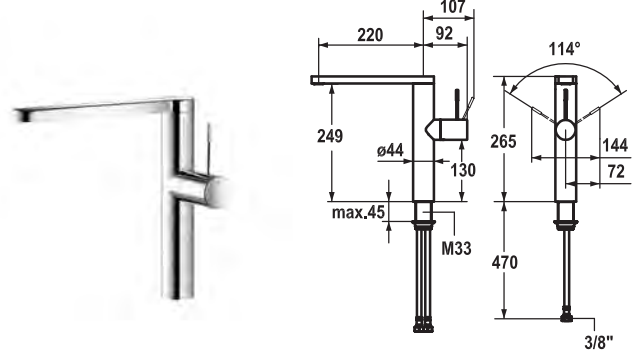

Art.-No.	KWC-No.	FUN
<b>121751</b>	<b>10.151.413.000FL</b>	115.0308.170
all chrome, A 220, flexible connection hoses		
<b>122257</b>	<b>10.151.413.700FL</b>	115.0308.208
stainless steel, A 220, flexible connection hoses		

**Lever mixer • Kitchen**

Lever mixer

- Lever installation possible on the right or left side
- Surgical-grade hardened stainless steel lever
- Swivel spout 360°
  - Neoperl® Caché®
- OptimalSpace - ample space for washing or working
- KWC cartridge M 35 H
  - with ceramic discs
  - flow rate and temperature continuously variable
- Flexible connection hoses 3/8"
- Fastening by means of threaded sleeve M33 x 1.5
- Mounting hole size Ø35 mm
- To be ordered separately (optional or if necessary):
  - Short lever, L 70 mm Z.535.995


Flow rate 12 l/min (3 bar)  
Acoustic group I


**Lever mixer • Kitchen**

Lever mixer

- Lever installation possible on the right or left side
- Surgical-grade hardened stainless steel lever
- Swivel spout 360°
  - Neoperl® SLIM®
- OptimalSpace - ample space for washing or working
- KWC cartridge M 35 H
  - with ceramic discs
  - flow rate and temperature continuously variable
- Flexible connection hoses 3/8"
- Fastening by means of threaded sleeve M33 x 1.5
- Mounting hole size Ø35 mm

Flow rate 11 l/min (3 bar)  
Acoustic group II


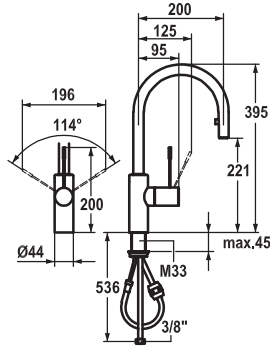
Art.-No.	KWC-No.	FUN
<b>121797</b>	<b>10.151.102.000FL</b>	115.0308.191
all chrome, A 200, flexible connection hoses		
<b>121496</b>	<b>10.151.102.700FL</b>	115.0308.185
stainless steel, A 200, flexible connection hoses		

**Lever mixer • Kitchen**

Lever mixer

- Lever installation possible on the right or left side
- Surgical-grade hardened stainless steel lever
- TouchProtect - anti-scald protection thanks to the "double skin" principle
- Pull-out aerator covered
  - Neoperl® Caché®
  - up to 700 mm pull-out length
  - hose surface to fit faucet surface
- Hose guide, swivelling 360°
- EasyLock - a pull-out spray that easily slides back into place
- OptimalSpace - ample space for washing or working
- KWC cartridge M 35 H
  - with ceramic discs
  - flow rate and temperature continuously variable
- Flexible connection hoses 3/8"
- Fastening by means of threaded sleeve M33 x 1.5
- Mounting hole size ø35 mm
- To be ordered separately (optional or if necessary):
  - Short lever, L 70 mm Z.535.995

Flow rate 10 l/min (3 bar)  
Acoustic group II

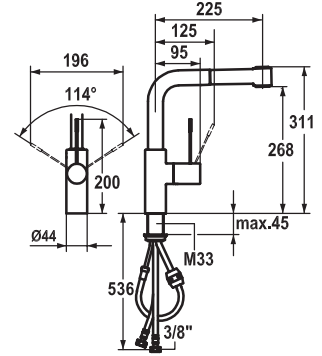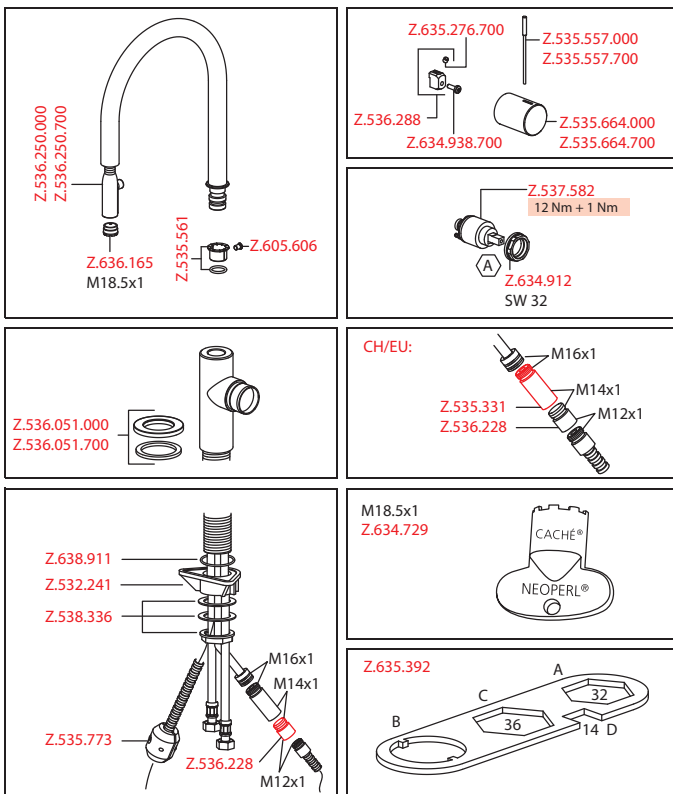


Art.-No.	KWC-No.	FUN
<b>121855</b>	<b>10.151.003.000FL</b>	115.0308.192
all chrome, A 225, flexible connection hoses		


**Lever mixer • Kitchen**

Lever mixer

- Lever installation possible on the right or left side
- Surgical-grade hardened stainless steel lever
- TouchProtect - anti-scald protection thanks to the "double skin" principle
- Pull-out spray
  - SprayClean - easy to clean and actively prevents limescale buildup
  - up to 700 mm pull-out length
  - PowerClean - needle spray mode, with automatic diverter reset
  - hose surface to fit faucet surface
- Hose guide, swivelling 360°
- EasyLock - a pull-out spray that easily slides back into place
- OptimalSpace - ample space for washing or working
- KWC cartridge M 35 H
  - with ceramic discs
  - flow rate and temperature continuously variable
- Flexible connection hoses 3/8"
- Fastening by means of threaded sleeve M33 x 1.5
- Mounting hole size ø35 mm
- To be ordered separately (optional or if necessary):
  - Short lever, L 70 mm Z.535.995

Flow rate normal spray 12 l/min (3 bar)  
Flow rate needle spray 13 l/min (3 bar)  
Acoustic group II

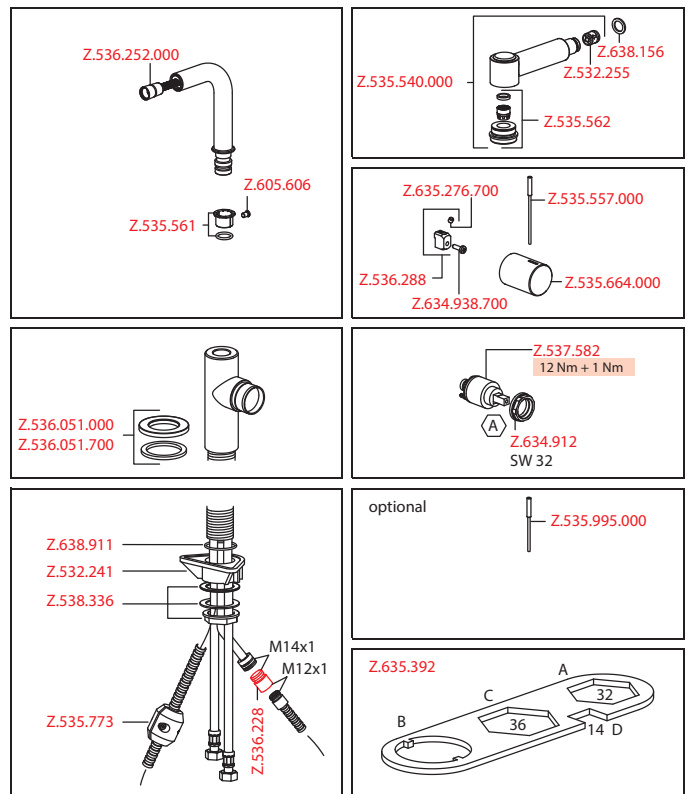

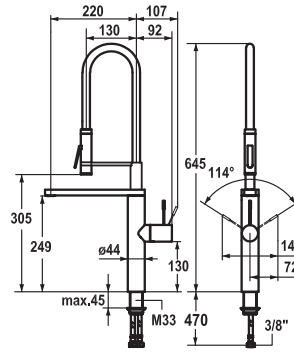

Art.-No.	KWC-No.	FUN
<b>121753</b>	<b>10.151.423.000FL</b>	115.0307.905 all chrome, A 220, flexible connection hoses
<b>122252</b>	<b>10.151.423.700FL</b>	115.0308.207 stainless steel, A 220, flexible connection hoses


**Lever mixer • Kitchen**


Lever mixer

- HighFlex patented spring hose technology
- Lever installation possible on the right or left side
- Surgical-grade hardened stainless steel lever
- TouchProtect - anti-scald protection thanks to the "double skin" principle
- Integrated vacuum diversion
- EasyLock - a pull-out spray that easily slides back into place
- Swivel spout 360°
  - Neoperl® SLIM®

- Professional spray 360° turn
  - SprayClean - easy to clean and actively prevents limescale buildup
  - PowerClean - needle spray mode
- OptimalSpace - ample space for washing or working
- KWC cartridge M 35 H
  - with ceramic discs
  - flow rate and temperature continuously variable
- Flexible connection hoses 3/8"
- Fastening by means of threaded sleeve M33 x 1.5
- Mounting hole size ø35 mm
- Scope of delivery:
  - Spray holder Z.535.963

Flow rate 11 l/min (3 bar)  
 Spray: Flow rate 3 l/min (3 bar)  
 Acoustic group I

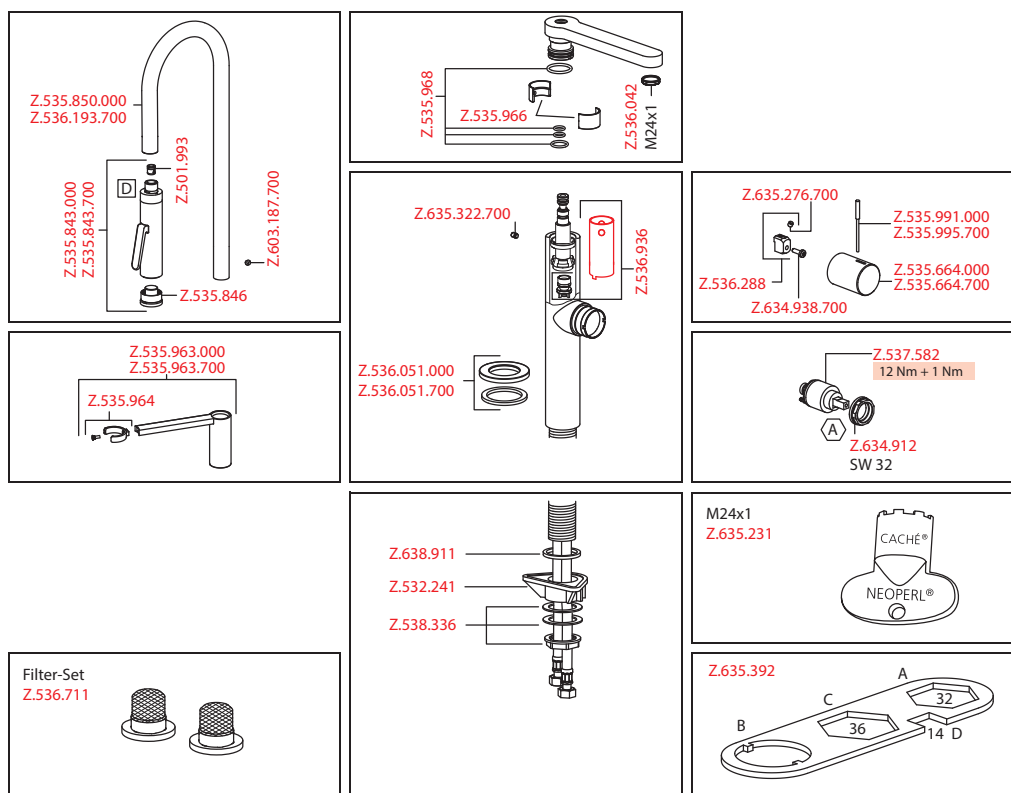

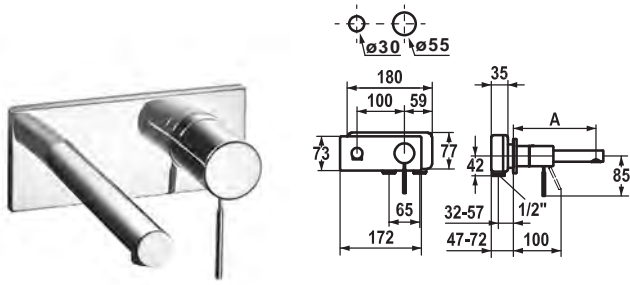






Art.-No.	KWC-No.	FUN
<b>122045</b>	<b>11.152.033.000</b>	115.0308.178
all chrome, A 175, Trim kit		
<b>122046</b>	<b>11.152.034.000</b>	115.0308.179
all chrome, A 225, Trim kit		

**Trim kit • Lever mixer • Basin**

Trim kit Lever mixer

- Surgical-grade hardened stainless steel lever
- Fixed spout
  - Neoperl® Caché®
- OptimalSpace - ample space for washing or working
- KWC cartridge M 35
  - with ceramic discs
  - flow rate and temperature continuously variable
  - temperature limitation
- To be ordered separately:
  - Unit for concealed installation 1/2" 39.151.400.931
- To be ordered separately (optional or if necessary):
  - Extension set 20 mm Z.536.333

Flow rate 5 l/min (3 bar)  
Acoustic group I

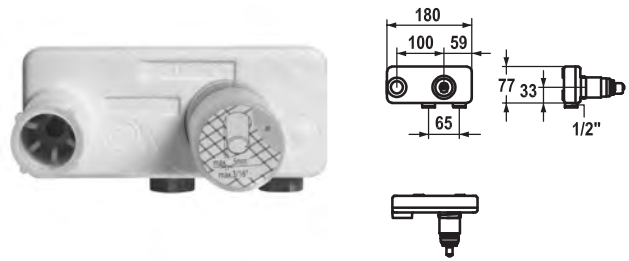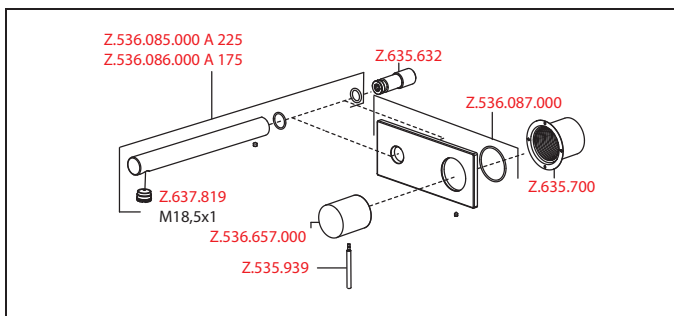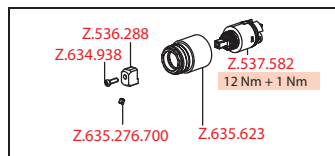



Art.-No.	KWC-No.	FUN
<b>122047</b>	<b>39.151.400.931</b>	112.0308.148
all chrome, Concealed unit		

**Concealed unit**

Concealed unit wall two hole

- Connecting thread 1/2"
- To be ordered separately:
  - Installation kit Z.536.828
- Suitable for:
  - KWC ONO

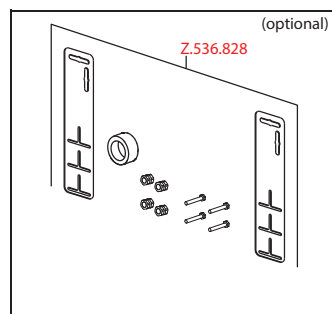




Art.-No.	KWC-No.	FUN
<b>536828</b>	<b>Z.536.828</b>	112.0362.929

#### Installation kit

- Suitable for:
  - Concealed unit wall two hole

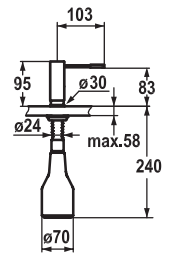


Art.-No.	KWC-No.	FUN
<b>536060</b>	<b>Z.536.060.000</b>	119.0307.908
all chrome		
<b>536061</b>	<b>Z.536.060.700</b>	119.0308.343
stainless steel		

#### Soap dispensers

Soap dispenser KWC ONO

- Easily refillable from top without disassembly
- Mounting hole size  $\varnothing 26$  mm
- Scope of delivery:
  - Pump
  - Soap container, filling capacity 350 ml Z.635.713
- To be ordered separately (optional or if necessary):
  - Escutcheon Z.536.291.000 or Z.536.292.700

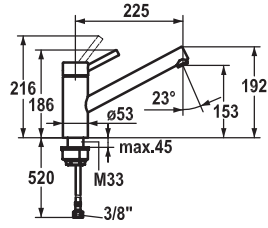



Art.-No.	KWC-No.	FUN
<b>121501</b>	<b>10.271.023.700FL</b>	115.0315.697
stainless steel, A 225, flexible connection hoses		

**Lever mixer • Kitchen**

Lever mixer

- Swivel spout 160°
  - Neoperl® Cascade®
- KWC cartridge L 39 - universal
  - with ceramic discs
  - flow rate and temperature continuously variable
  - temperature and flow rate limitation
- Flexible connection hoses 3/8"
- Fastening by means of threaded sleeve M33 x 1.5
- Mounting hole size ø35 mm

Flow rate 12 l/min (3 bar)  
Acoustic group I

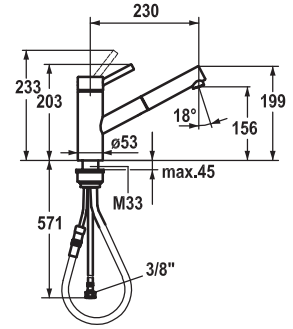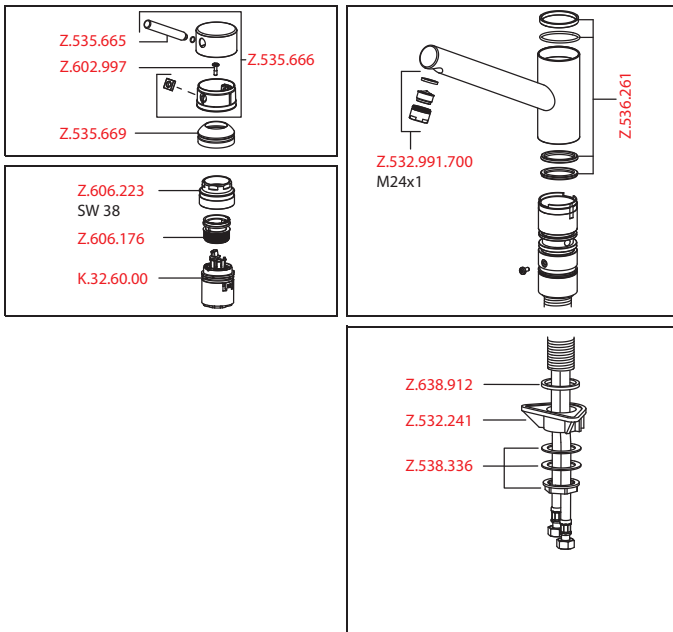


Art.-No.	KWC-No.	FUN
<b>121513</b>	<b>10.271.103.700FL</b>	115.0315.658
stainless steel, A 230, flexible connection hoses		


**Lever mixer • Kitchen**

Lever mixer

- TouchProtect - anti-scald protection thanks to the "double skin" principle
- Pull-out aerator
  - Neoperl® Cascade®
  - up to 700 mm pull-out length
  - hose surface to fit faucet surface
- Hose guide, swivelling 130°
- EasyLock - a pull-out spray that easily slides back into place
- KWC cartridge L 39 - universal
  - with ceramic discs
  - flow rate and temperature continuously variable
  - temperature and flow rate limitation
- Flexible connection hoses 3/8"
- Fastening by means of threaded sleeve M33 x 1.5
- Mounting hole size ø35 mm

Flow rate 12 l/min (3 bar)  
Acoustic group I

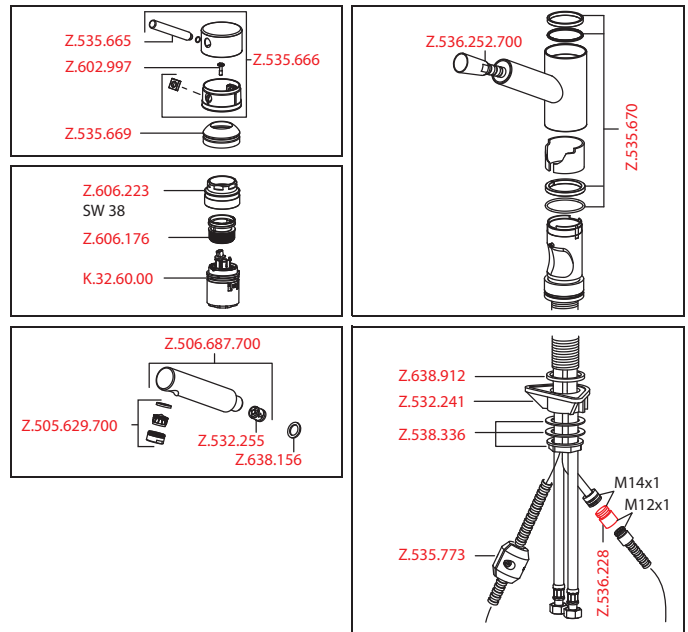


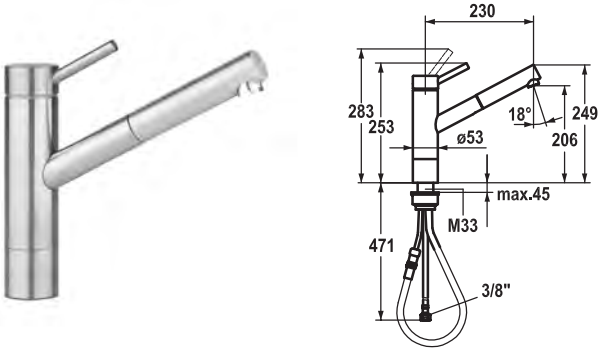


Art.-No.	KWC-No.	FUN
<b>121517</b>	<b>10.271.303.700FL</b>	115.0315.698
stainless steel, A 230, flexible connection hoses		

**Lever mixer • Kitchen**

- Lever mixer
- Socket 50 mm
  - TouchProtect - anti-scald protection thanks to the "double skin" principle
  - Pull-out aerator
    - Neoperl® Cascade®
    - up to 700 mm pull-out length
    - hose surface to fit faucet surface
  - Hose guide, swivelling 130°
  - EasyLock - a pull-out spray that easily slides back into place
  - OptimalSpace - ample space for washing or working
  - KWC cartridge L 39 - universal
    - with ceramic discs
    - flow rate and temperature continuously variable
    - temperature and flow rate limitation
  - Flexible connection hoses 3/8"
  - Fastening by means of threaded sleeve M33 x 1.5
  - Mounting hole size 35 mm

Flow rate 12 l/min (3 bar)  
Acoustic group I

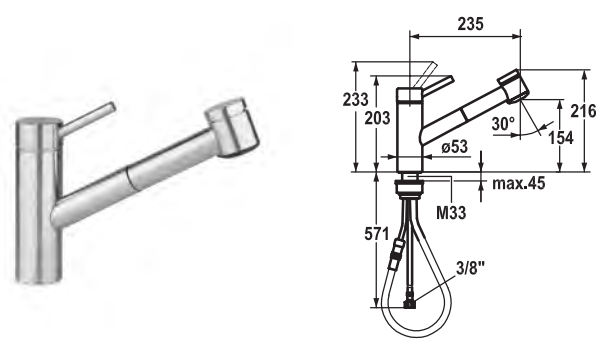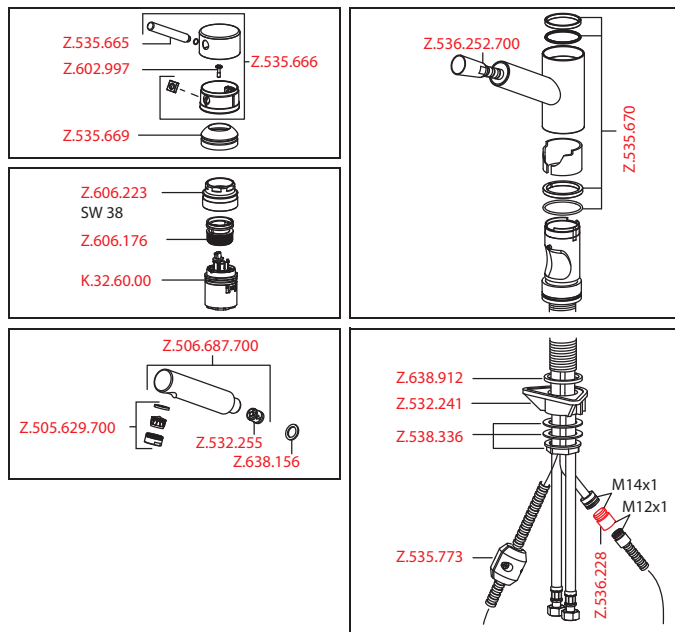



Art.-No.	KWC-No.	FUN
<b>121505</b>	<b>10.271.033.700FL</b>	115.0315.656
stainless steel, A 235, flexible connection hoses		
<b>121509</b>	<b>10.271.033.736FL</b>	115.0315.657
stainless steel/matte black, A 235, flexible connection hoses		

**Lever mixer • Kitchen**

- Lever mixer
- TouchProtect - anti-scald protection thanks to the "double skin" principle
  - Pull-out spray
    - SprayClean - easy to clean and actively prevents limescale buildup
    - up to 700 mm pull-out length
    - SprayLock - lockable jet spray
    - PowerClean - needle spray mode, with automatic diverter reset
    - hose surface to fit faucet surface
  - Hose guide, swivelling 130°
  - EasyLock - a pull-out spray that easily slides back into place
  - KWC cartridge L 39 - universal
    - with ceramic discs
    - flow rate and temperature continuously variable
    - temperature and flow rate limitation
  - Flexible connection hoses 3/8"
  - Fastening by means of threaded sleeve M33 x 1.5
  - Mounting hole size 35 mm

Flow rate normal spray 12 l/min (3 bar)  
Flow rate needle spray 13 l/min (3 bar)  
Acoustic group I

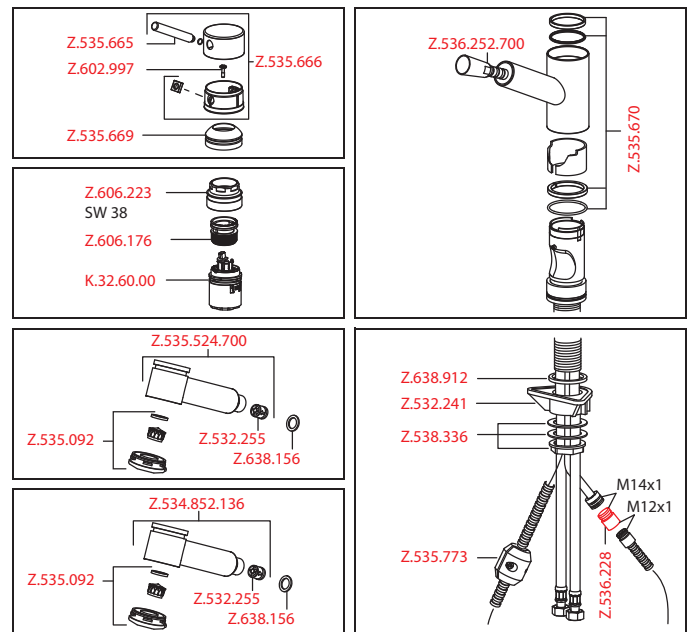

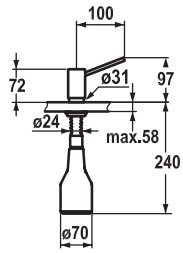


Art.-No.	KWC-No.	FUN
<b>536062</b>	<b>Z.536.062.700</b>	119.0310.326
stainless steel		

### Soap dispensers

Soap dispenser KWC INOX

- Easily refillable from top without disassembly
- Mounting hole size  $\varnothing 26$  mm
- Scope of delivery:
  - Pump
  - Soap container, filling capacity 350 ml Z.635.713



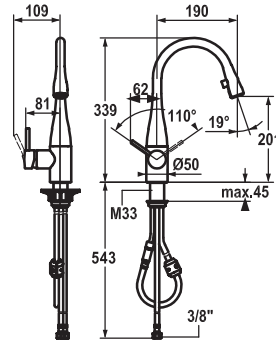

Art.-No.	KWC-No.	FUN
<b>121619</b>	<b>10.111.102.000FL</b>	115.0307.892
all chrome, A 190, flexible connection hoses		
<b>121617</b>	<b>10.111.102.700FL</b>	115.0307.893
stainless steel, A 190, flexible connection hoses		


**Lever mixer • Kitchen**

Lever mixer

- Lever installation possible on the right or left side
- TouchProtect - anti-scald protection thanks to the "double skin" principle
- Pull-out aerator covered
  - Neoperl® Caché®
  - up to 600 mm pull-out length
  - hose surface to fit faucet surface
- Hose guide, swivelling 320°
- EasyLock - a pull-out spray that easily slides back into place
- KWC cartridge M 35
  - with ceramic discs
  - flow rate and temperature continuously variable
- Flexible connection hoses 3/8"
- Fastening by means of threaded sleeve M33 x 1.5
- Mounting hole size ø35 mm

Flow rate 11 l/min (3 bar)  
Acoustic group I

<p>CH/EU:</p>		
<p>M18.5x1 Z.634.729</p>		

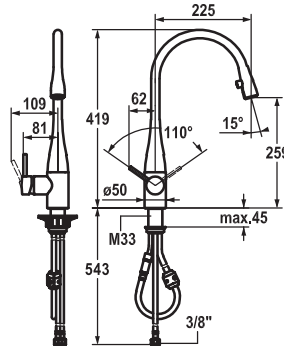

Art.-No.	KWC-No.	FUN
<b>121241</b>	<b>10.111.103.000FL</b>	115.0308.181
all chrome, A 225, flexible connection hoses		
<b>121326</b>	<b>10.111.103.700FL</b>	115.0308.183
stainless steel, A 225, flexible connection hoses		


**Lever mixer • Kitchen**

Lever mixer

- Lever installation possible on the right or left side
- TouchProtect - anti-scald protection thanks to the "double skin" principle
- Pull-out aerator covered
  - Neoperl® Caché®
  - up to 600 mm pull-out length
  - hose surface to fit faucet surface
- Hose guide, swivelling 320°
- EasyLock - a pull-out spray that easily slides back into place
- OptimalSpace - ample space for washing or working
- KWC cartridge M 35
  - with ceramic discs
  - flow rate and temperature continuously variable
- Flexible connection hoses 3/8"
- Fastening by means of threaded sleeve M33 x 1.5
- Mounting hole size ø35 mm

Flow rate 11 l/min (3 bar)  
Acoustic group I

<p>Z.535.263.000 LED Z.535.263.700 <del>Z.536.254.000</del> <del>LED</del> <del>Z.536.254.700</del> Z.636.165 M18.5x1</p>	<p>A 225 Z.535.300.000 Z.535.300.700</p>	<p>12 Nm + 1 Nm Z.534.836 Z.635.385 SW 32 Z.536.578.000 Z.536.052.000</p>
<p>CH/EU:</p> <p>M16x1 Z.535.331 M14x1 Z.536.228 M12x1</p>	<p>Z.601.981 Z.536.007</p>	<p>Z.536.578.700 12 Nm + 1 Nm Z.635.385 SW 32 Z.534.836 12 Nm + 1 Nm Z.536.008.700</p>
<p>M18.5x1 Z.634.729</p> <p>CACHE® NEOPERL®</p>		<p>Z.534.836 12 Nm + 1 Nm Z.635.385 SW 32</p>
<p>Z.638.943 Z.532.241 Z.538.336 M16x1 M14x1 Z.535.773 Z.536.228 M12x1</p>		

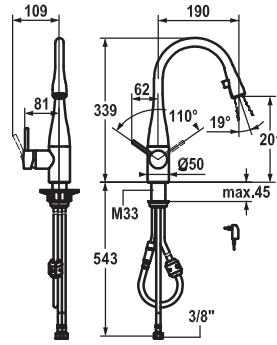

Art.-No.	KWC-No.	FUN
<b>121618</b>	<b>10.121.102.000FL</b>	115.0307.894
all chrome, A 190, flexible connection hoses, mains receiver		
<b>121616</b>	<b>10.121.102.700FL</b>	115.0307.869
stainless steel, A 190, flexible connection hoses, mains receiver		


**Lever mixer • Kitchen • with LEDShine**

Lever mixer

- Lever installation possible on the right or left side
- TouchProtect - anti-scald protection thanks to the "double skin" principle
- Pull-out aerator covered
  - Neoperl® Caché®
  - integrated ON/OFF push-button with automatic shut-off after 45 minutes
  - up to 600 mm pull-out length
  - hose surface to fit faucet surface
- Hose guide, swivelling 320°
- EasyLock - a pull-out spray that easily slides back into place
- KWC cartridge M 35
  - with ceramic discs
  - flow rate and temperature continuously variable
- Flexible connection hoses 3/8"
- Fastening by means of threaded sleeve M33 x 1.5
- Mounting hole size ø35 mm
- Scope of delivery:
  - Mains receiver 100-240 V / operating voltage 6.75 V / cable length 1100 mm

Flow rate 10 l/min (3 bar)  
Acoustic group I

<p>Z.535.263.000 LED Z.535.263.700</p> <p><del>Z.536.254.000</del> <del>LED Z.536.254.700</del></p> <p>Z.636.165 M18.5x1</p>	<p>A 190 Z.535.583.000 Z.535.583.700</p>	<p>Z.536.578.000</p> <p>12 Nm + 1 Nm Z.534.836</p> <p>Z.635.385 SW 32</p> <p>Z.536.052.000</p>	<p>GB: AUS: USA/JPN: Z.537.429</p> <p>L = 1100 mm / 43 5/16"</p> <p>CH/EU: Z.635.582</p>
<p>CH/EU:</p> <p>M16x1 Z.535.331 M14x1</p>	<p>Z.601.981 Z.536.007</p>	<p>Z.536.578.700</p> <p>Z.635.385 SW 32</p> <p>Z.534.836 12 Nm + 1 Nm</p> <p>Z.536.008.700</p>	<p>Z.638.943 Z.532.241 Z.538.336</p>
<p>M18.5x1 Z.634.729</p> <p>CACHE® NEOPERL®</p>	<p>Z.534.836 12 Nm + 1 Nm</p> <p>Z.635.385 SW 32</p>	<p>Z.535.773</p> <p>M16x1 M14x1</p>	

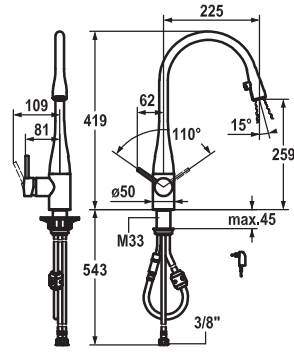

Art.-No.	KWC-No.	FUN
<b>121240</b>	<b>10.121.103.000FL</b>	115.0308.180
all chrome, A 225, flexible connection hoses, mains receiver		
<b>121325</b>	<b>10.121.103.700FL</b>	115.0308.182
stainless steel, A 225, flexible connection hoses, mains receiver		


### Lever mixer • Kitchen • with LEDShine


Lever mixer

- Lever installation possible on the right or left side
- TouchProtect - anti-scald protection thanks to the "double skin" principle
- Pull-out aerator covered
  - Neoperl® Caché®
  - integrated ON/OFF push-button with automatic shut-off after 45 minutes
  - up to 600 mm pull-out length
  - hose surface to fit faucet surface
- Hose guide, swivelling 320°
- EasyLock - a pull-out spray that easily slides back into place
- OptimalSpace - ample space for washing or working
- KWC cartridge M 35
  - with ceramic discs
  - flow rate and temperature continuously variable
- Flexible connection hoses 3/8"
- Fastening by means of threaded sleeve M33 x 1.5
- Mounting hole size ø35 mm
- Scope of delivery:
  - Mains receiver 100-240 V / operating voltage 6.75 V / cable length 1100 mm

Flow rate 10 l/min (3 bar)

Acoustic group I

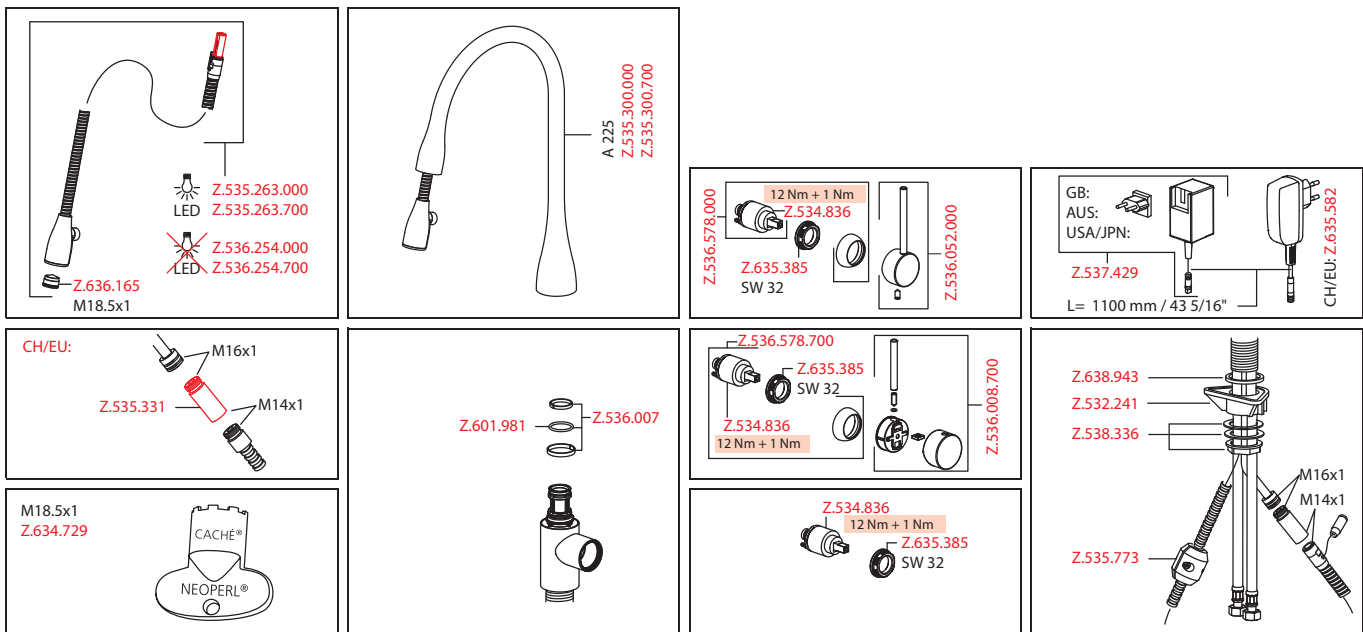

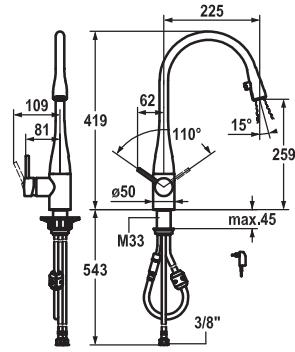

Art.-No.	KWC-No.	FUN
122168	10.121.103.150FL	115.0308.203
glacier white, A 225, flexible connection hoses, mains receiver		


**Lever mixer • Kitchen • with LEDShine**

Lever mixer

- Lever installation possible on the right or left side
- TouchProtect - anti-scald protection thanks to the “double skin” principle
- Pull-out aerator covered
  - Neoperl® Caché®
  - integrated ON/OFF push-button with automatic shut-off after 45 minutes
  - up to 600 mm pull-out length
- Hose guide, swivelling 320°
- EasyLock - a pull-out spray that easily slides back into place
- OptimalSpace - ample space for washing or working
- KWC cartridge M 35
  - with ceramic discs
  - flow rate and temperature continuously variable
- Flexible connection hoses 3/8"
- Fastening by means of threaded sleeve M33 x 1.5
- Mounting hole size ø35 mm
- Scope of delivery:
  - Mains receiver 100-240 V / operating voltage 6.75 V / cable length 1100 mm

Flow rate 10 l/min (3 bar)  
Acoustic group I

<p>Z.535.263.000 LED</p> <p>Z.636.165 M18.5x1</p>	<p>A 225 Z.535.300.150 Z.535.300.151</p>	<p>GB:    AUS:     USA/JPN:     Z.537.429</p> <p>L = 1100 mm / 43 5/16"</p> <p>CH/EU: Z.635.582</p>
<p>CH/EU:</p> <p>M16x1 Z.535.331 M14x1</p>	<p>Z.601.981 Z.536.007</p>	<p>Z.536.578.150 Z.536.578.151 Z.634.612.150 Z.634.612.151 Z.534.836 12 Nm + 1 Nm</p> <p>Z.536.052.150 Z.536.052.151</p>
<p>M18.5x1 Z.634.729</p> <p>CACHE® NEOPERL®</p>	<p>Z.534.836 12 Nm + 1 Nm Z.635.385 SW 32</p>	<p>Z.638.943 Z.532.241 Z.538.336 Z.535.773</p> <p>M16x1 M14x1</p>

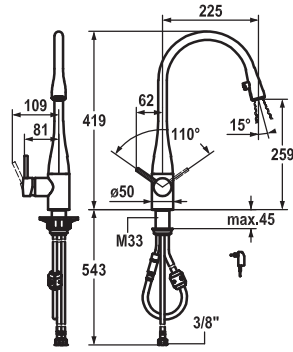

Art.-No.	KWC-No.	FUN
122169	10.121.103.151FL	115.0308.204

black chrome-plated, A 225, flexible connection hoses, mains receiver


**Lever mixer • Kitchen • with LEDShine**

Lever mixer

- Lever installation possible on the right or left side
- TouchProtect - anti-scald protection thanks to the "double skin" principle
- Pull-out aerator covered
  - Neoperl® Caché®
  - integrated ON/OFF push-button with automatic shut-off after 45 minutes
  - up to 600 mm pull-out length
- Hose guide, swivelling 320°
- EasyLock - a pull-out spray that easily slides back into place
- OptimalSpace - ample space for washing or working
- KWC cartridge M 35
  - with ceramic discs
  - flow rate and temperature continuously variable
- Flexible connection hoses 3/8"
- Fastening by means of threaded sleeve M33 x 1.5
- Mounting hole size ø35 mm
- Scope of delivery:
  - Mains receiver 100-240 V / operating voltage 6.75 V / cable length 1100 mm

Flow rate 10 l/min (3 bar)  
Acoustic group I


<p>Z.636.165 M18.5x1</p> <p>Z.535.263.000 LED</p>	<p>A 225 Z.535.300.000 Z.535.300.150 Z.535.300.700 Z.535.300.151</p>		<p>CH/EU: Z.635.582</p> <p>L= 1100 mm / 31 1/2"</p>
<p>CH/EU:</p> <p>M16x1 M14x1 Z.535.331</p>	<p>Z.601.981 Z.536.007</p>	<p>Z.536.578.150 Z.536.578.151 Z.634.612.150 Z.634.612.151 Z.534.836 12 Nm + 1 Nm</p> <p>Z.536.052.150 Z.536.052.151</p>	<p>Z.638.943 Z.532.241 Z.538.336</p> <p>M16x1 M14x1</p>
<p>M18.5x1 Z.634.729</p> <p>CACHE® NEOPERL®</p>		<p>Z.534.836 12 Nm + 1 Nm Z.635.385 SW 32</p>	<p>Z.535.773</p>

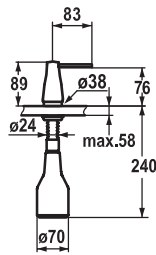

Art.-No.	KWC-No.	FUN
<b>536063</b>	<b>Z.536.063.000</b>	119.0307.870
all chrome		
<b>536064</b>	<b>Z.536.063.700</b>	119.0307.901
stainless steel		

**Soap dispenser KWC EVE**


- Easily refillable from top without disassembly
- Mounting hole size  $\varnothing 26$  mm
- Scope of delivery:
  - Pump
  - Soap container, filling capacity 350 ml Z.635.713
- To be ordered separately (optional or if necessary):
  - Escutcheon Z.536.291.000 or Z.536.292.700

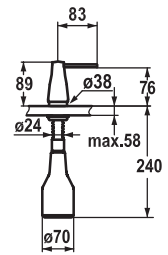

Art.-No.	KWC-No.	FUN
<b>536263</b>	<b>Z.536.063.151</b>	119.0308.349
black chrome-plated		

**Soap dispenser KWC EVE**


- Easily refillable from top without disassembly
- Mounting hole size  $\varnothing 26$  mm
- Scope of delivery:
  - Pump
  - Soap container, filling capacity 350 ml Z.635.713
- To be ordered separately (optional or if necessary):
  - Escutcheon Z.536.291.000 or Z.536.292.700

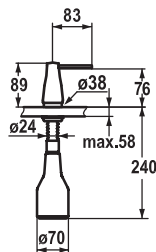

Art.-No.	KWC-No.	FUN
<b>536262</b>	<b>Z.536.063.150</b>	119.0308.348
glacier white		

**Soap dispenser KWC EVE**

- Easily refillable from top without disassembly
- Mounting hole size  $\varnothing 26$  mm
- Scope of delivery:
  - Pump
  - Soap container, filling capacity 350 ml Z.635.713
- To be ordered separately (optional or if necessary):
  - Escutcheon Z.536.291.000 or Z.536.292.700

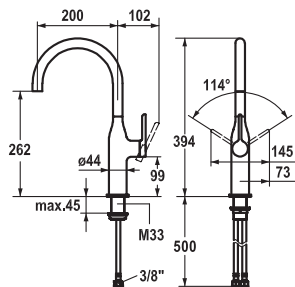


Art.-No.	KWC-No.	FUN
<b>122286</b>	<b>10.261.012.000FL</b>	115.0308.212
all chrome, A 200, flexible connection hoses		

**Lever mixer • Kitchen**

Lever mixer

- Lever installation possible on the right or left side
- Swivel spout 160°
  - Neoperl® Caché®
- OptimalSpace - ample space for washing or working
- KWC cartridge S 25
  - with ceramic discs
  - flow rate and temperature continuously variable
- Flexible connection hoses 3/8"
- Fastening by means of threaded sleeve M33 x 1.5
- Mounting hole size ø35 mm

Flow rate 12 l/min (3 bar)  
Acoustic group I

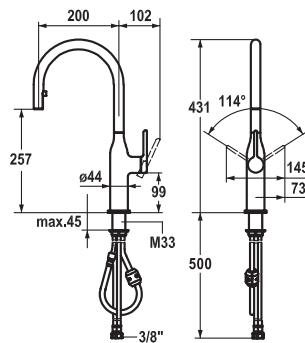Art.-No.	KWC-No.	FUN
<b>122284</b>	<b>10.261.102.000FL</b>	115.0308.211
all chrome, A 200, flexible connection hoses		


**Lever mixer • Kitchen**

Lever mixer

- Lever installation possible on the right or left side
- TouchProtect - anti-scald protection thanks to the "double skin" principle
- Pull-out aerator covered
  - Neoperl® Caché®
  - up to 500 mm pull-out length
  - hose surface to fit faucet surface
- Hose guide, swivelling 360°
- EasyLock - a pull-out spray that easily slides back into place
- OptimalSpace - ample space for washing or working
- KWC cartridge S 25
  - with ceramic discs
  - flow rate and temperature continuously variable
- Flexible connection hoses 3/8"
- Fastening by means of threaded sleeve M33 x 1.5
- Mounting hole size ø35 mm

Flow rate 10 l/min (3 bar)  
Acoustic group I

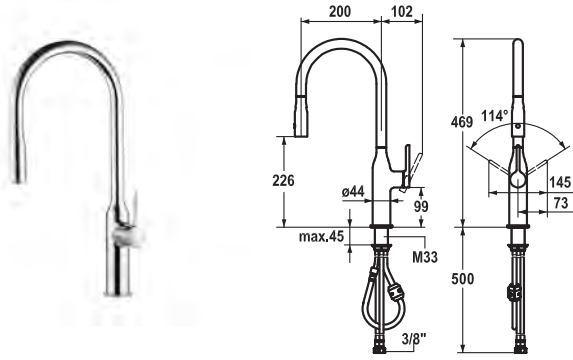



Art.-No.	KWC-No.	FUN
<b>122282</b>	<b>10.261.002.000FL</b>	115.0308.210
all chrome, A 200, flexible connection hoses		

**Lever mixer • Kitchen**

Lever mixer

- Lever installation possible on the right or left side
- TouchProtect - anti-scald protection thanks to the "double skin" principle
- Pull-out spray 360° turn
  - SprayClean - easy to clean and actively prevents limescale buildup
  - Neoperl® Caché®
  - PowerClean - needle spray mode, with automatic diverter reset
  - up to 500 mm pull-out length
  - hose surface to fit faucet surface
- Hose guide, swivelling 360°
- EasyLock - a pull-out spray that easily slides back into place
- OptimalSpace - ample space for washing or working
- KWC cartridge S 25
  - with ceramic discs
  - flow rate and temperature continuously variable
- Flexible connection hoses 3/8"
- Fastening by means of threaded sleeve M33 x 1.5
- Mounting hole size ø35 mm

Flow rate normal spray 7 l/min (3 bar)  
 Flow rate needle spray 6 l/min (3 bar)  
 Acoustic group I

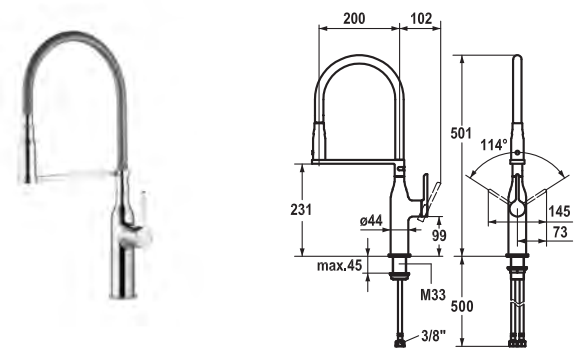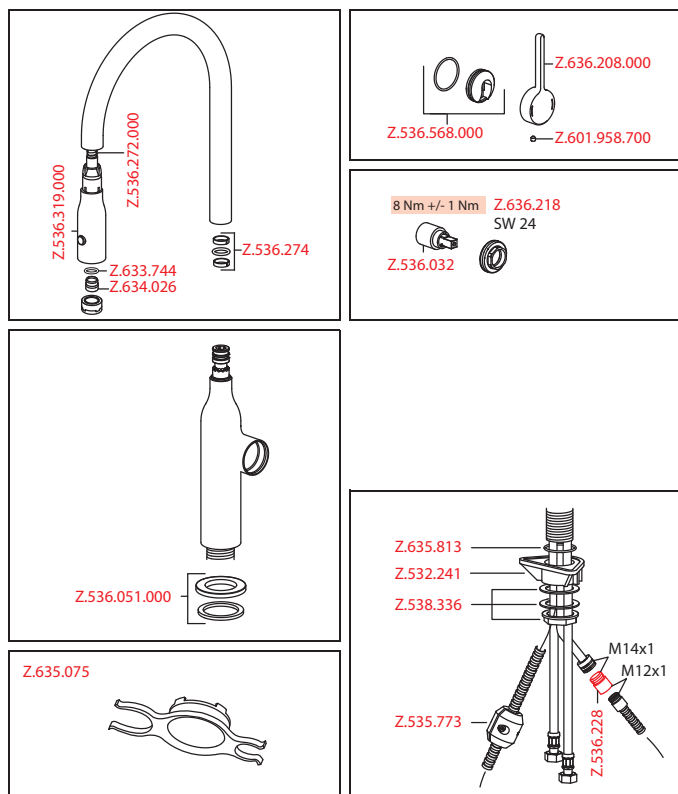


Art.-No.	KWC-No.	FUN
<b>122280</b>	<b>10.261.432.000FL</b>	115.0308.209
all chrome, A 200, flexible connection hoses		


**Lever mixer • Kitchen**

Lever mixer

- HighFlex patented spring hose technology
- Lever installation possible on the right or left side
- TouchProtect - anti-scald protection thanks to the "double skin" principle
- Spray 360° turn
  - SprayClean - easy to clean and actively prevents limescale buildup
  - Neoperl® Caché®
  - PowerClean - needle spray mode, with automatic diverter reset
- EasyLock - a pull-out spray that easily slides back into place
- Swivel spout 360°
- OptimalSpace - ample space for washing or working
- KWC cartridge S 25
  - with ceramic discs
  - flow rate and temperature continuously variable
- Flexible connection hoses 3/8"
- Fastening by means of threaded sleeve M33 x 1.5
- Mounting hole size ø35 mm

Flow rate normal spray 8 l/min (3 bar)  
 Flow rate needle spray 6 l/min (3 bar)  
 Acoustic group I

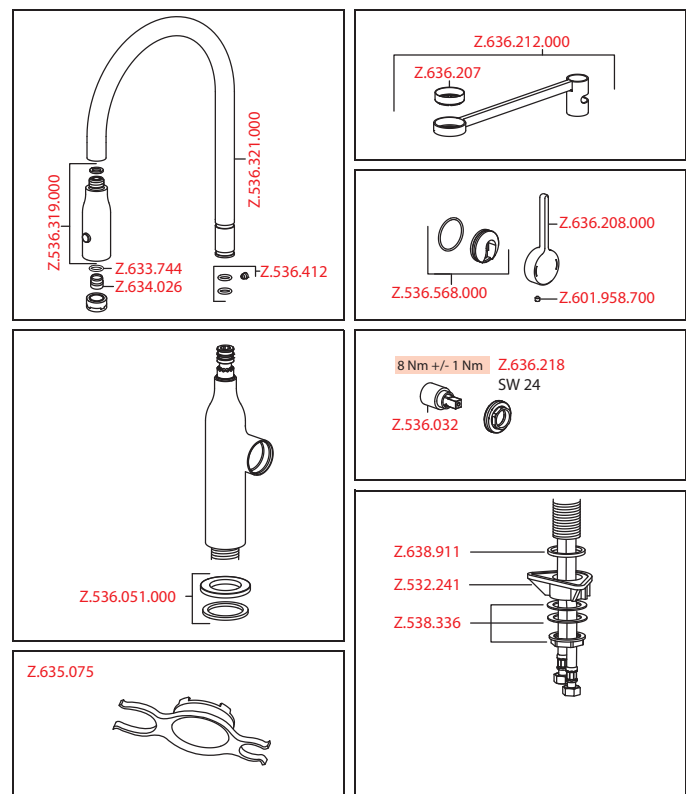

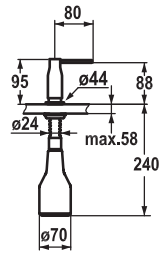


Art.-No.	KWC-No.	FUN
<b>536332</b>	<b>Z.536.332.000</b>	119.0308.350
all chrome		


### Soap dispensers

Soap dispenser KWC SIN

- Easily refillable from top without disassembly
- Mounting hole size  $\varnothing 26$  mm
- Scope of delivery:
  - Pump
  - Soap container, filling capacity 350 ml Z.635.713

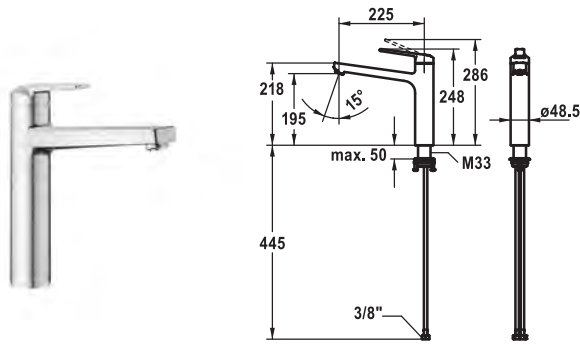

Art.-No.	KWC-No.	FUN
<b>124933</b>	<b>10.701.023.700FL</b>	115.0634.708
stainless steel, A 225, flexible connection hoses		

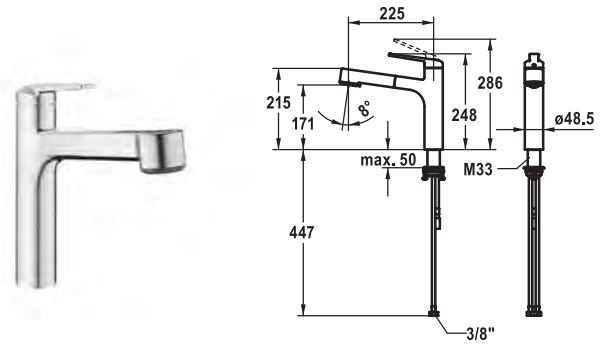


Art.-No.	KWC-No.	FUN
<b>124934</b>	<b>10.701.033.700FL</b>	115.0634.709
stainless steel, A 225, flexible connection hoses		

**Lever mixer • Kitchen**

Lever mixer

- Swivel spout 150°
  - Neoperl® Cascade® SLC
- OptimalSpace - ample space for washing or working
- KWC cartridge M 35 S
  - with ceramic discs
  - flow rate and temperature continuously variable
  - temperature limitation
- Flexible connection hoses 3/8"
- QuickInstallation - Fastening via threaded connection with locking screws
- Mounting hole size ø35 mm

Flow rate 12 l/min (3 bar)  
Acoustic group I

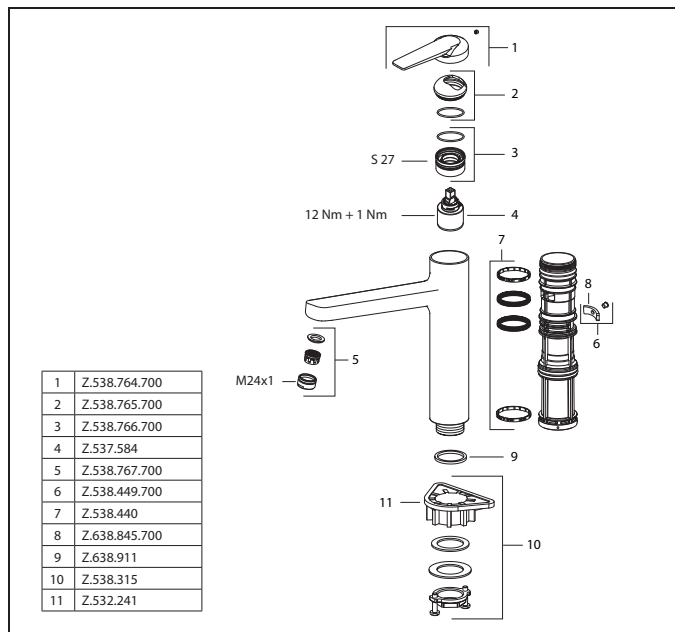



**Lever mixer • Kitchen**

Lever mixer

- TouchProtect - anti-scald protection thanks to the "double skin" principle
- Intrinsically safe against backflow
- Pull-out spray
  - SprayClean - easy to clean and actively prevents limescale buildup
  - up to 600 mm pull-out length
  - TripleClean - Normal, soft, and power stream modes
  - hose surface to fit faucet surface
  - QuickConnect - Simple hose connection system
- Hose guide, swivelling 120°
- EasyLock - a pull-out spray that easily slides back into place
- OptimalSpace - ample space for washing or working
- KWC cartridge M 35 S
  - with ceramic discs
  - flow rate and temperature continuously variable
  - temperature limitation
- Flexible connection hoses 3/8"
- QuickInstallation - Fastening via threaded connection with locking screws
- Mounting hole size ø35 mm

Flow rate normal spray 8 l/min (3 bar)  
Flow rate needle spray 9 l/min (3 bar)  
Acoustic group I

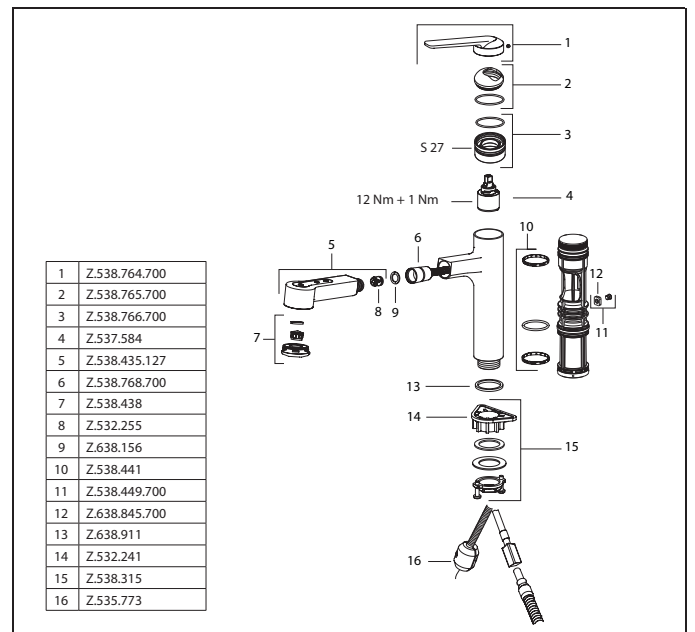

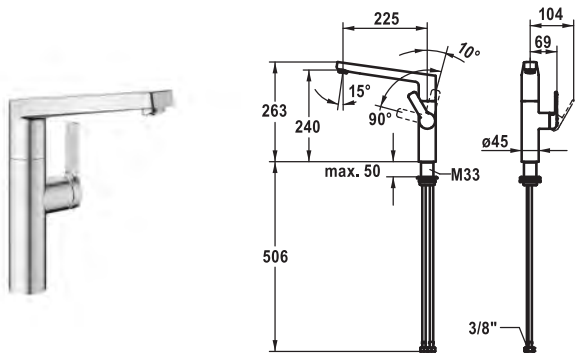



Art.-No.	KWC-No.	FUN
<b>124936</b>	<b>10.701.013.700FL</b>	115.0634.710
stainless steel, A 225, flexible connection hoses		

**Lever mixer • Kitchen**

Lever mixer

- Lever installation only possible on the right side
  - Child safety: cold water flow in lever position towards the front
- gap between wall and centre of mounting hole min. 26 mm
- SwivelStop - swivel spout 360°, limitable to 150°
  - Neoperl® Cascade® SLC
- OptimalSpace - ample space for washing or working
- KWC cartridge M 35 S
  - with ceramic discs
  - flow rate and temperature continuously variable
  - temperature limitation
- Flexible connection hoses 3/8"
- QuickInstallation - Fastening via threaded connection with locking screws
- Mounting hole size ø35 mm

Flow rate 11 l/min (3 bar)  
Acoustic group I

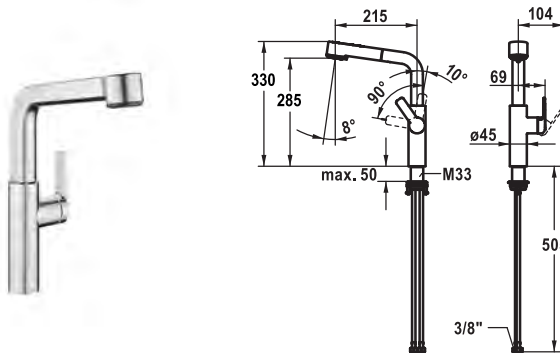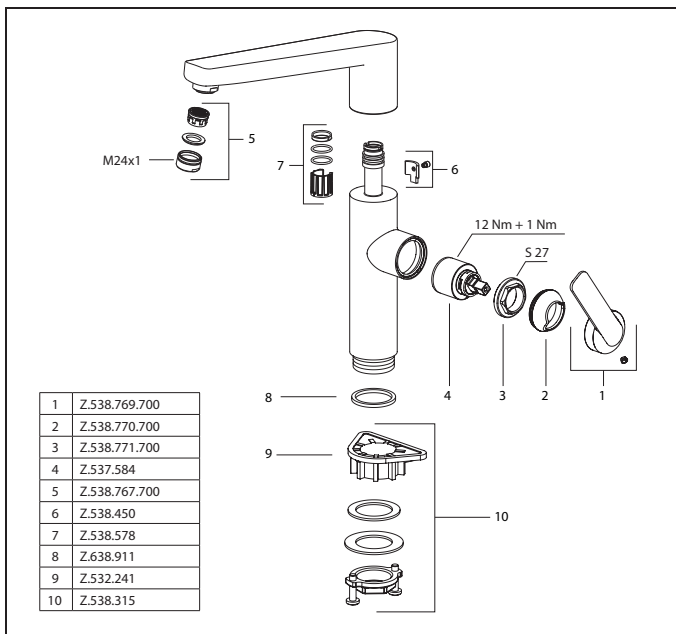


Art.-No.	KWC-No.	FUN
<b>124937</b>	<b>10.701.003.700FL</b>	115.0634.761
stainless steel, A 215, flexible connection hoses		


**Lever mixer • Kitchen**

Lever mixer


- Lever installation only possible on the right side
  - Child safety: cold water flow in lever position towards the front
- gap between wall and centre of mounting hole min. 26 mm
- TouchProtect - anti-scald protection thanks to the "double skin" principle
- Intrinsically safe against backflow
- Pull-out spray
  - SprayClean - easy to clean and actively prevents limescale buildup
  - up to 600 mm pull-out length
  - TripleClean - Normal, soft, and power stream modes
  - hose surface to fit faucet surface
  - QuickConnect - Simple hose connection system
- Hose guide, swivelling 150°
- EasyLock - a pull-out spray that easily slides back into place
- OptimalSpace - ample space for washing or working
- KWC cartridge M 35 S
  - with ceramic discs
  - flow rate and temperature continuously variable
  - temperature limitation
- Flexible connection hoses 3/8"
- QuickInstallation - Fastening via threaded connection with locking screws
- Mounting hole size ø35 mm

Flow rate normal spray 8 l/min (3 bar)  
Flow rate needle spray 8 l/min (3 bar)  
Acoustic group I

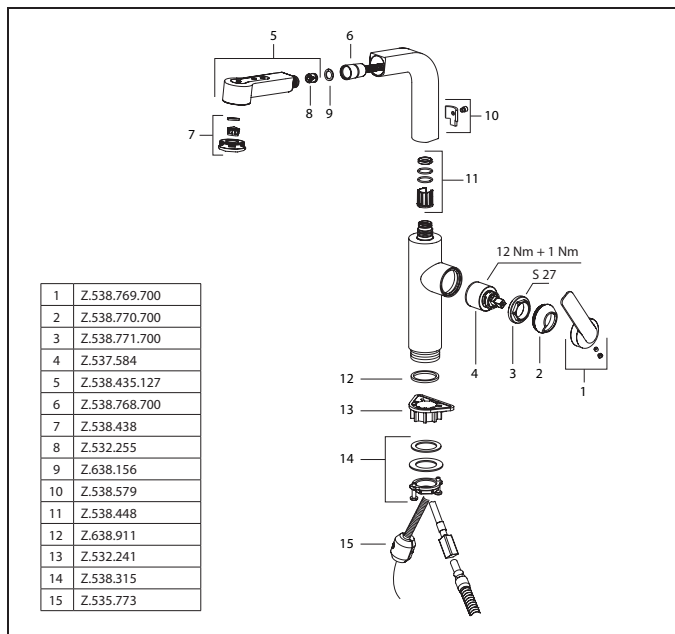

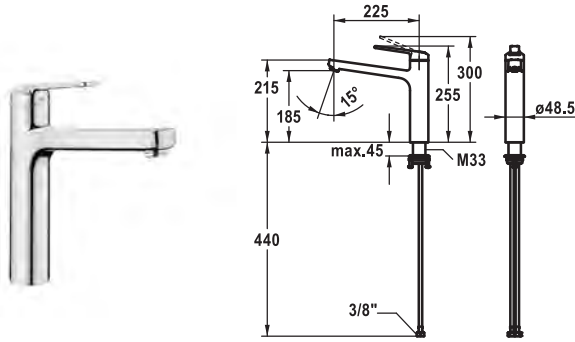

Art.-No.	KWC-No.	FUN
<b>124918</b>	<b>10.661.023.000FL</b>	115.0604.247
all chrome, A 225, flexible connection hoses		

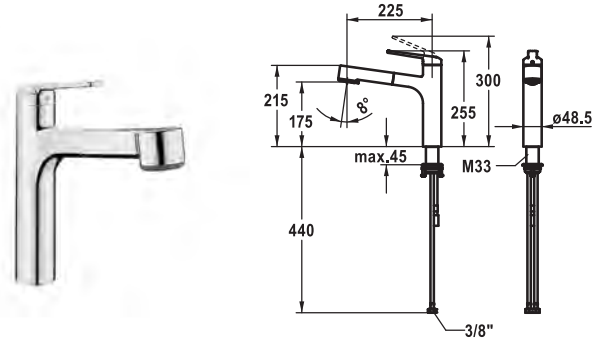


Art.-No.	KWC-No.	FUN
<b>124922</b>	<b>10.661.033.000FL</b>	115.0604.250
all chrome, A 225, flexible connection hoses		

**Lever mixer • Kitchen**

Lever mixer

- Swivel spout 150°
  - Neoperl® Cascade® SLC
- OptimalSpace - ample space for washing or working
- KWC cartridge M 35 S
  - with ceramic discs
  - flow rate and temperature continuously variable
  - temperature limitation
- Flexible connection hoses 3/8"
- QuickInstallation - Fastening via threaded connection with locking screws
- Mounting hole size ø35 mm

Flow rate 12 l/min (3 bar)  
Acoustic group I

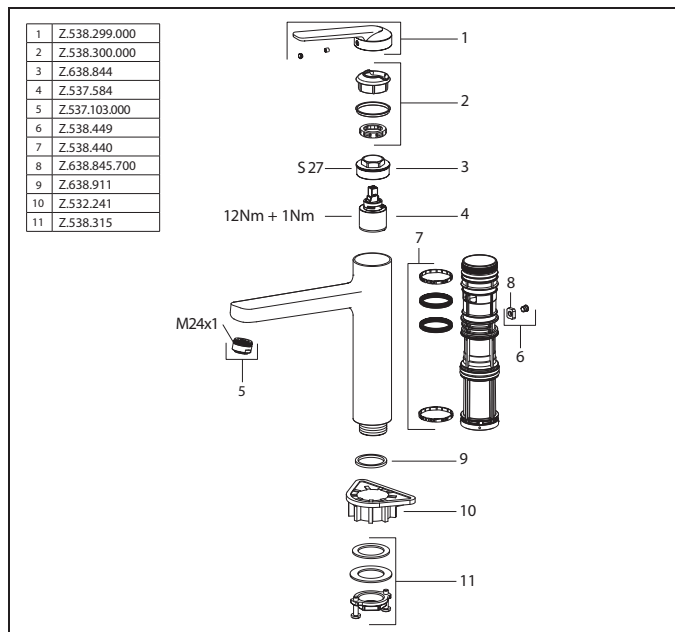



**Lever mixer • Kitchen**

Lever mixer


- TouchProtect - anti-scald protection thanks to the "double skin" principle
- Intrinsically safe against backflow
- Pull-out spray
  - SprayClean - easy to clean and actively prevents limescale buildup
  - up to 600 mm pull-out length
  - TripleClean - Normal, soft, and power stream modes
  - hose surface to fit faucet surface
  - QuickConnect - Simple hose connection system
- Hose guide, swivelling 120°
- EasyLock - a pull-out spray that easily slides back into place
- OptimalSpace - ample space for washing or working
- KWC cartridge M 35 S
  - with ceramic discs
  - flow rate and temperature continuously variable
  - temperature limitation
- Flexible connection hoses 3/8"
- QuickInstallation - Fastening via threaded connection with locking screws
- Mounting hole size ø35 mm

Flow rate normal spray 8 l/min (3 bar)  
Flow rate needle spray 9 l/min (3 bar)  
Acoustic group I

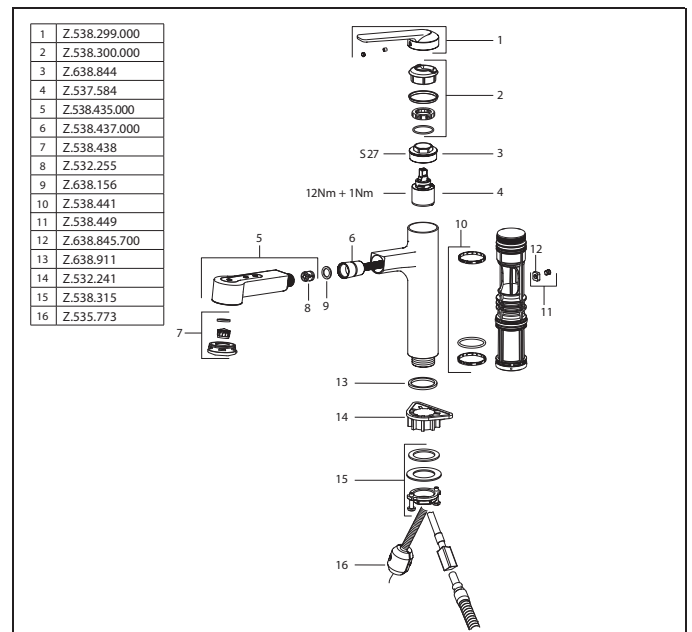

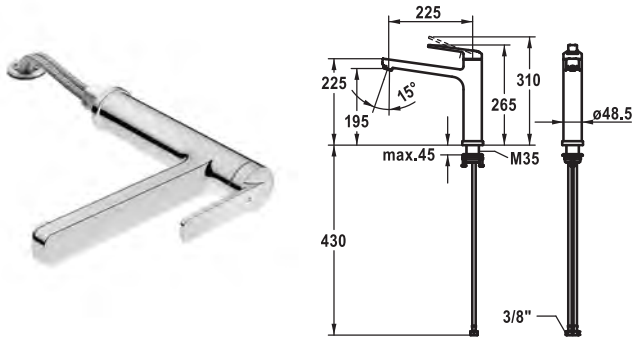

Art.-No.	KWC-No.	FUN
<b>124920</b>	<b>10.661.043.000FL</b>	115.0604.249
all chrome, A 225, flexible connection hoses		

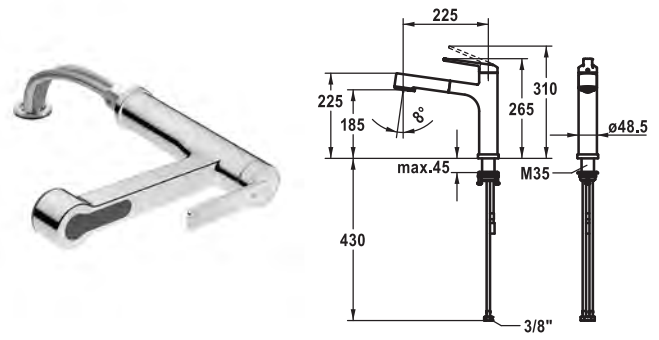


Art.-No.	KWC-No.	FUN
<b>124923</b>	<b>10.661.053.000FL</b>	115.0604.274
all chrome, A 225, flexible connection hoses		

### Lever mixer • Kitchen • detachable

Lever mixer

- Detachable for installation below windows - detached 55 mm
- Swivel spout 150°
  - Neoperl® Cascade® SLC
- OptimalSpace - ample space for washing or working
- KWC cartridge M 35 S
  - with ceramic discs
  - flow rate and temperature continuously variable
  - temperature limitation
- Flexible connection hoses 3/8"
- Fastening by means of threaded sleeve M35 x 1.5 (preassembled socket)
- Mounting hole size  $\varnothing 35 - 37$  mm

Flow rate 12 l/min (3 bar)  
Acoustic group I

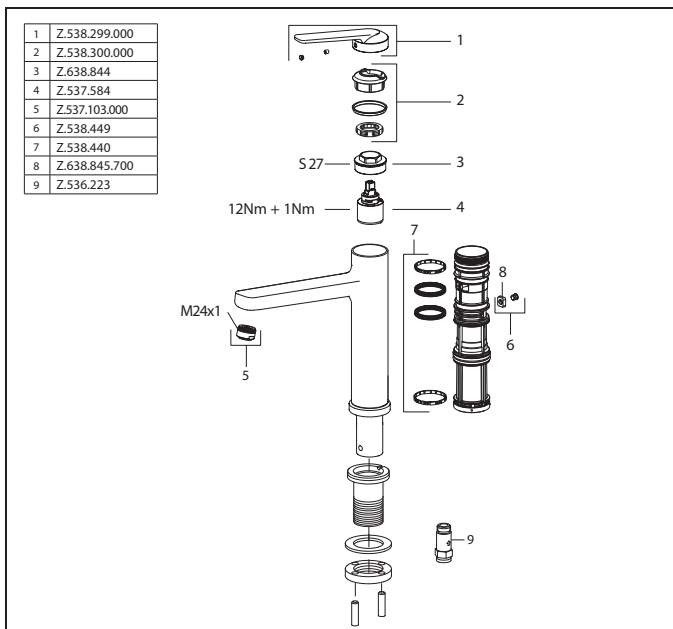



### Lever mixer • Kitchen • detachable

Lever mixer


- Detachable for installation below windows - detached 55 mm
- TouchProtect - anti-scald protection thanks to the "double skin" principle
- Intrinsically safe against backflow
- Pull-out spray
  - SprayClean - easy to clean and actively prevents limescale buildup
  - up to 600 mm pull-out length
  - TripleClean - Normal, soft, and power stream modes
  - hose surface to fit faucet surface
- Hose guide, swivelling 120°
- EasyLock - a pull-out spray that easily slides back into place
- OptimalSpace - ample space for washing or working
- KWC cartridge M 35 S
  - with ceramic discs
  - flow rate and temperature continuously variable
  - temperature limitation
- Flexible connection hoses 3/8"
- Fastening by means of threaded sleeve M35 x 1.5 (preassembled socket)
- Mounting hole size  $\varnothing 35 - 37$  mm

Flow rate normal spray 8 l/min (3 bar)  
Flow rate needle spray 9 l/min (3 bar)  
Acoustic group I

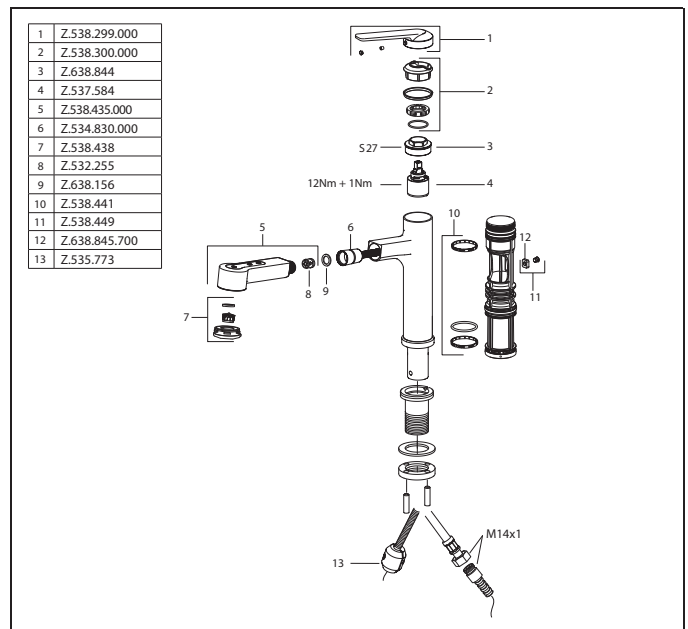

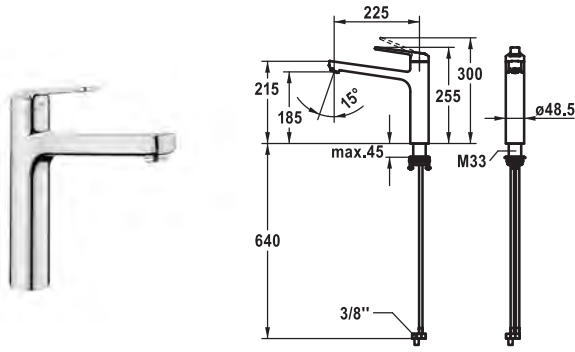

Art.-No.	KWC-No.	FUN
<b>124921</b>	<b>10.665.023.000FL</b>	115.0604.248
all chrome, A 225, flexible connection hoses		

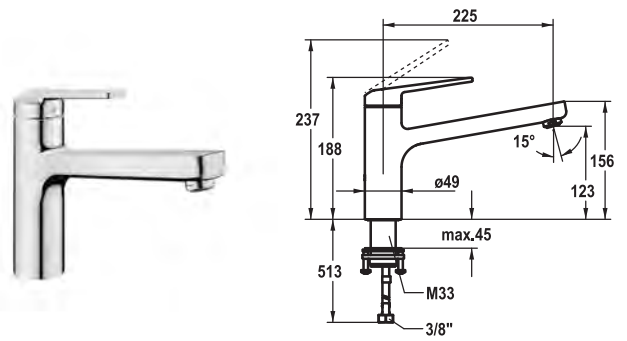

Art.-No.	KWC-No.	FUN
<b>125480</b>	<b>10.661.523.000FL</b>	115.0674.159
all chrome, A 225, flexible connection hoses		

**Lever mixer • Kitchen • Low pressure**

Lever mixer

- Swivel spout 150°
  - Jet regulator
- OptimalSpace - ample space for washing or working
- KWC cartridge M 35 S
  - with ceramic discs
  - flow rate and temperature continuously variable
  - temperature limitation
- Flexible connection hoses 3/8"
- QuickInstallation - Fastening via threaded connection with locking screws
- Mounting hole size  $\varnothing 35$  mm




**Lever mixer • Kitchen**

Lever mixer


- Swivel spout 150°
  - Neoperl® Cascade® SLC
- OptimalSpace - ample space for washing or working
- KWC cartridge M 35 S
  - with ceramic discs
  - flow rate and temperature continuously variable
  - temperature limitation
- Flexible connection hoses 3/8"
- QuickInstallation - Fastening via threaded connection with locking screws
- Mounting hole size  $\varnothing 35$  mm




Flow rate 6 l/min (3 bar)  
Acoustic group I

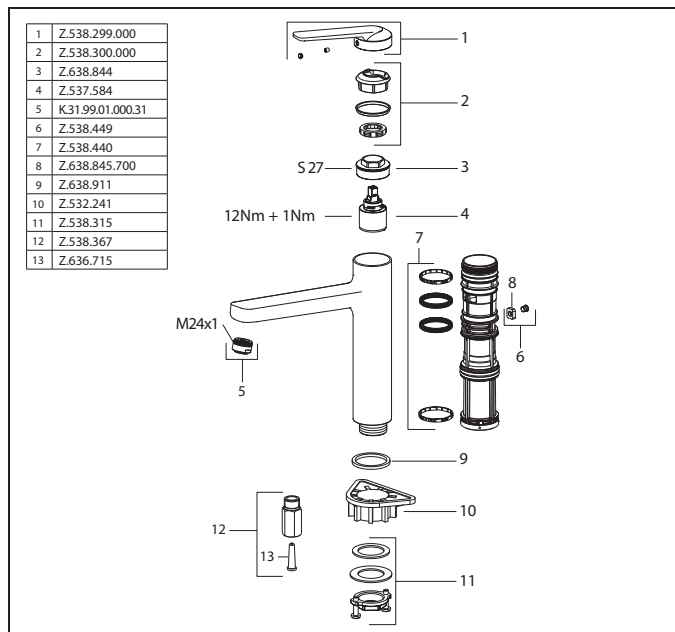


Flow rate 12 l/min (3 bar)  
Acoustic group I

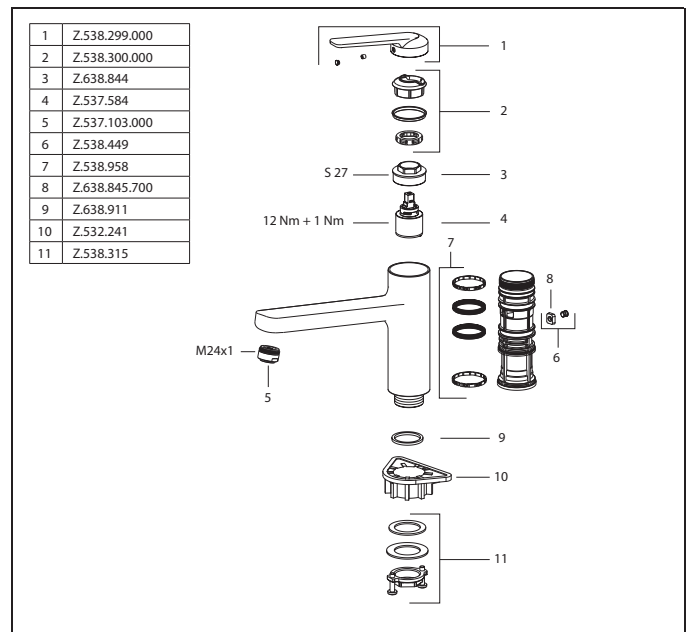

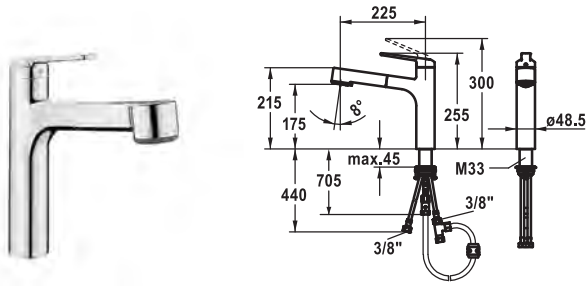

Art.-No.	KWC-No.	FUN
<b>124924</b>	<b>10.665.033.000FL</b>	115.0604.273
all chrome, A 225, flexible connection hoses		

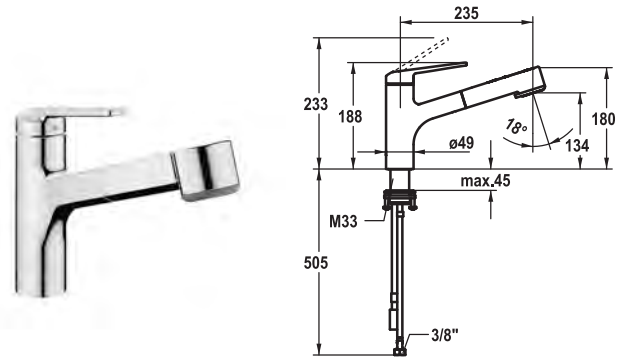

Art.-No.	KWC-No.	FUN
<b>125481</b>	<b>10.661.533.000FL</b>	115.0674.160
all chrome, A 235, flexible connection hoses		


**Lever mixer • Kitchen • Low pressure**



Lever mixer

- TouchProtect - anti-scald protection thanks to the "double skin" principle
- Intrinsically safe against backflow
- Pull-out spray
  - SprayClean - easy to clean and actively prevents limescale buildup
  - up to 600 mm pull-out length
  - TripleClean - Normal, soft, and power stream modes
  - hose surface to fit faucet surface
- Hose guide, swivelling 120°
- EasyLock - a pull-out spray that easily slides back into place
- OptimalSpace - ample space for washing or working
- KWC cartridge M 35 S
  - with ceramic discs
  - flow rate and temperature continuously variable
  - temperature limitation
- Flexible connection hoses 3/8"
- QuickInstallation - Fastening via threaded connection with locking screws
- Mounting hole size ø35 mm

Flow rate normal spray 7 l/min (3 bar)  
 Flow rate needle spray 7 l/min (3 bar)  
 Acoustic group I

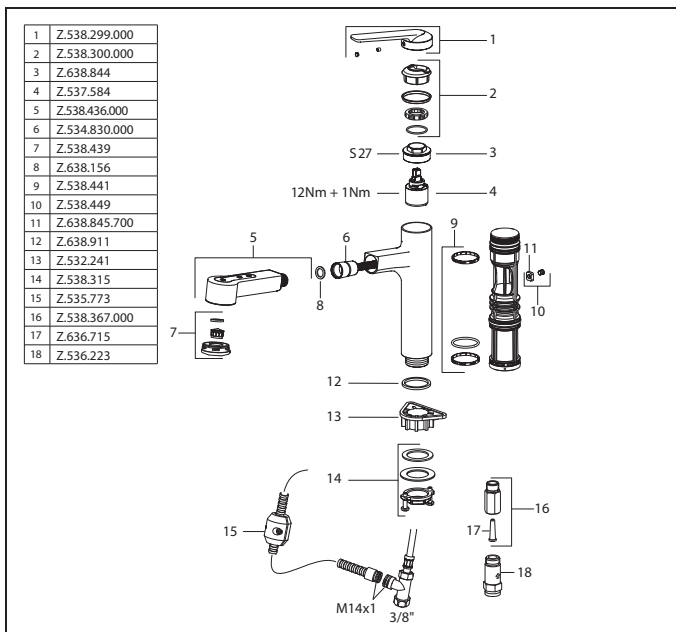


**Lever mixer • Kitchen**




Lever mixer

- TouchProtect - anti-scald protection thanks to the "double skin" principle
- Intrinsically safe against backflow
- Pull-out spray
  - SprayClean - easy to clean and actively prevents limescale buildup
  - up to 600 mm pull-out length
  - TripleClean - Normal, soft, and power stream modes
  - hose surface to fit faucet surface
  - QuickConnect - Simple hose connection system
- Hose guide, swivelling 120°
- EasyLock - a pull-out spray that easily slides back into place
- OptimalSpace - ample space for washing or working
- KWC cartridge M 35 S
  - with ceramic discs
  - flow rate and temperature continuously variable
  - temperature limitation
- Flexible connection hoses 3/8"
- QuickInstallation - Fastening via threaded connection with locking screws
- Mounting hole size ø35 mm


Flow rate normal spray 8 l/min (3 bar)  
 Flow rate needle spray 9 l/min (3 bar)  
 Acoustic group I

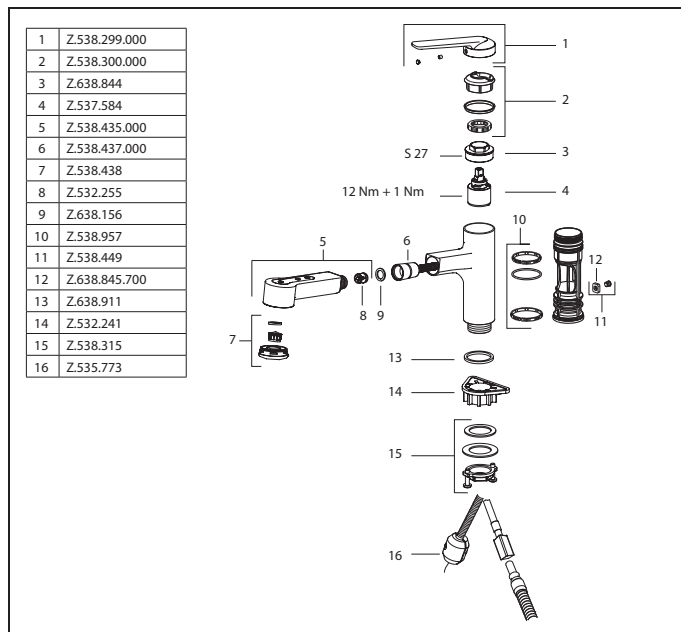



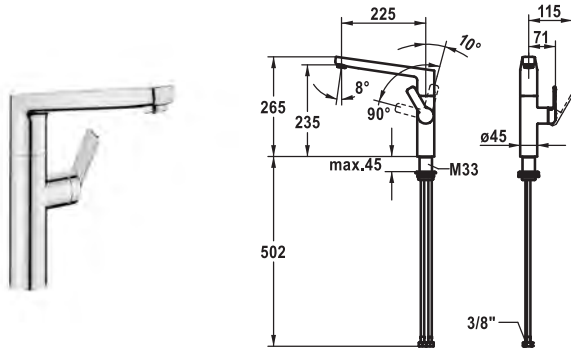

Art.-No.	KWC-No.	FUN
<b>124926</b>	<b>10.661.013.000FL</b>	115.0604.276
all chrome, A 225, flexible connection hoses		

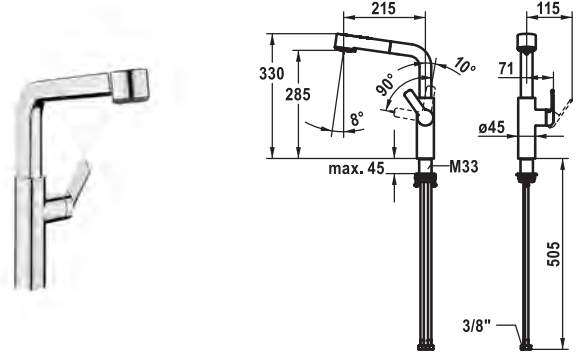

Art.-No.	KWC-No.	FUN
<b>124928</b>	<b>10.661.003.000FL</b>	115.0604.277
all chrome, A 215, flexible connection hoses		

**Lever mixer • Kitchen**

Lever mixer


- Lever installation only possible on the right side
  - Child safety: cold water flow in lever position towards the front
- gap between wall and centre of mounting hole min. 26 mm
- SwivelStop - swivel spout 150°, extensible to 360°
  - Neoperl® Cascade® SLC
- OptimalSpace - ample space for washing or working
- KWC cartridge M 35 S
  - with ceramic discs
  - flow rate and temperature continuously variable
  - temperature limitation
- Flexible connection hoses 3/8"
- QuickInstallation - Fastening via threaded connection with locking screws
- Mounting hole size ø35 mm
- To be ordered separately (optional or if necessary):
  - Swivel range limited to 120°, Z.538.320

**Lever mixer • Kitchen**


Lever mixer


- Lever installation only possible on the right side
  - Child safety: cold water flow in lever position towards the front
- gap between wall and centre of mounting hole min. 26 mm
- TouchProtect - anti-scald protection thanks to the "double skin" principle
- Intrinsically safe against backflow
- Pull-out spray
  - SprayClean - easy to clean and actively prevents limescale buildup
  - up to 600 mm pull-out length
  - TripleClean - Normal, soft, and power stream modes
  - hose surface to fit faucet surface
  - QuickConnect - Simple hose connection system
- Hose guide, swivelling 150°
- EasyLock - a pull-out spray that easily slides back into place
- OptimalSpace - ample space for washing or working
- KWC cartridge M 35 S
  - with ceramic discs
  - flow rate and temperature continuously variable
  - temperature limitation
- Flexible connection hoses 3/8"
- QuickInstallation - Fastening via threaded connection with locking screws
- Mounting hole size ø35 mm
- To be ordered separately (optional or if necessary):
  - Swivel range limited to 120°, Z.538.320

Flow rate 11 l/min (3 bar)  
Acoustic group I

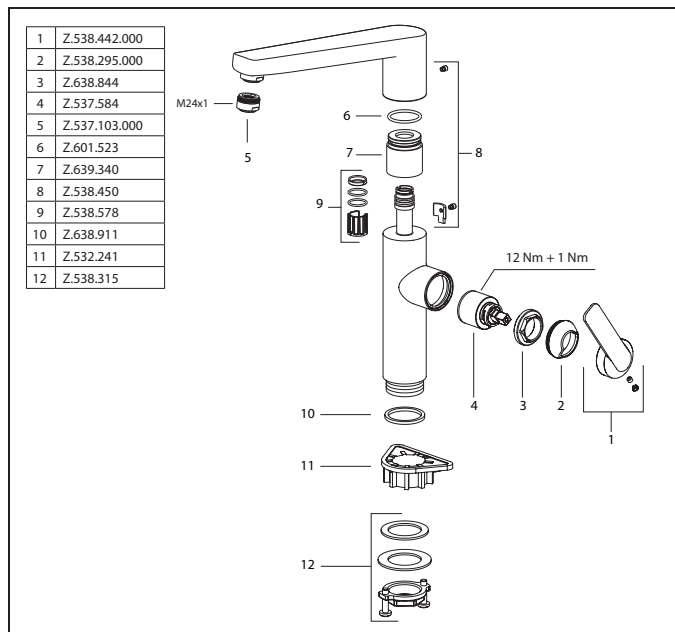

Flow rate normal spray 8 l/min (3 bar)  
Flow rate needle spray 8 l/min (3 bar)  
Acoustic group I

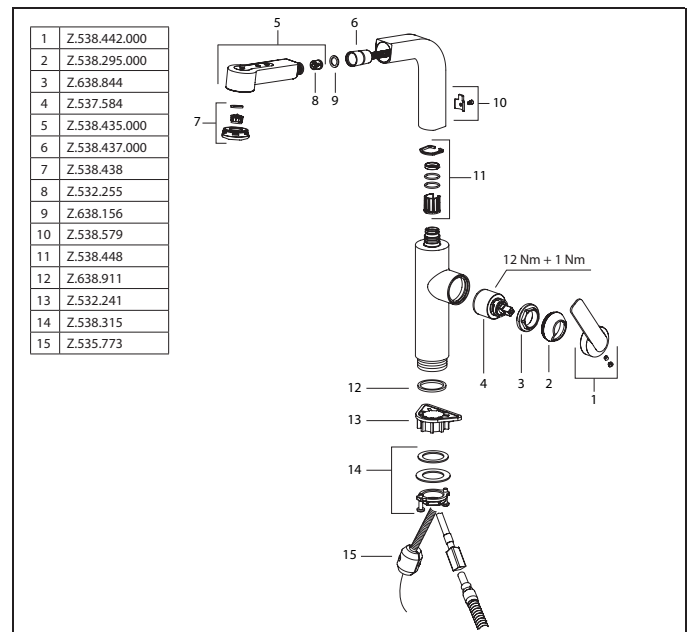

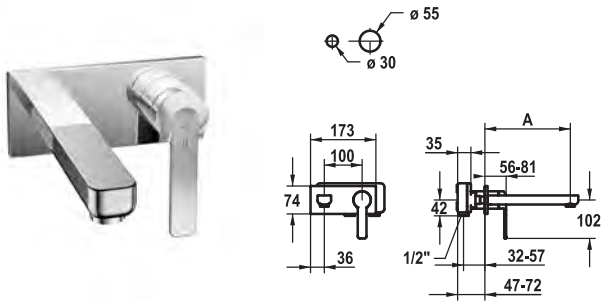


Art.-No.	KWC-No.	FUN
<b>124584</b>	<b>11.662.033.000</b>	615.0583.406
all chrome, A 175, Trim kit		
<b>124585</b>	<b>11.662.034.000</b>	615.0583.407
all chrome, A 225, Trim kit		

### Trim kit • Lever mixer • Basin


Trim kit Lever mixer

- EcoProtect - water-saving device
- Fixed spout
  - Neoperl® Cascade® SLC
- OptimalSpace - ample space for washing or working
- KWC cartridge M 35 H
  - with ceramic discs
  - flow rate and temperature continuously variable
- To be ordered separately:
  - Unit for concealed installation 1/2" 39.001.401.931
- To be ordered separately (optional or if necessary):
  - Extension set 20 mm Z.536.333

Flow rate 5 l/min (3 bar)  
Acoustic group I

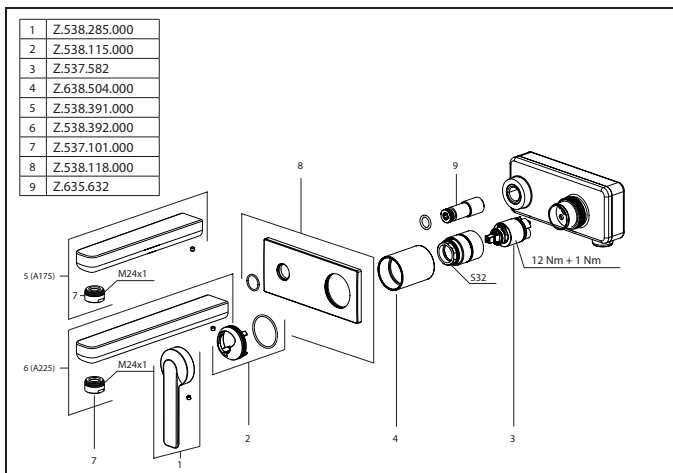

**Z.536.333**  
20mm  
(optional)

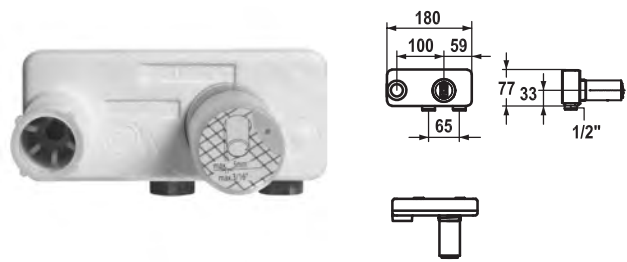



Art.-No.	KWC-No.	FUN
<b>124315</b>	<b>39.001.401.931</b>	112.0521.689
931 roh, Concealed unit		

### Concealed unit

Concealed unit wall two hole

- Connecting thread 1/2"
- To be ordered separately:
  - Installation kit Z.536.828
- Suitable for:
  - KWC DOMO 6.0
  - KWC ELLA
  - KWC BEVO

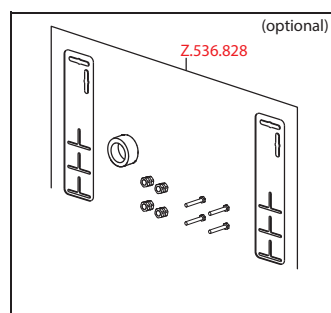




Art.-No.	KWC-No.	FUN
<b>536828</b>	<b>Z.536.828</b>	112.0362.929

Installation kit

- Suitable for:
  - Concealed unit wall two hole

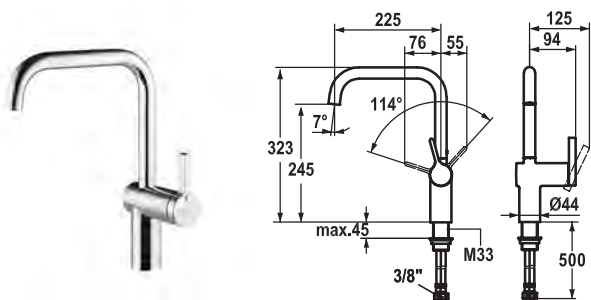



Art.-No.	KWC-No.	FUN
<b>122297</b>	<b>10.231.013.000FL</b>	115.0308.215
all chrome, A 225, flexible connection hoses		

**Lever mixer • Kitchen**

Lever mixer

- Lever installation only possible on the right side
  - Child safety: cold water flow in lever position towards the front
- gap between wall and centre of mounting hole min. 60 mm
- Swivel spout 125°, extensible to 360°
  - Neoperl® Caché®
- OptimalSpace - ample space for washing or working
- KWC cartridge M 35 H
  - with ceramic discs
  - flow rate and temperature continuously variable
- Flexible connection hoses 3/8"
- Fastening by means of threaded sleeve M33 x 1.5
- Mounting hole size ø35 mm

Flow rate 11 l/min (3 bar)  
Acoustic group II

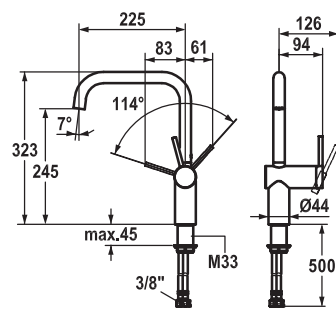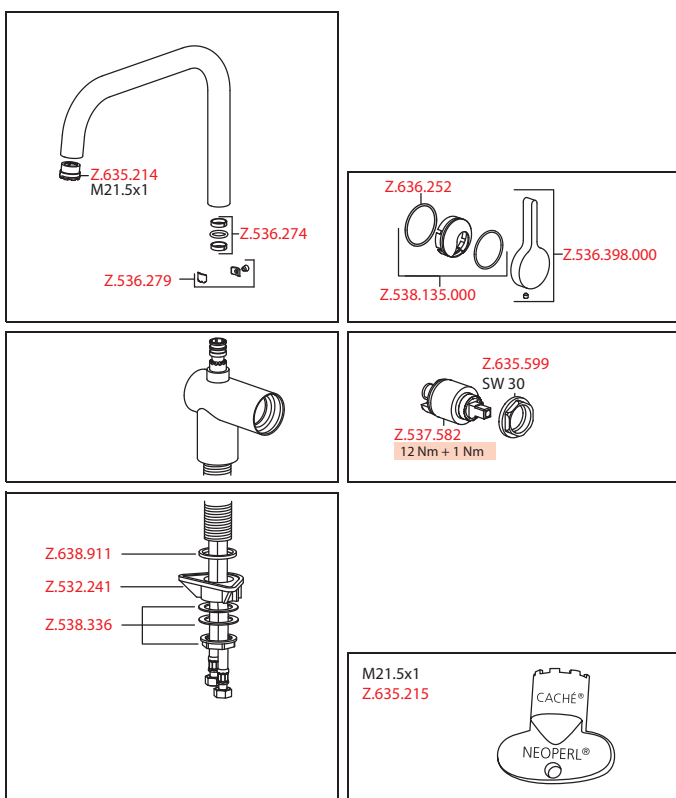


Art.-No.	KWC-No.	FUN
<b>122298</b>	<b>10.231.013.700FL</b>	115.0308.216
stainless steel, A 225, flexible connection hoses		


**Lever mixer • Kitchen**

Lever mixer


- Lever installation only possible on the right side
  - Child safety: cold water flow in lever position towards the front
- gap between wall and centre of mounting hole min. 65 mm
- Swivel spout 125°, extensible to 360°
  - Neoperl® Caché®
- OptimalSpace - ample space for washing or working
- KWC cartridge M 35 H
  - with ceramic discs
  - flow rate and temperature continuously variable
- Flexible connection hoses 3/8"
- Fastening by means of threaded sleeve M33 x 1.5
- Mounting hole size ø35 mm

Flow rate 11 l/min (3 bar)  
Acoustic group II

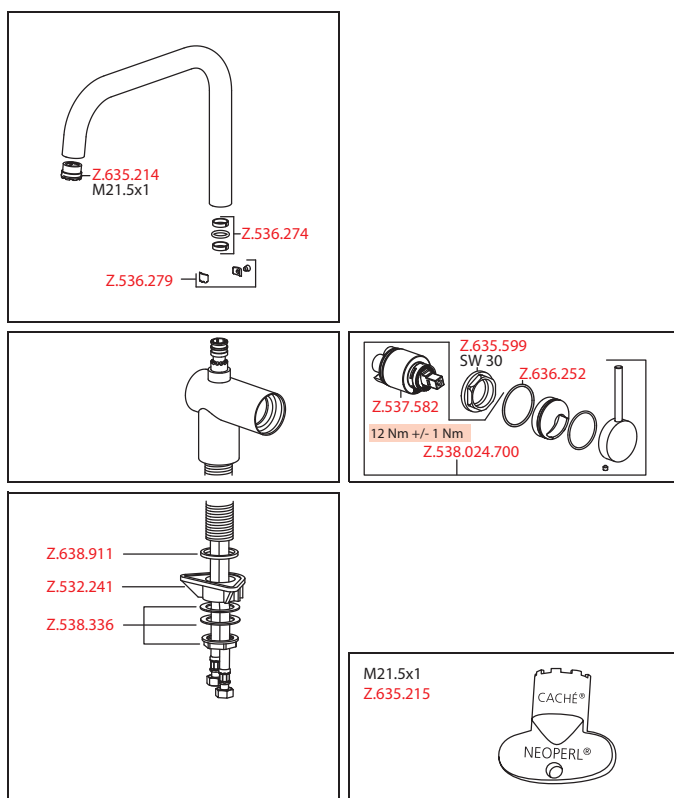

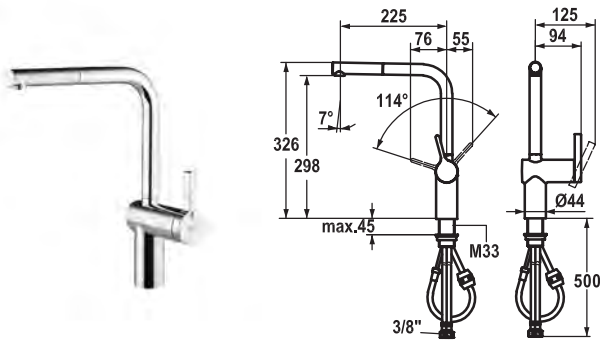

Art.-No.	KWC-No.	FUN
<b>122295</b>	<b>10.231.103.000FL</b>	115.0308.213
all chrome, A 225, flexible connection hoses		

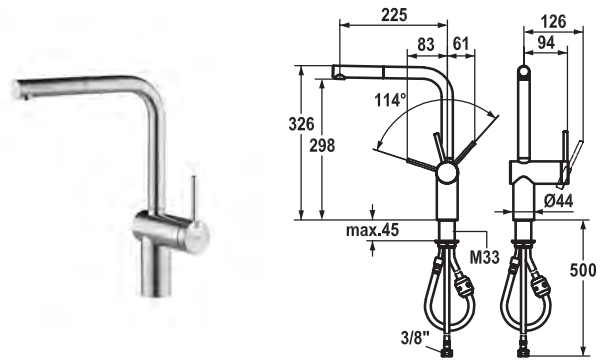

Art.-No.	KWC-No.	FUN
<b>122296</b>	<b>10.231.103.700FL</b>	115.0308.214
stainless steel, A 225, flexible connection hoses		

**Lever mixer • Kitchen**

Lever mixer

- Lever installation only possible on the right side
  - Child safety: cold water flow in lever position towards the front
- gap between wall and centre of mounting hole min. 60 mm
- TouchProtect - anti-scald protection thanks to the "double skin" principle
- Pull-out aerator
  - Neoperl® Caché®
  - up to 600 mm pull-out length
  - hose surface to fit faucet surface
- Hose guide, swivelling 360°
- EasyLock - a pull-out spray that easily slides back into place
- OptimalSpace - ample space for washing or working
- KWC cartridge M 35 H
  - with ceramic discs
  - flow rate and temperature continuously variable
- Flexible connection hoses 3/8"
- Fastening by means of threaded sleeve M33 x 1.5
- Mounting hole size ø35 mm


Flow rate 11 l/min (3 bar)  
Acoustic group II


**Lever mixer • Kitchen**

Lever mixer

- Lever installation only possible on the right side
  - Child safety: cold water flow in lever position towards the front
- gap between wall and centre of mounting hole min. 65 mm
- TouchProtect - anti-scald protection thanks to the "double skin" principle
- Pull-out aerator
  - Neoperl® Caché®
  - up to 600 mm pull-out length
  - hose surface to fit faucet surface
- Hose guide, swivelling 360°
- EasyLock - a pull-out spray that easily slides back into place
- OptimalSpace - ample space for washing or working
- KWC cartridge M 35 H
  - with ceramic discs
  - flow rate and temperature continuously variable
- Flexible connection hoses 3/8"
- Fastening by means of threaded sleeve M33 x 1.5
- Mounting hole size ø35 mm

Flow rate 11 l/min (3 bar)  
Acoustic group II






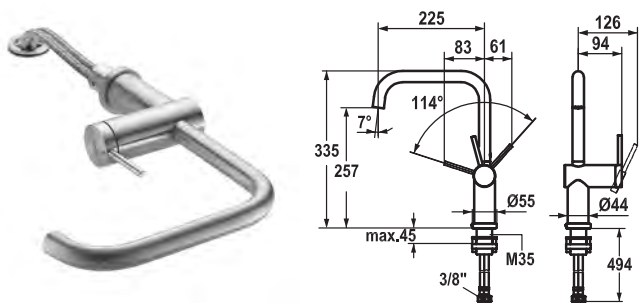
Art.-No.	KWC-No.	FUN
<b>123115</b>	<b>10.231.043.700FL</b>	115.0308.256
stainless steel, A 225, flexible connection hoses		

**Lever mixer • Kitchen • detachable**

Lever mixer

- Detachable for installation below windows - detached 55 mm
- Lever installation only possible on the right side
  - Child safety: cold water flow in lever position towards the front
- gap between wall and centre of mounting hole min. 65 mm
- Intrinsically safe against backflow
- Swivel spout 125°, extensible to 360°
  - Neoperl® Caché®
- OptimalSpace - ample space for washing or working
- KWC cartridge M 35 H
  - with ceramic discs
  - flow rate and temperature continuously variable
- Flexible connection hoses 3/8"
- Fastening by means of threaded sleeve M35 x 1.5 (preassembled socket)
- Mounting hole size ø35 - 37 mm

Flow rate 12 l/min (3 bar)  
Acoustic group II

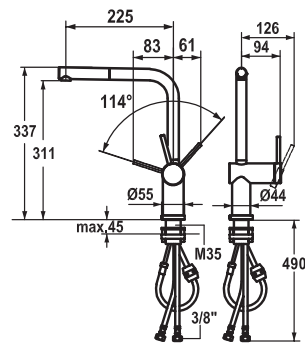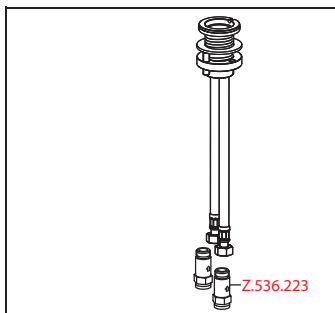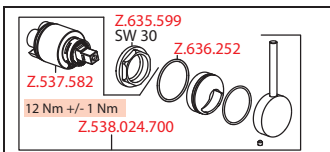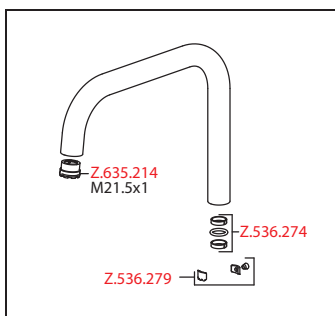








Art.-No.	KWC-No.	FUN
<b>123116</b>	<b>10.231.053.700FL</b>	115.0308.257
stainless steel, A 225, flexible connection hoses		


**Lever mixer • Kitchen • detachable**

Lever mixer


- Detachable for installation below windows - detached 55 mm
- Lever installation only possible on the right side
  - Child safety: cold water flow in lever position towards the front
- gap between wall and centre of mounting hole min. 65 mm
- TouchProtect - anti-scald protection thanks to the "double skin" principle
- Intrinsically safe against backflow
- Pull-out aerator
  - Neoperl® Caché®
  - up to 600 mm pull-out length
  - hose surface to fit faucet surface
- Hose guide, swivelling 360°
- EasyLock - a pull-out spray that easily slides back into place
- OptimalSpace - ample space for washing or working
- KWC cartridge M 35 H
  - with ceramic discs
  - flow rate and temperature continuously variable
- Flexible connection hoses 3/8"
- Fastening by means of threaded sleeve M35 x 1.5 (preassembled socket)
- Mounting hole size ø35 - 37 mm

Flow rate 11 l/min (3 bar)  
Acoustic group II

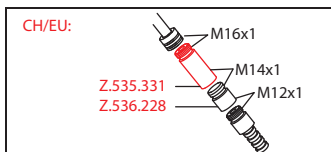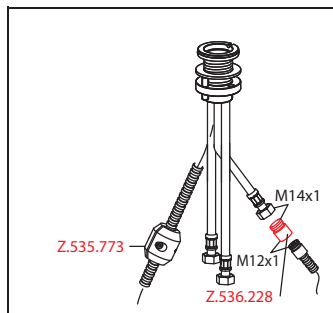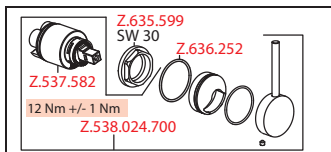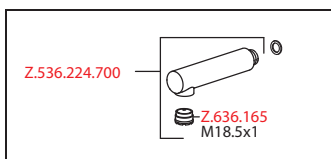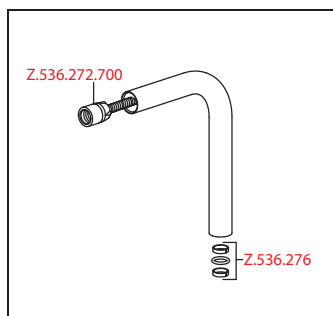

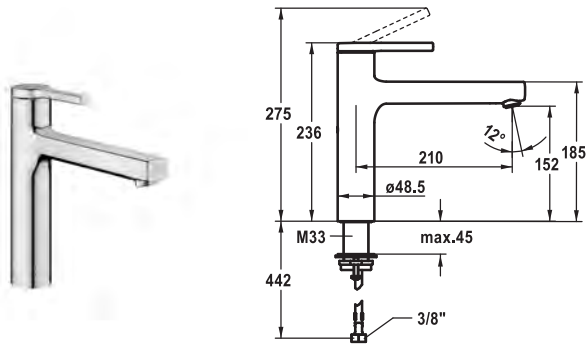

Art.-No.	KWC-No.	FUN
<b>125361</b>	<b>10.461.022.000FL</b>	
all chrome, A 210, flexible connection hoses		

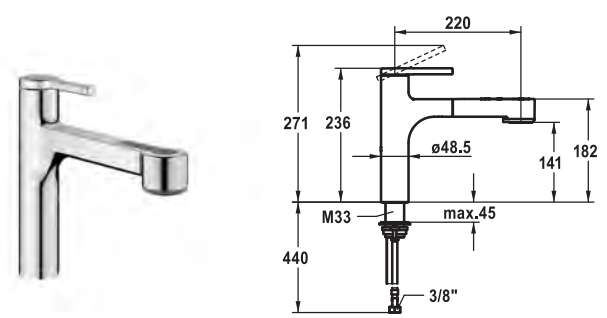

Art.-No.	KWC-No.	FUN
<b>125364</b>	<b>10.461.032.000FL</b>	
all chrome, A 220, flexible connection hoses		

**Lever mixer • Kitchen**



Lever mixer

- Swivel spout 150°
  - Neoperl® Cascade® SLC
- KWC cartridge M 35 S
  - with ceramic discs
  - flow rate and temperature continuously variable
  - temperature limitation
- Flexible connection hoses 3/8"
- QuickInstallation - Fastening via threaded connection with locking screws
- Mounting hole size 435 mm

**Lever mixer • Kitchen**




Lever mixer

- TouchProtect - anti-scald protection thanks to the "double skin" principle
- Intrinsically safe against backflow
- Pull-out spray
  - SprayClean - easy to clean and actively prevents limescale buildup
  - up to 600 mm pull-out length
  - TripleClean - Normal, soft, and power stream modes
  - hose surface to fit faucet surface
  - QuickConnect - Simple hose connection system
- Hose guide, swivelling 120°
- EasyLock - a pull-out spray that easily slides back into place
- KWC cartridge M 35 S
  - with ceramic discs
  - flow rate and temperature continuously variable
  - temperature limitation
- Flexible connection hoses 3/8"
- QuickInstallation - Fastening via threaded connection with locking screws
- Mounting hole size 435 mm

Acoustic group I


Spray outlet: Flow rate 11 l/min (3 bar)

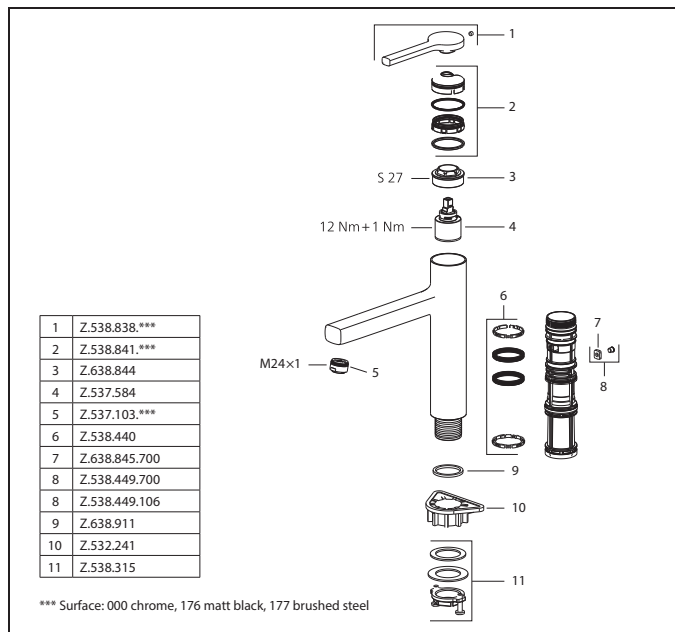


Flow rate normal spray 8 l/min (3 bar)

Flow rate needle spray 9 l/min (3 bar)

Acoustic group I

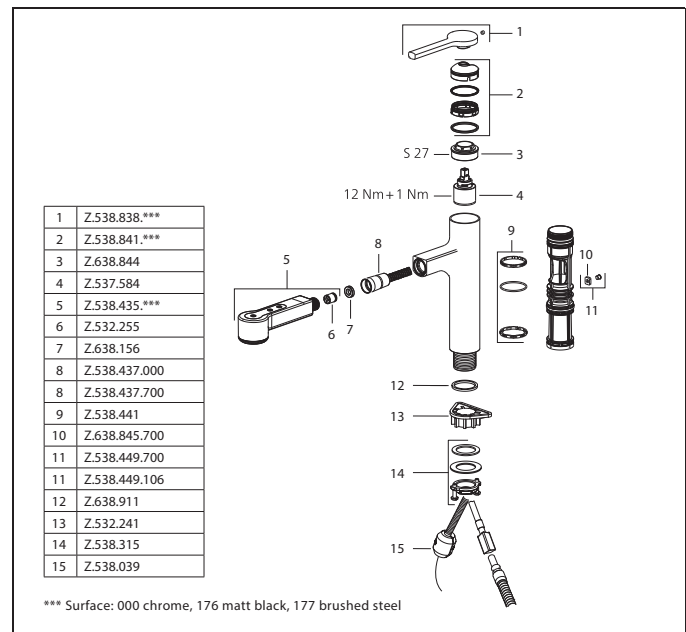

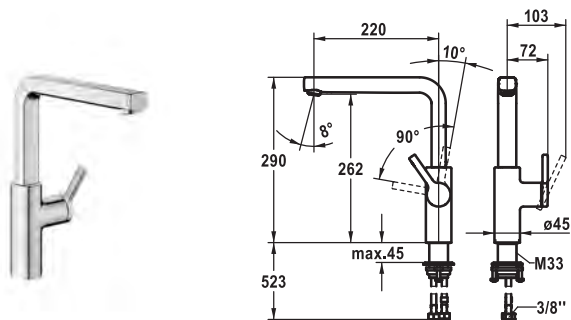

Art.-No.	KWC-No.	FUN
<b>125370</b>	<b>10.461.012.000FL</b>	
all chrome, A 220, flexible connection hoses		



**Lever mixer • Kitchen**



Lever mixer

- Lever installation only possible on the right side
  - Child safety: cold water flow in lever position towards the front
- gap between wall and centre of mounting hole min. 20 mm
- SwivelStop - swivel spout 150°, extensible to 360°
  - Neoperl® Cascade® SLC
- OptimalSpace - ample space for washing or working
- KWC cartridge M 35 S
  - with ceramic discs
  - flow rate and temperature continuously variable
  - temperature limitation
- Flexible connection hoses 3/8"
- QuickInstallation - Fastening via threaded connection with locking screws
- Mounting hole size ø35 mm
- To be ordered separately (optional or if necessary):
  - Swivel range limited to 120°, Z.538.320

Acoustic group I  
Spray outlet: Flow rate 12 l/min (3 bar)

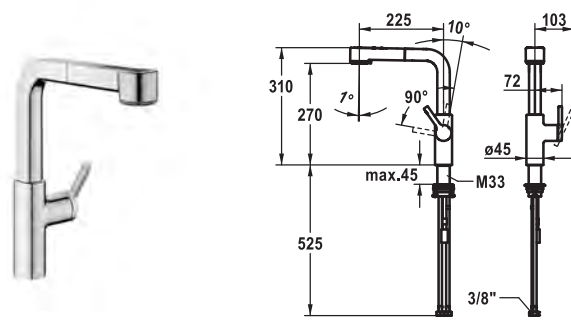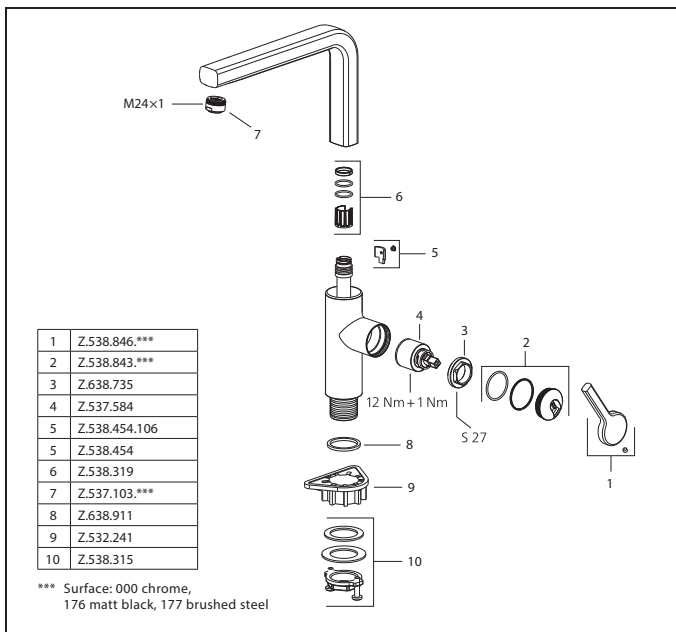

Art.-No.	KWC-No.	FUN
<b>125373</b>	<b>10.461.002.000FL</b>	
all chrome, A 225, flexible connection hoses		


**Lever mixer • Kitchen**




Lever mixer

- Lever installation only possible on the right side
  - Child safety: cold water flow in lever position towards the front
- gap between wall and centre of mounting hole min. 20 mm
- TouchProtect - anti-scald protection thanks to the "double skin" principle
- Intrinsically safe against backflow
- Pull-out spray
  - SprayClean - easy to clean and actively prevents limescale buildup
  - up to 600 mm pull-out length
  - TripleClean - Normal, soft, and power stream modes
  - hose surface to fit faucet surface
  - QuickConnect - Simple hose connection system
- Hose guide, swivelling 150°
- EasyLock - a pull-out spray that easily slides back into place
- OptimalSpace - ample space for washing or working
- KWC cartridge M 35 S
  - with ceramic discs
  - flow rate and temperature continuously variable
  - temperature limitation
- Flexible connection hoses 3/8"
- QuickInstallation - Fastening via threaded connection with locking screws
- Mounting hole size ø35 mm
- To be ordered separately (optional or if necessary):
  - Swivel range limited to 120°, Z.538.320


Flow rate normal spray 8 l/min (3 bar)  
Flow rate needle spray 9 l/min (3 bar)  
Acoustic group I

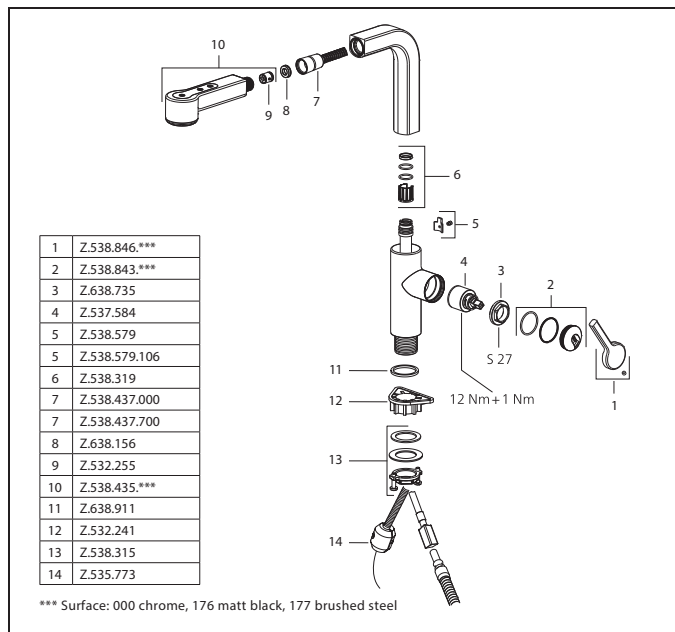



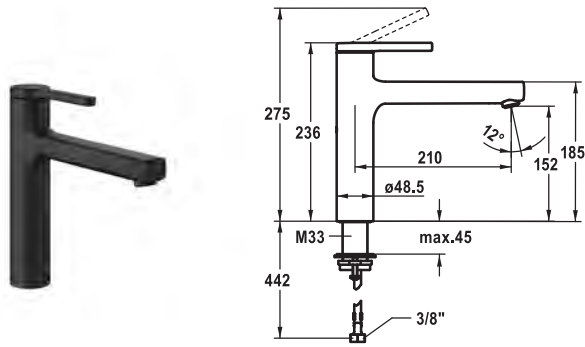

Art.-No.	KWC-No.	FUN
<b>125362</b>	<b>10.461.022.176FL</b>	
matt black, A 210, flexible connection hoses		

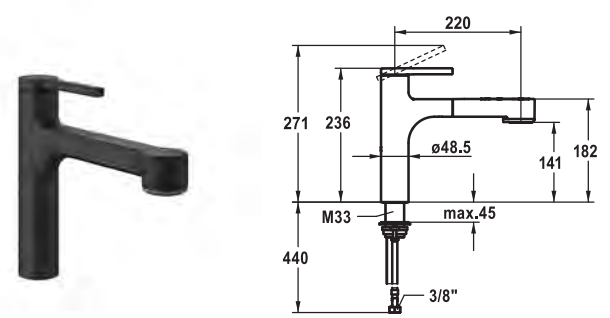

Art.-No.	KWC-No.	FUN
<b>125365</b>	<b>10.461.032.176FL</b>	
matt black, A 220, flexible connection hoses		

**Lever mixer • Kitchen**

Lever mixer

- Swivel spout 150°
  - Neoperl® Cascade® SLC
- KWC cartridge M 35 S
  - with ceramic discs
  - flow rate and temperature continuously variable
  - temperature limitation
- Flexible connection hoses 3/8"
- QuickInstallation - Fastening via threaded connection with locking screws
- Mounting hole size ø35 mm

**NEW**  
Coming soon

**Lever mixer • Kitchen**


Lever mixer

- TouchProtect - anti-scald protection thanks to the "double skin" principle
- Intrinsically safe against backflow
- Pull-out spray
  - SprayClean - easy to clean and actively prevents limescale buildup
  - up to 600 mm pull-out length
  - TripleClean - Normal, soft, and power stream modes
  - QuickConnect - Simple hose connection system
- Hose guide, swivelling 120°
- EasyLock - a pull-out spray that easily slides back into place
- KWC cartridge M 35 S
  - with ceramic discs
  - flow rate and temperature continuously variable
  - temperature limitation
- Flexible connection hoses 3/8"
- QuickInstallation - Fastening via threaded connection with locking screws
- Mounting hole size ø35 mm

**NEW**  
Coming soon

Acoustic group I


Spray outlet: Flow rate 11 l/min (3 bar)

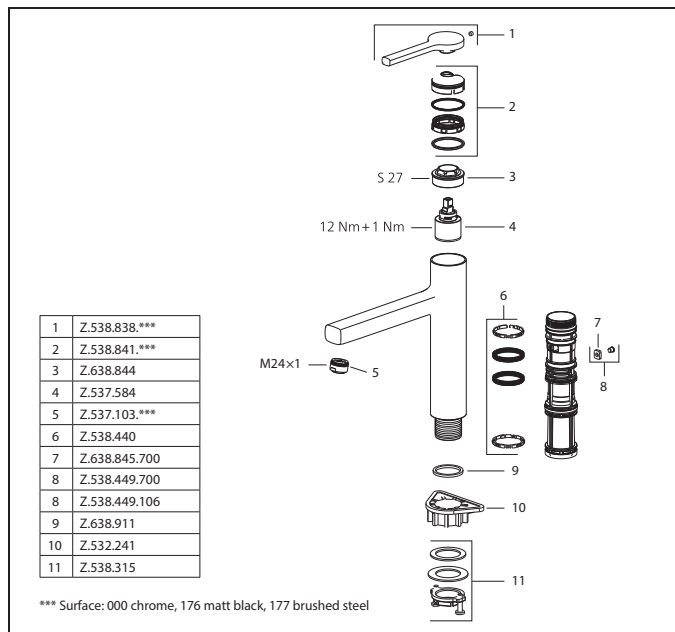


Flow rate normal spray 8 l/min (3 bar)

Flow rate needle spray 9 l/min (3 bar)

Acoustic group I

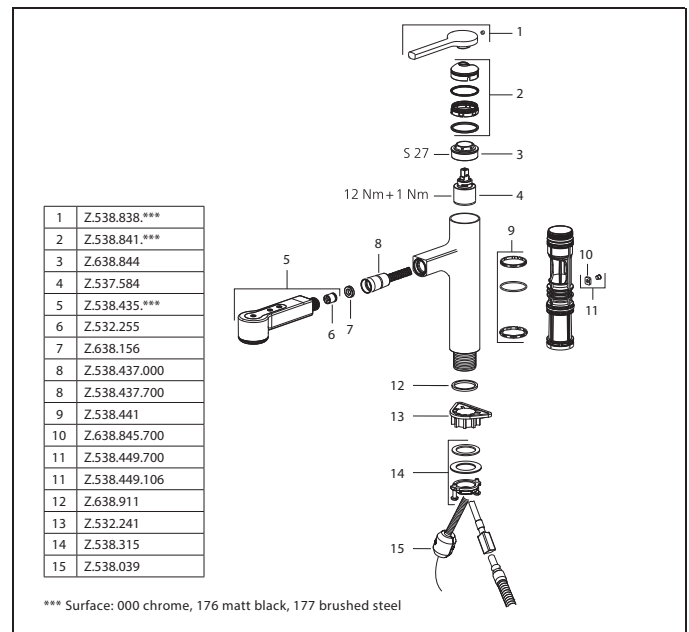

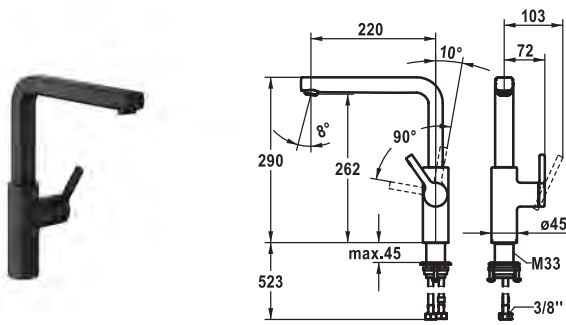

Art.-No. **125371** KWC-No. **10.461.012.176FL** FUN  
 matt black, A 220, flexible connection hoses

### Lever mixer • Kitchen

Lever mixer



- Lever installation only possible on the right side
  - Child safety: cold water flow in lever position towards the front
- gap between wall and centre of mounting hole min. 20 mm
- SwivelStop - swivel spout 150°, extensible to 360°
  - Neoperl® Cascade® SLC
- OptimalSpace - ample space for washing or working
- KWC cartridge M 35 S
  - with ceramic discs
  - flow rate and temperature continuously variable
  - temperature limitation
- Flexible connection hoses 3/8"
- QuickInstallation - Fastening via threaded connection with locking screws
- Mounting hole size  $\varnothing 35$  mm
- To be ordered separately (optional or if necessary):
  - Swivel range limited to 120°, Z.538.320

NEW

Coming soon

Acoustic group I

Spray outlet: Flow rate 12 l/min (3 bar)

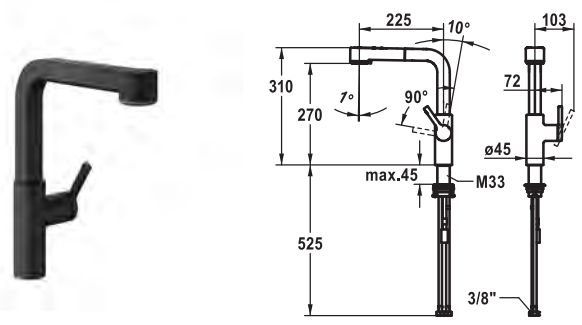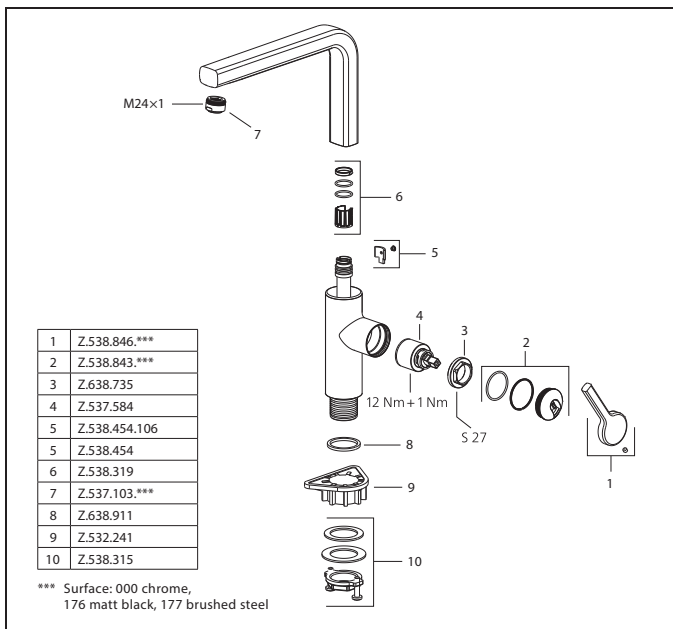

Art.-No. **125374** KWC-No. **10.461.002.176FL** FUN  
 matt black, A 225, flexible connection hoses

### Lever mixer • Kitchen

Lever mixer

- Lever installation only possible on the right side
  - Child safety: cold water flow in lever position towards the front
- gap between wall and centre of mounting hole min. 20 mm
- TouchProtect - anti-scald protection thanks to the "double skin" principle
- Intrinsically safe against backflow
- Pull-out spray
  - SprayClean - easy to clean and actively prevents limescale buildup
  - up to 600 mm pull-out length
  - TripleClean - Normal, soft, and power stream modes
  - QuickConnect - Simple hose connection system
- Hose guide, swivelling 150°
- EasyLock - a pull-out spray that easily slides back into place
- OptimalSpace - ample space for washing or working
- KWC cartridge M 35 S
  - with ceramic discs
  - flow rate and temperature continuously variable
  - temperature limitation
- Flexible connection hoses 3/8"
- QuickInstallation - Fastening via threaded connection with locking screws
- Mounting hole size  $\varnothing 35$  mm
- To be ordered separately (optional or if necessary):
  - Swivel range limited to 120°, Z.538.320


NEW


Coming soon

Flow rate normal spray 8 l/min (3 bar)

Flow rate needle spray 9 l/min (3 bar)

Acoustic group I

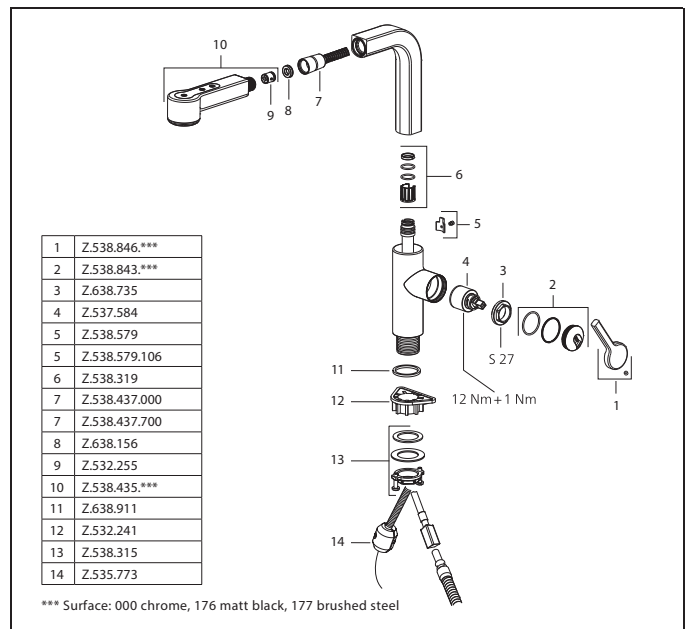

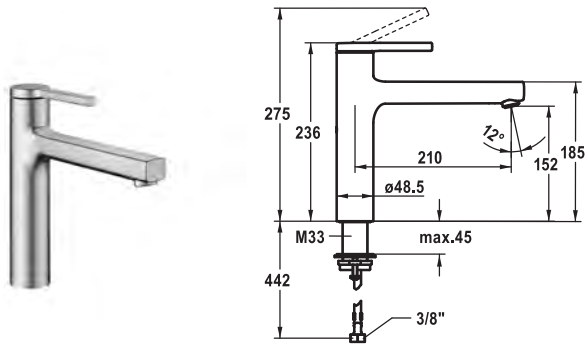

Art.-No.	KWC-No.	FUN
<b>125363</b>	<b>10.461.022.177FL</b>	
brushed steel, A 210, flexible connection hoses		


**Lever mixer • Kitchen**

Lever mixer

- Swivel spout 150°
  - Neoperl® Cascade® SLC
- KWC cartridge M 35 S
  - with ceramic discs
  - flow rate and temperature continuously variable
  - temperature limitation
- Flexible connection hoses 3/8"
- QuickInstallation - Fastening via threaded connection with locking screws
- Mounting hole size  $\varnothing 35$  mm

**NEW**

Coming soon

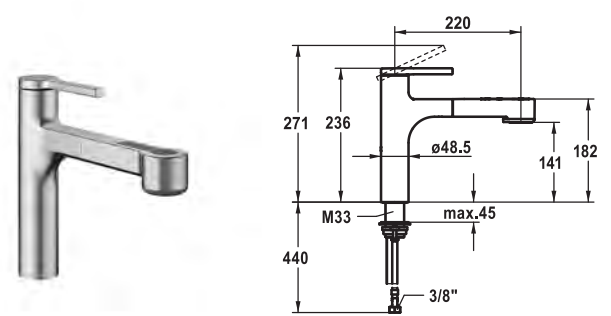

Art.-No.	KWC-No.	FUN
<b>125366</b>	<b>10.461.032.177FL</b>	
brushed steel, A 220, flexible connection hoses		

**Lever mixer • Kitchen**

Lever mixer


- TouchProtect - anti-scald protection thanks to the "double skin" principle
- Intrinsically safe against backflow
- Pull-out spray
  - SprayClean - easy to clean and actively prevents limescale buildup
  - up to 600 mm pull-out length
  - TripleClean - Normal, soft, and power stream modes
  - hose surface to fit faucet
  - QuickConnect - Simple hose connection system
- Hose guide, swivelling 120°
- EasyLock - a pull-out spray that easily slides back into place
- KWC cartridge M 35 S
  - with ceramic discs
  - flow rate and temperature continuously variable
  - temperature limitation
- Flexible connection hoses 3/8"
- QuickInstallation - Fastening via threaded connection with locking screws
- Mounting hole size  $\varnothing 35$  mm

**NEW**

Coming soon

Acoustic group I


Spray outlet: Flow rate 11 l/min (3 bar)

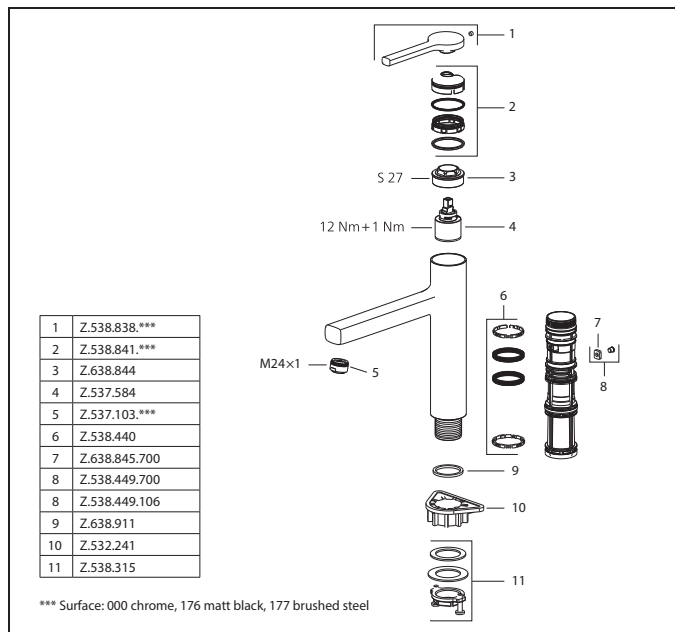


Flow rate normal spray 8 l/min (3 bar)

Flow rate needle spray 9 l/min (3 bar)

Acoustic group I

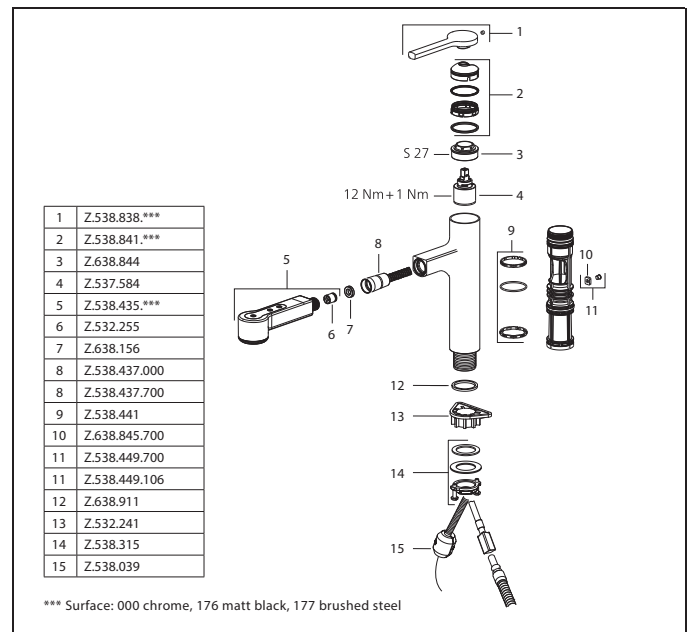

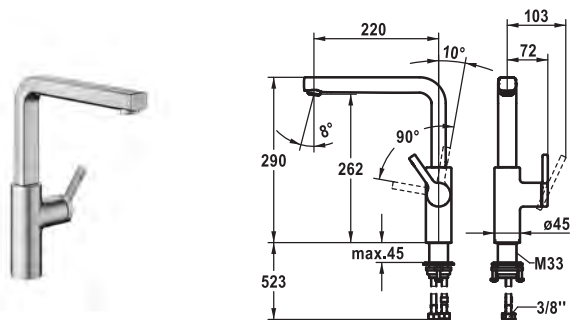


**Art.-No.** **KWC-No.** **FUN**  
**125372** **10.461.012.177FL**  
 brushed steel, A 220, flexible connection hoses

**Lever mixer • Kitchen**

Lever mixer

- Lever installation only possible on the right side
  - Child safety: cold water flow in lever position towards the front
- gap between wall and centre of mounting hole min. 20 mm
- SwivelStop - swivel spout 150°, extensible to 360°
  - Neoperl® Cascade® SLC
- OptimalSpace - ample space for washing or working
- KWC cartridge M 35 S
  - with ceramic discs
  - flow rate and temperature continuously variable
  - temperature limitation
- Flexible connection hoses 3/8"
- QuickInstallation - Fastening via threaded connection with locking screws
- Mounting hole size ø35 mm
- To be ordered separately (optional or if necessary):
  - Swivel range limited to 120°, Z.538.320

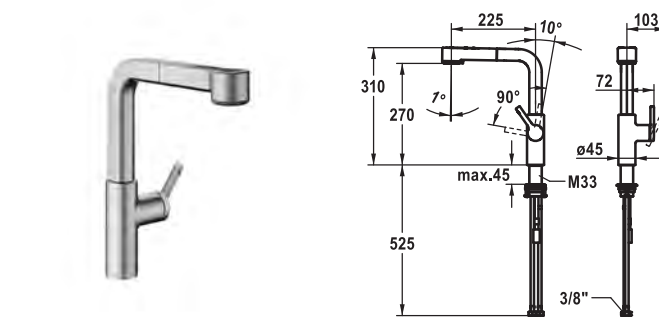

**Art.-No.** **KWC-No.** **FUN**  
**125375** **10.461.002.177FL**  
 brushed steel, A 225, flexible connection hoses


**Lever mixer • Kitchen**

Lever mixer


- Lever installation only possible on the right side
  - Child safety: cold water flow in lever position towards the front
- gap between wall and centre of mounting hole min. 20 mm
- TouchProtect - anti-scald protection thanks to the "double skin" principle
- Intrinsically safe against backflow
- Pull-out spray
  - SprayClean - easy to clean and actively prevents limescale buildup
  - up to 600 mm pull-out length
  - TripleClean - Normal, soft, and power stream modes
  - hose surface to fit faucet surface
  - QuickConnect - Simple hose connection system
- Hose guide, swivelling 150°
- EasyLock - a pull-out spray that easily slides back into place
- OptimalSpace - ample space for washing or working
- KWC cartridge M 35 S
  - with ceramic discs
  - flow rate and temperature continuously variable
  - temperature limitation
- Flexible connection hoses 3/8"
- QuickInstallation - Fastening via threaded connection with locking screws
- Mounting hole size ø35 mm
- To be ordered separately (optional or if necessary):
  - Swivel range limited to 120°, Z.538.320




Acoustic group I  
 Spray outlet: Flow rate 12 l/min (3 bar)

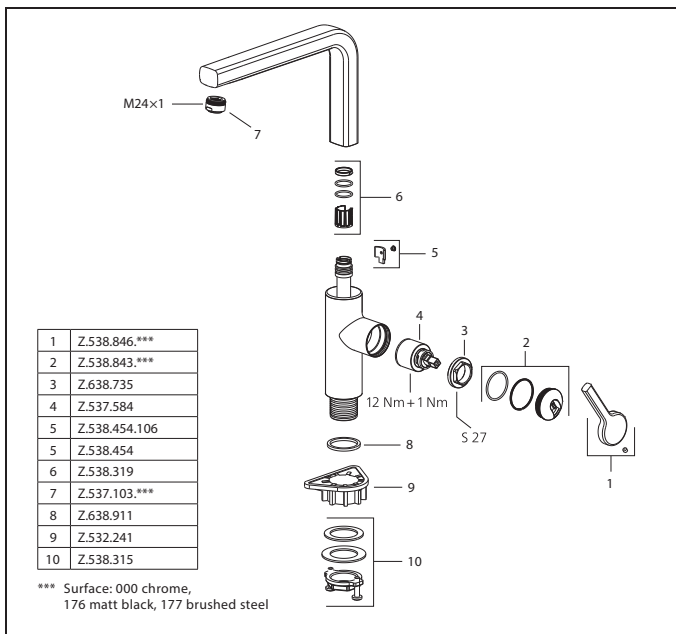

Flow rate normal spray 8 l/min (3 bar)  
 Flow rate needle spray 9 l/min (3 bar)  
 Acoustic group I

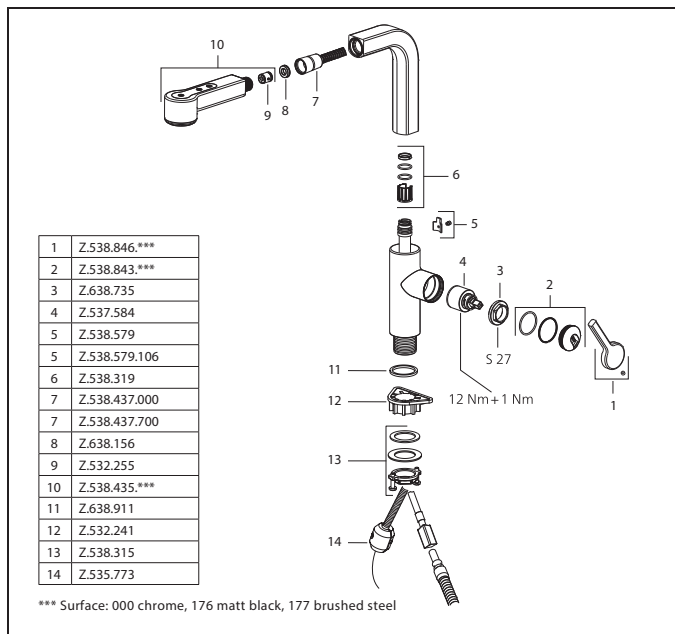

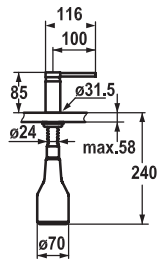


Art.-No.	KWC-No.	FUN
<b>536159</b>	<b>Z.536.159.000</b>	119.0200.126
all chrome		
<b>536177</b>	<b>Z.536.159.127</b>	119.0308.347
decor steel		

**Soap dispensers**

Soap dispenser KWC AVA

- Easily refillable from top without disassembly
- Mounting hole size  $\varnothing 26$  mm
- Scope of delivery:
  - Pump
  - Soap container, filling capacity 350 ml Z.635.713

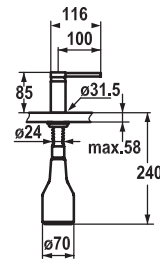


Art.-No.	KWC-No.	FUN
<b>538981</b>	<b>Z.536.159.176</b>	
matt black		

**Soap dispensers**

Soap dispenser KWC AVA

- Easily refillable from top without disassembly
- Mounting hole size  $\varnothing 26$  mm
- Scope of delivery:
  - Pump
  - Soap container, filling capacity 350 ml Z.635.713



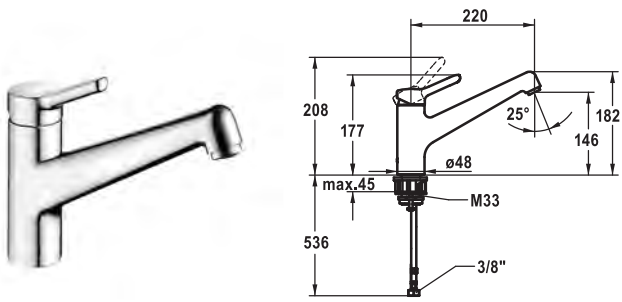

Art.-No.	KWC-No.	FUN
<b>125176</b>	<b>10.471.022.000FL</b>	115.0674.157
all chrome, A 220, flexible connection hoses		



### Lever mixer • Kitchen

Lever mixer

- Swivel spout 160°
  - Neoperl® Perlator® SJR, swivelling jet regulator
- OptimalSpace - ample space for washing or working
- KWC cartridge M 35 H
  - with ceramic discs
  - flow rate and temperature continuously variable
- Flexible connection hoses 3/8"
- QuickInstallation - Fastening via threaded connection with locking screws
- Mounting hole size ø35 mm

NEW

Flow rate 12 l/min (3 bar)  
Acoustic group I

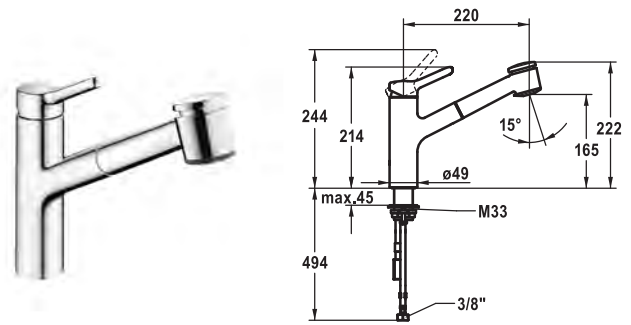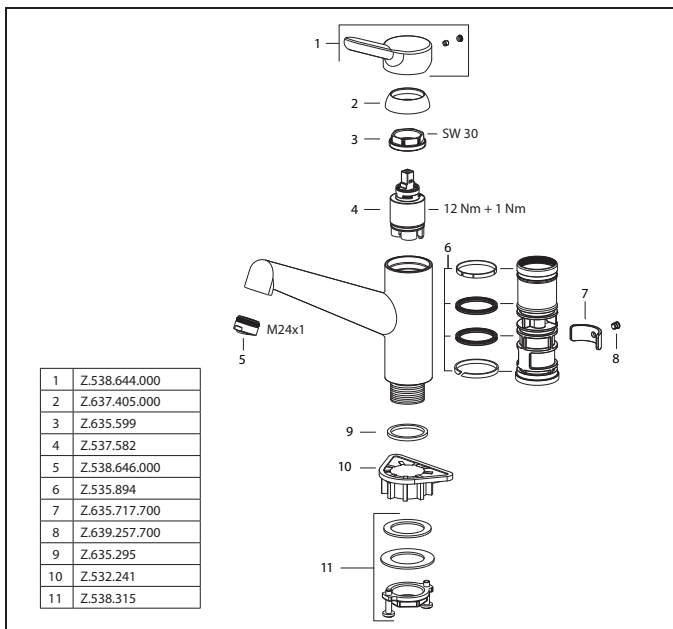

Art.-No.	KWC-No.	FUN
<b>125178</b>	<b>10.471.032.000FL</b>	115.0674.158
all chrome, A 220, flexible connection hoses		


### Lever mixer • Kitchen


Lever mixer

- TouchProtect - anti-scald protection thanks to the "double skin" principle
- Intrinsically safe against backflow
- Pull-out spray
  - SprayClean - easy to clean and actively prevents limescale buildup
  - up to 600 mm pull-out length
  - hose surface to fit faucet surface
  - QuickConnect - Simple hose connection system
- Hose guide, swivelling 130°
- EasyLock - a pull-out spray that easily slides back into place
- OptimalSpace - ample space for washing or working
- KWC cartridge M 35 H
  - with ceramic discs
  - flow rate and temperature continuously variable
- Flexible connection hoses 3/8"
- QuickInstallation - Fastening via threaded connection with locking screws
- Mounting hole size ø35 mm


NEW

Flow rate normal spray 10 l/min (3 bar)  
Flow rate needle spray 10 l/min (3 bar)  
Acoustic group II

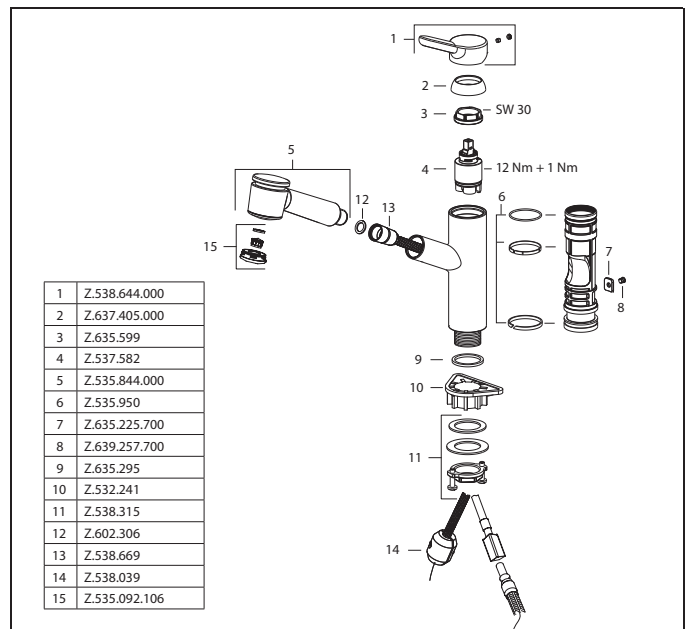

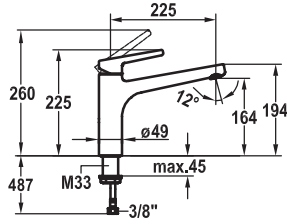

Art.-No.	KWC-No.	FUN
<b>123952</b>	<b>10.171.023.000FL</b>	115.0480.418
all chrome, A 225, flexible connection hoses		

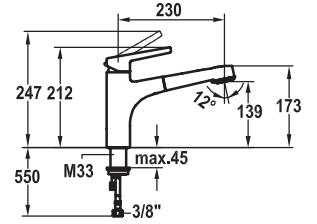

Art.-No.	KWC-No.	FUN
<b>123959</b>	<b>10.171.033.000FL</b>	115.0480.633
all chrome, A 230, flexible connection hoses		

**Lever mixer • Kitchen**

Lever mixer




- Swivel spout 160°
  - Neoperl® Cascade®
- KWC cartridge M 35 H
  - with ceramic discs
  - flow rate and temperature continuously variable
- Flexible connection hoses 3/8"
- Fastening by means of threaded sleeve M33 x 1.5
- Mounting hole size ø35 mm

**Lever mixer • Kitchen**





Lever mixer


- TouchProtect - anti-scald protection thanks to the "double skin" principle
- Pull-out spray
  - SprayClean - easy to clean and actively prevents limescale buildup
  - up to 600 mm pull-out length
  - PowerClean - needle spray mode, with automatic diverter reset
  - hose surface to fit faucet surface
- Hose guide, swivelling 130°
- EasyLock - a pull-out spray that easily slides back into place
- KWC cartridge M 35 H
  - with ceramic discs
  - flow rate and temperature continuously variable
- Flexible connection hoses 3/8"
- Fastening by means of threaded sleeve M33 x 1.5
- Mounting hole size ø35 mm

Flow rate 12 l/min (3 bar)  
Acoustic group I

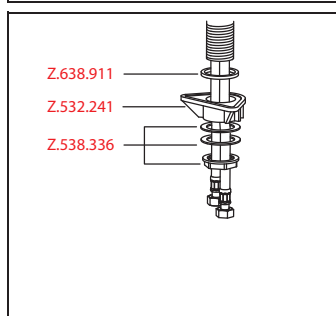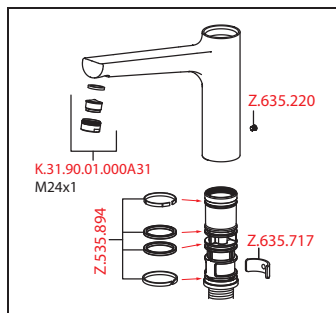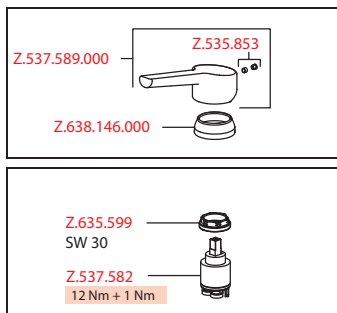


Flow rate normal spray 11 l/min (3 bar)  
Flow rate needle spray 11 l/min (3 bar)  
Acoustic group I

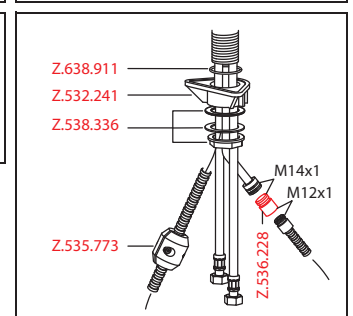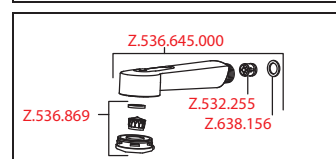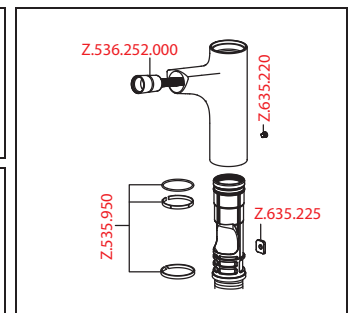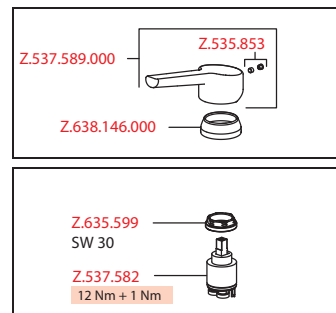

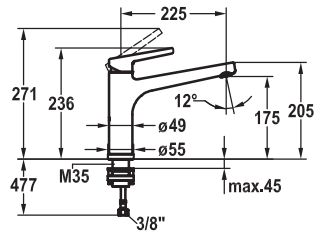

Art.-No.	KWC-No.	FUN
<b>123955</b>	<b>10.171.043.000FL</b>	115.0480.498
all chrome, A 225, flexible connection hoses		

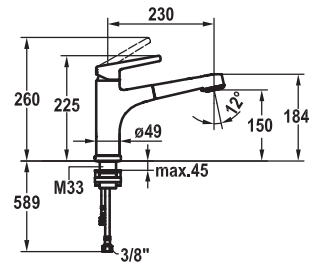


Art.-No.	KWC-No.	FUN
<b>123963</b>	<b>10.171.053.000FL</b>	115.0480.637
all chrome, A 230, flexible connection hoses		

### Lever mixer • Kitchen • detachable

Lever mixer

- Detachable for installation below windows - detached 55 mm
- Intrinsically safe against backflow
- Swivel spout 160°
  - Neoperl® Cascade®
- KWC cartridge M 35 H
  - with ceramic discs
  - flow rate and temperature continuously variable
- Flexible connection hoses 3/8"
- Fastening by means of threaded sleeve M35 x 1.5 (preassembled socket)
- Mounting hole size  $\varnothing 35 - 37$  mm

Flow rate 12 l/min (3 bar)  
Acoustic group I

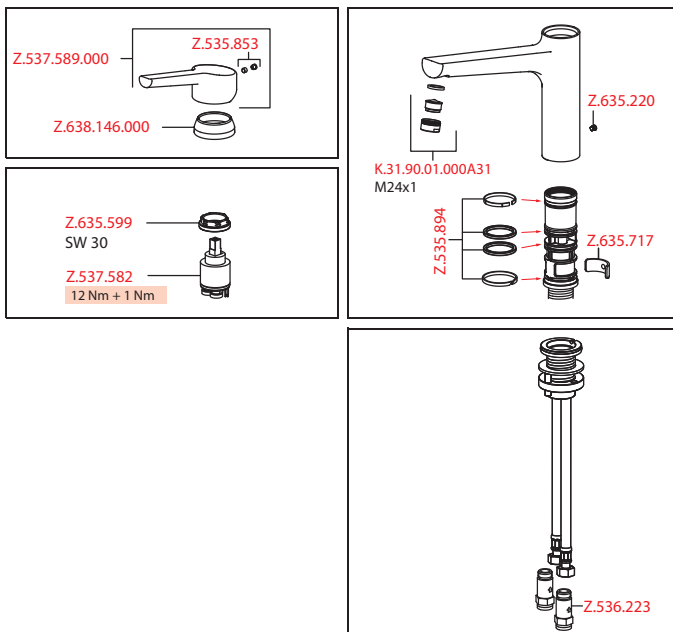


### Lever mixer • Kitchen • detachable


Lever mixer

- Detachable for installation below windows - detached 55 mm
- TouchProtect - anti-scald protection thanks to the "double skin" principle
- Intrinsically safe against backflow
- Pull-out spray
  - SprayClean - easy to clean and actively prevents limescale buildup
  - up to 600 mm pull-out length
  - PowerClean - needle spray mode, with automatic diverter reset
  - hose surface to fit faucet surface
- Hose guide, swivelling 130°
- EasyLock - a pull-out spray that easily slides back into place
- KWC cartridge M 35 H
  - with ceramic discs
  - flow rate and temperature continuously variable
- Flexible connection hoses 3/8"
- Fastening by means of threaded sleeve M35 x 1.5 (preassembled socket)
- Mounting hole size  $\varnothing 35 - 37$  mm


Flow rate normal spray 11 l/min (3 bar)  
Flow rate needle spray 11 l/min (3 bar)  
Acoustic group I

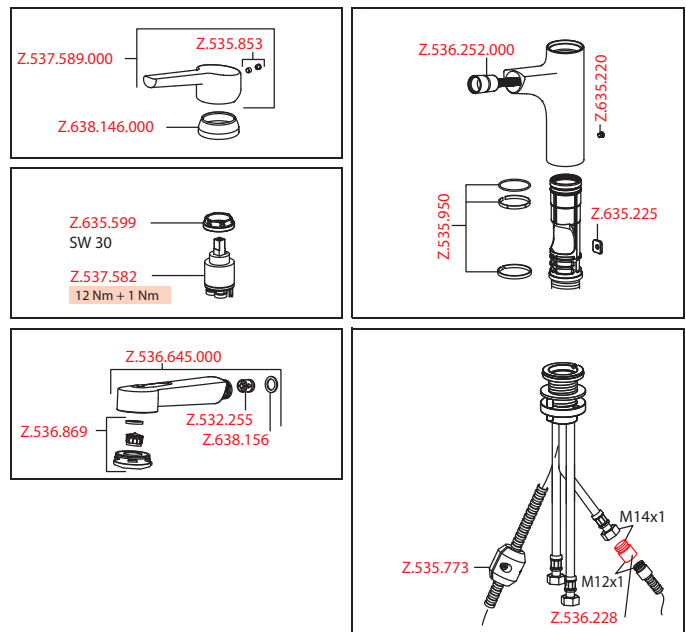



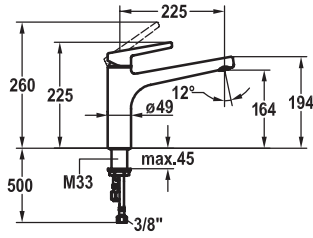

Art.-No.	KWC-No.	FUN
<b>123954</b>	<b>10.175.023.000FL</b>	115.0480.492
all chrome, A 225, flexible connection hoses		

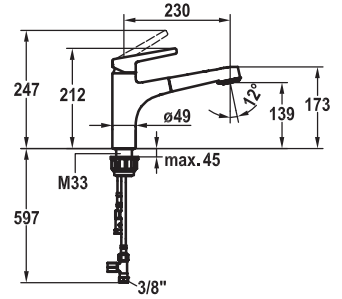

Art.-No.	KWC-No.	FUN
<b>123962</b>	<b>10.175.033.000FL</b>	115.0480.636
all chrome, A 230, flexible connection hoses		

**Lever mixer • Kitchen • Low pressure**



Lever mixer

- Swivel spout 160°
  - Jet regulator
- KWC cartridge M 35 H
  - with ceramic discs
  - flow rate and temperature continuously variable
- Flexible connection hoses 3/8"
- Fastening by means of threaded sleeve M33 x 1.5
- Mounting hole size ø35 mm

**Lever mixer • Kitchen • Low pressure**











Lever mixer

- TouchProtect - anti-scald protection thanks to the "double skin" principle
- Pull-out spray
  - SprayClean - easy to clean and actively prevents limescale buildup
  - up to 600 mm pull-out length
  - PowerClean - needle spray mode, with automatic diverter reset
  - hose surface to fit faucet surface
- Hose guide, swivelling 130°
- EasyLock - a pull-out spray that easily slides back into place
- KWC cartridge M 35 H
  - with ceramic discs
  - flow rate and temperature continuously variable
- Flexible connection hoses 3/8"
- Fastening by means of threaded sleeve M33 x 1.5
- Mounting hole size ø35 mm

Flow rate 6 l/min (3 bar)  
Acoustic group I

Flow rate normal spray 7 l/min (3 bar)  
Flow rate needle spray 7 l/min (3 bar)  
Acoustic group I

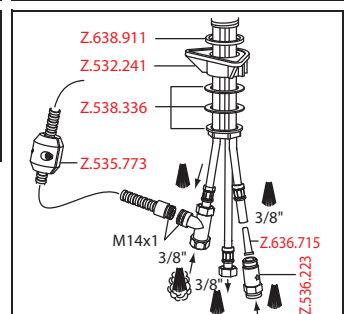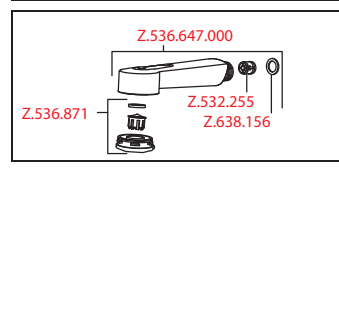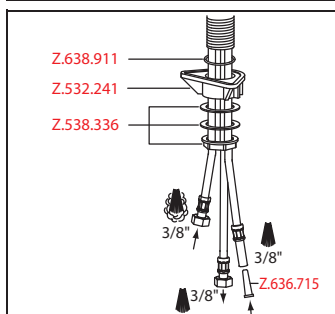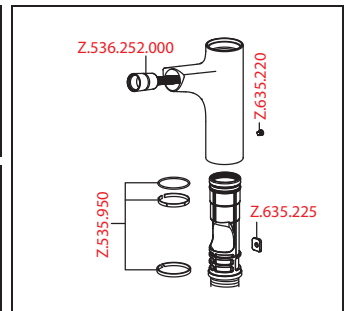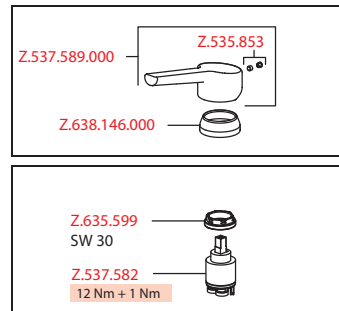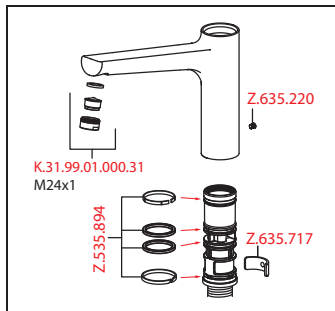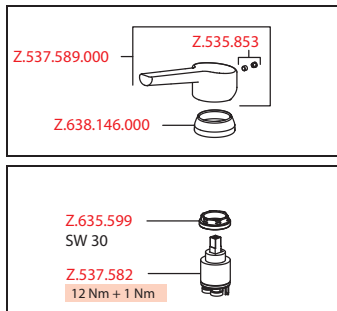

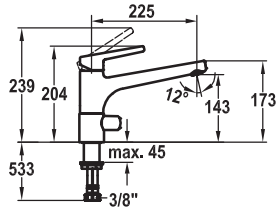



Art.-No.	KWC-No.	FUN
<b>123956</b>	<b>10.171.063.000FL</b>	115.0480.480
all chrome, A 225, flexible connection hoses		

**Lever mixer • Kitchen • Integrated shut-off valve**

Lever mixer

- Default shut-off valve position
- Swivel spout 160°
  - Neoperl® Cascade®
- KWC cartridge M 35 H
  - with ceramic discs
  - flow rate and temperature continuously variable
- Flexible connection hoses 3/8"
- Fastening by means of threaded sleeve M33 x 1.5
- Mounting hole size ø35 mm

Flow rate 12 l/min (3 bar)  
Acoustic group II

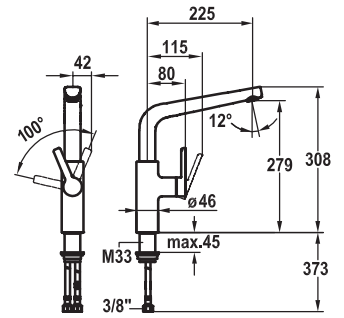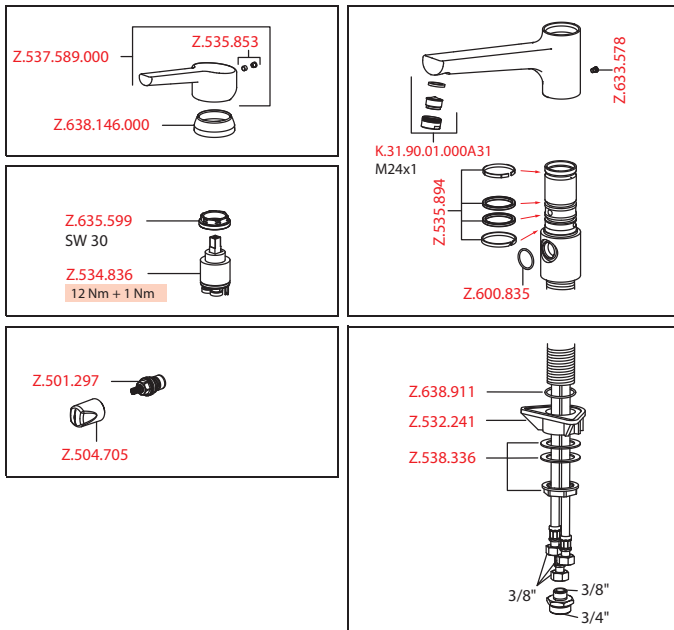


Art.-No.	KWC-No.	FUN
<b>123967</b>	<b>10.171.013.000FL</b>	115.0480.661
all chrome, A 225, flexible connection hoses		

**Lever mixer • Kitchen**


Lever mixer

- Lever installation only possible on the right side
  - Child safety: cold water flow in lever position towards the front
- gap between wall and centre of mounting hole min. 42 mm
- Swivel spout 360°
  - Neoperl® Cascade®
- OptimalSpace - ample space for washing or working
- KWC cartridge S 25
  - with ceramic discs
  - flow rate and temperature continuously variable
- Flexible connection hoses 3/8"
- Fastening by means of threaded sleeve M33 x 1.5
- Mounting hole size ø35 mm

Flow rate 10 l/min (3 bar)  
Acoustic group II

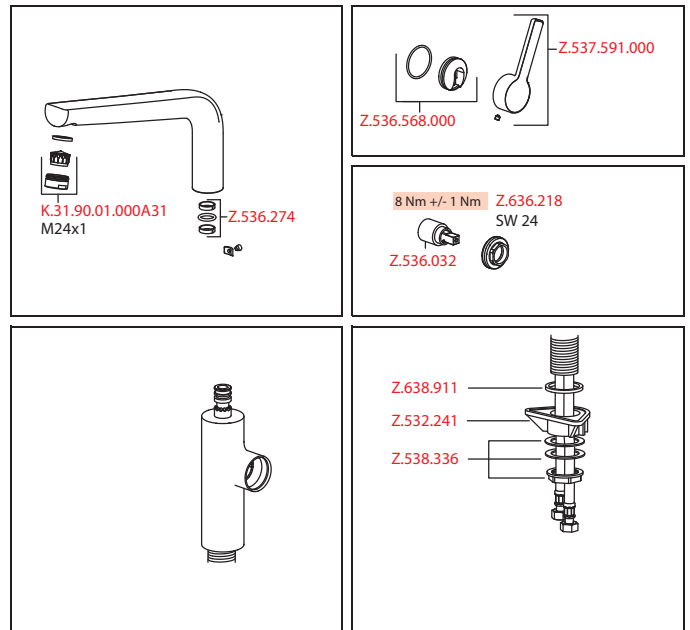



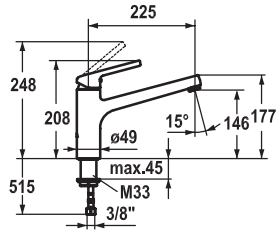



Art.-No.	KWC-No.	FUN
<b>123818</b>	<b>10.441.023.000FL</b>	115.0457.304
all chrome, A 225, flexible connection hoses		

**Lever mixer • Kitchen**

Lever mixer

- Swivel spout 160°
  - Neoperl® Cascade®
- KWC cartridge M 35
  - with ceramic discs
  - flow rate and temperature continuously variable
- Flexible connection hoses 3/8"
- Fastening by means of threaded sleeve M33 x 1.5
- Mounting hole size ø35 mm

Flow rate normal spray 11 l/min (3 bar)  
 Flow rate 12 l/min (3 bar)  
 Acoustic group I

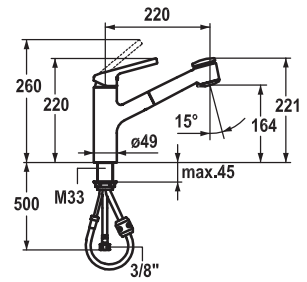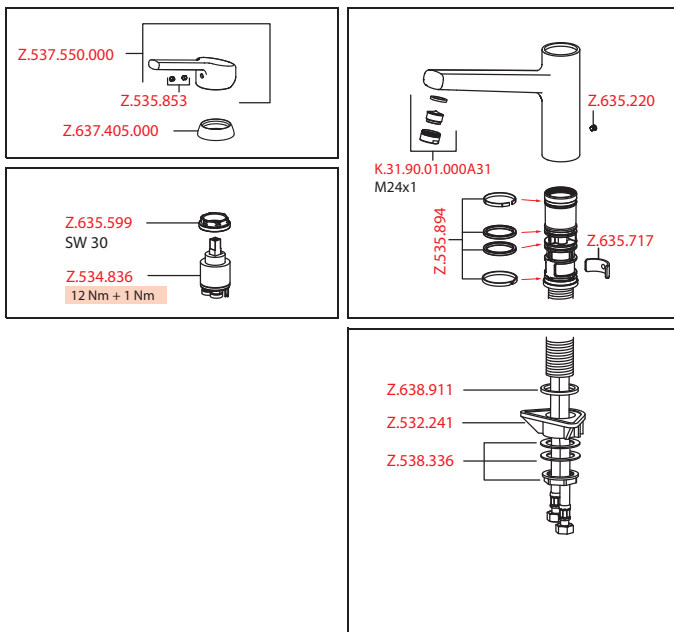


Art.-No.	KWC-No.	FUN
<b>123820</b>	<b>10.441.033.000FL</b>	115.0457.309
all chrome, A 220, flexible connection hoses		


**Lever mixer • Kitchen**

Lever mixer


- TouchProtect - anti-scald protection thanks to the "double skin" principle
- Pull-out spray
  - SprayClean - easy to clean and actively prevents limescale buildup
  - up to 600 mm pull-out length
  - PowerClean - needle spray mode, with automatic diverter reset
  - QuickConnect - Simple hose connection system
- Hose guide, swivelling 130°
- EasyLock - a pull-out spray that easily slides back into place
- KWC cartridge M 35
  - with ceramic discs
  - flow rate and temperature continuously variable
- Flexible connection hoses 3/8"
- Fastening by means of threaded sleeve M33 x 1.5
- Mounting hole size ø35 mm

Flow rate normal spray 10 l/min (3 bar)  
 Flow rate needle spray 10 l/min (3 bar)  
 Acoustic group II

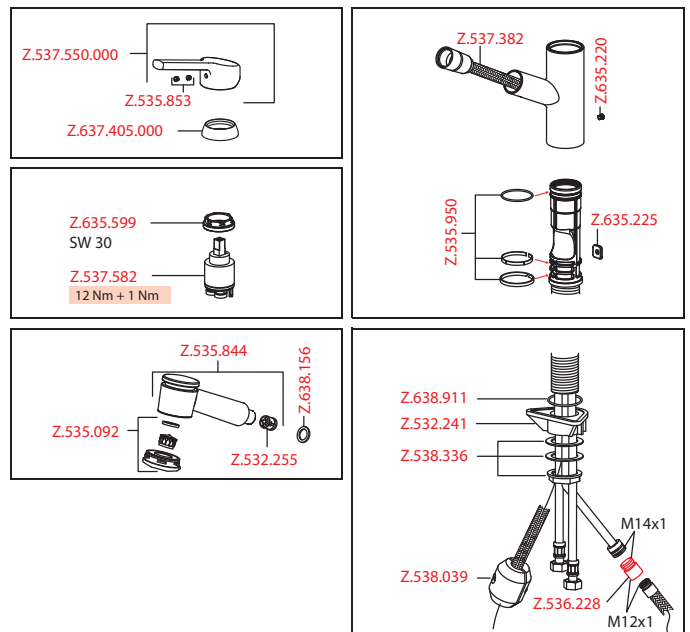

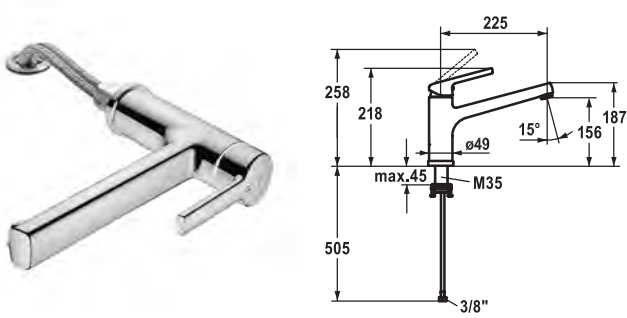

Art.-No.	KWC-No.	FUN
<b>125135</b>	<b>10.441.043.000FL</b>	115.0603.259
all chrome, A 225, flexible connection hoses		

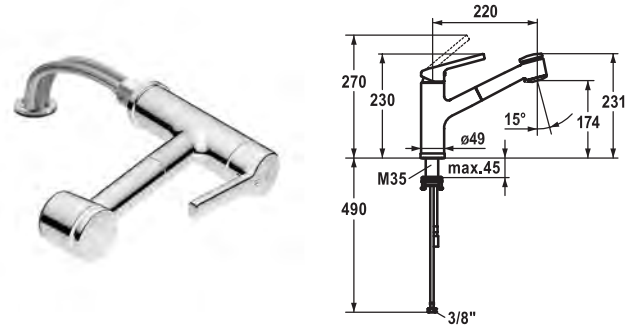

Art.-No.	KWC-No.	FUN
<b>125136</b>	<b>10.441.053.000FL</b>	115.0603.260
all chrome, A 220, flexible connection hoses		

**Lever mixer • Kitchen • detachable**

Lever mixer


- Detachable for installation below windows - detached 55 mm
- Swivel spout 160°
  - Neoperl® Cascade®
- KWC cartridge M 35
  - with ceramic discs
  - flow rate and temperature continuously variable
- Flexible connection hoses 3/8"
- Fastening by means of threaded sleeve M35 x 1.5 (preassembled socket)
- Mounting hole size ø35 - 37 mm

**Lever mixer • Kitchen • detachable**


Lever mixer


- Detachable for installation below windows - detached 55 mm
- TouchProtect - anti-scald protection thanks to the "double skin" principle
- Pull-out spray
  - SprayClean - easy to clean and actively prevents limescale buildup
  - up to 600 mm pull-out length
  - PowerClean - needle spray mode, with automatic diverter reset
- Hose guide, swivelling 130°
- EasyLock - a pull-out spray that easily slides back into place
- KWC cartridge M 35
  - with ceramic discs
  - flow rate and temperature continuously variable
- Flexible connection hoses 3/8"
- Fastening by means of threaded sleeve M35 x 1.5 (preassembled socket)
- Mounting hole size ø35 - 37 mm

Flow rate 12 l/min (3 bar)  
Acoustic group I

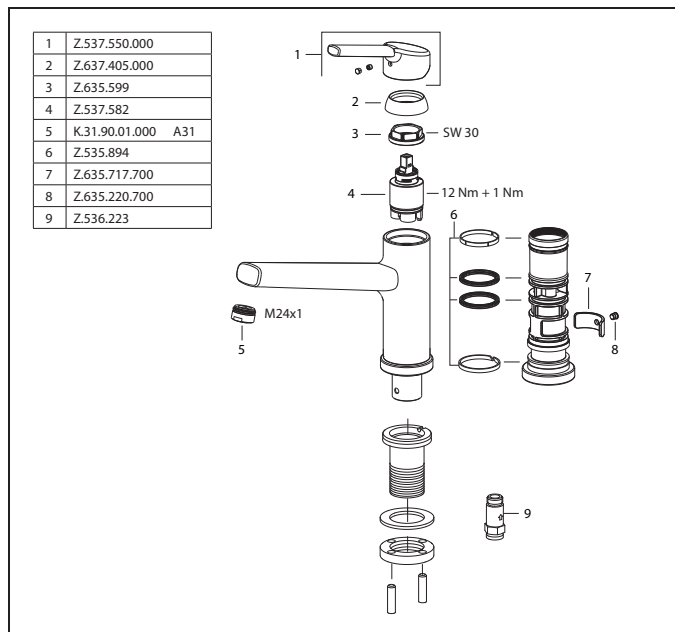

Flow rate normal spray 10 l/min (3 bar)  
Flow rate needle spray 9 l/min (3 bar)  
Acoustic group I

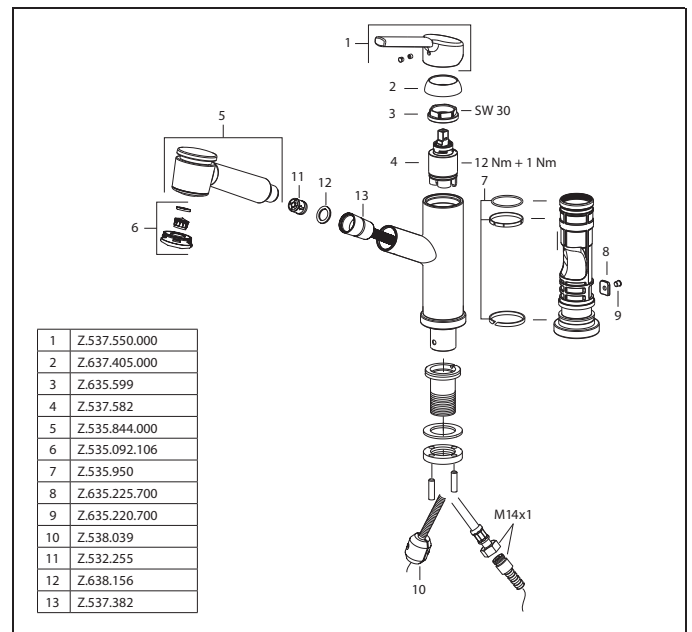

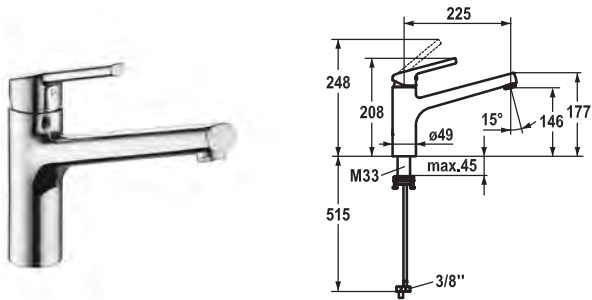

Art.-No.	KWC-No.	FUN
<b>125137</b>	<b>10.445.023.000FL</b>	115.0603.291
all chrome, A 225, flexible connection hoses		



**Lever mixer • Kitchen • Low pressure**

Lever mixer

- Swivel spout 160°
  - Neoperl® Cascade®
- KWC cartridge M 35
  - with ceramic discs
  - flow rate and temperature continuously variable
- Flexible connection hoses 3/8"
- QuickInstallation - Fastening via threaded connection with locking screws
- Mounting hole size ø35 mm



Flow rate 6 l/min (3 bar)  
Acoustic group I

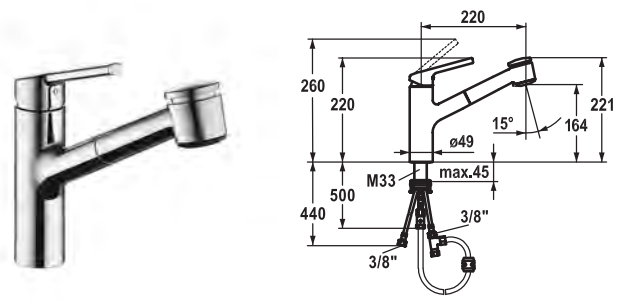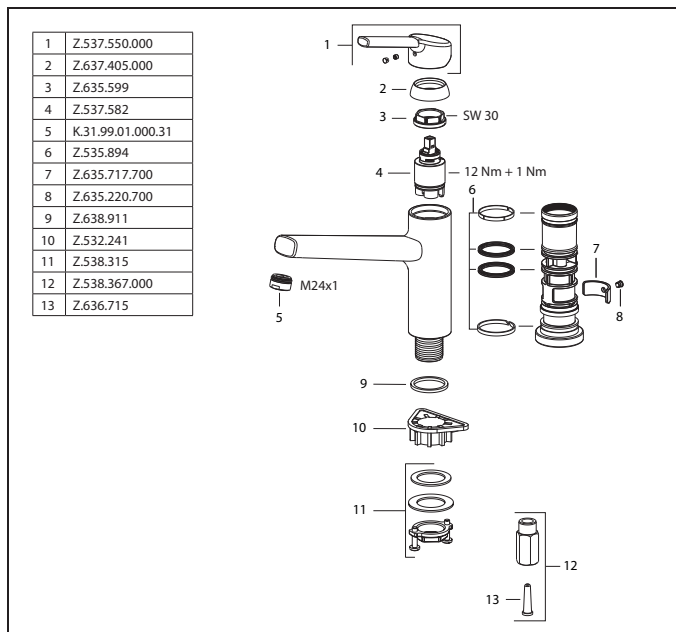

Art.-No.	KWC-No.	FUN
<b>125138</b>	<b>10.445.033.000FL</b>	115.0603.292
all chrome, A 220, flexible connection hoses		


**Lever mixer • Kitchen • Low pressure**


Lever mixer

- TouchProtect - anti-scald protection thanks to the "double skin" principle
- Intrinsically safe against backflow
- Pull-out spray
  - SprayClean - easy to clean and actively prevents limescale buildup
  - up to 600 mm pull-out length
  - PowerClean - needle spray mode, with automatic diverter reset
- Hose guide, swivelling 130°
- EasyLock - a pull-out spray that easily slides back into place
- KWC cartridge M 35
  - with ceramic discs
  - flow rate and temperature continuously variable
- Flexible connection hoses 3/8"
- QuickInstallation - Fastening via threaded connection with locking screws
- Mounting hole size ø35 mm



Flow rate normal spray 7 l/min (3 bar)  
Flow rate needle spray 7 l/min (3 bar)  
Acoustic group I

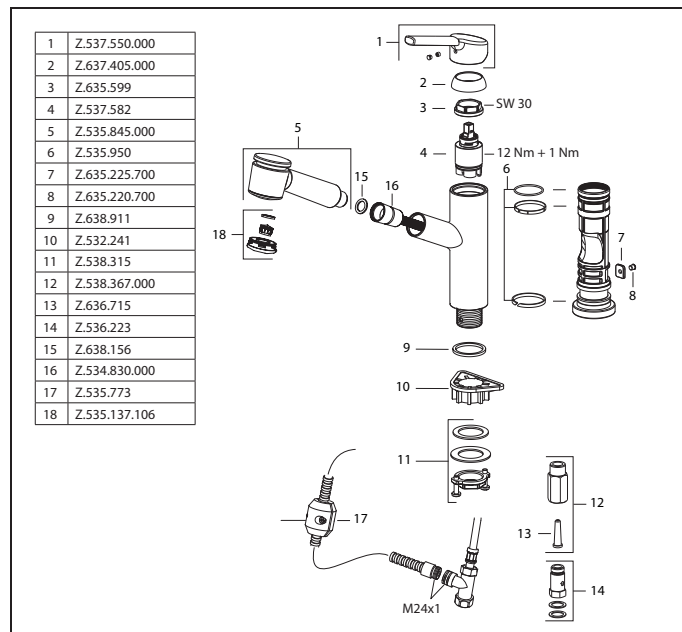

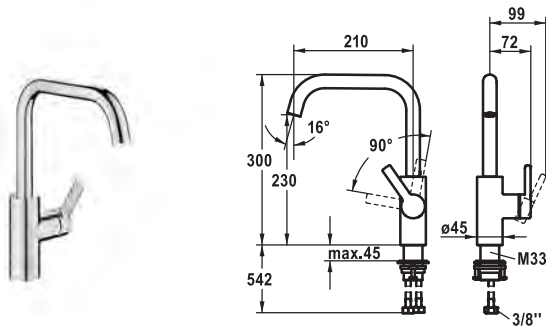



Art.-No.	KWC-No.	FUN
<b>125131</b>	<b>10.441.013.000FL</b>	115.0603.255
all chrome, A 210, flexible connection hoses		

**Lever mixer • Kitchen**

Lever mixer

- Lever installation only possible on the right side
  - Child safety: cold water flow in lever position towards the front
- gap between wall and centre of mounting hole min. 25 mm
- SwivelStop - swivel spout 360°, limitable to 150°
  - Neoperl® Caché®
- KWC cartridge M 35 S
  - with ceramic discs
  - flow rate and temperature continuously variable
- Flexible connection hoses 3/8"
- QuickInstallation - Fastening via threaded connection with locking screws
- Mounting hole size 35 mm

Flow rate 12 l/min (3 bar)  
Acoustic group I

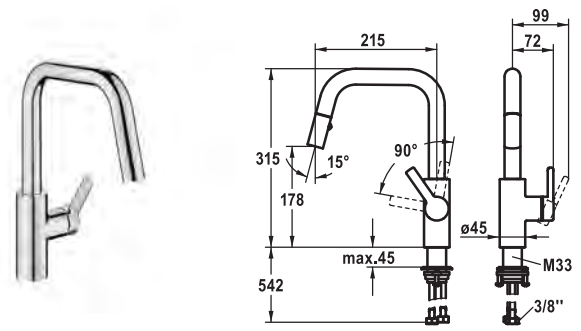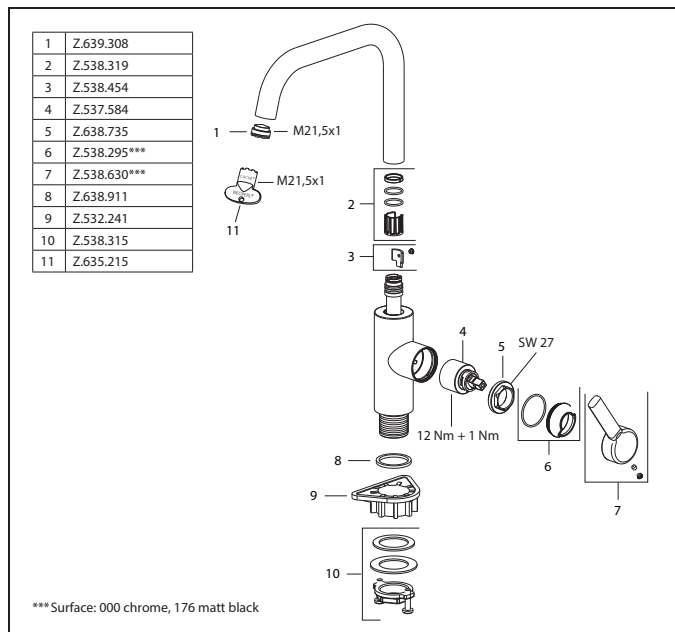


Art.-No.	KWC-No.	FUN
<b>125133</b>	<b>10.441.004.000FL</b>	115.0603.257
all chrome, A 215, flexible connection hoses		


**Lever mixer • Kitchen**

Lever mixer

- Lever installation only possible on the right side
  - Child safety: cold water flow in lever position towards the front
- gap between wall and centre of mounting hole min. 25 mm
- TouchProtect - anti-scald protection thanks to the "double skin" principle
- Pull-out spray
  - Neoperl® Cascade®
  - PowerClean - needle spray mode, with automatic diverter reset
  - up to 400 mm pull-out length
  - black fabric hose
  - QuickConnect - Simple hose connection system
- SwivelStop - hose guide, swivelling 360°, limitable to 150°
- KWC cartridge M 35 S
  - with ceramic discs
  - flow rate and temperature continuously variable
- Flexible connection hoses 3/8"
- QuickInstallation - Fastening via threaded connection with locking screws
- Mounting hole size 35 mm

Flow rate normal spray 8 l/min (3 bar)  
Flow rate needle spray 8 l/min (3 bar)  
Acoustic group I

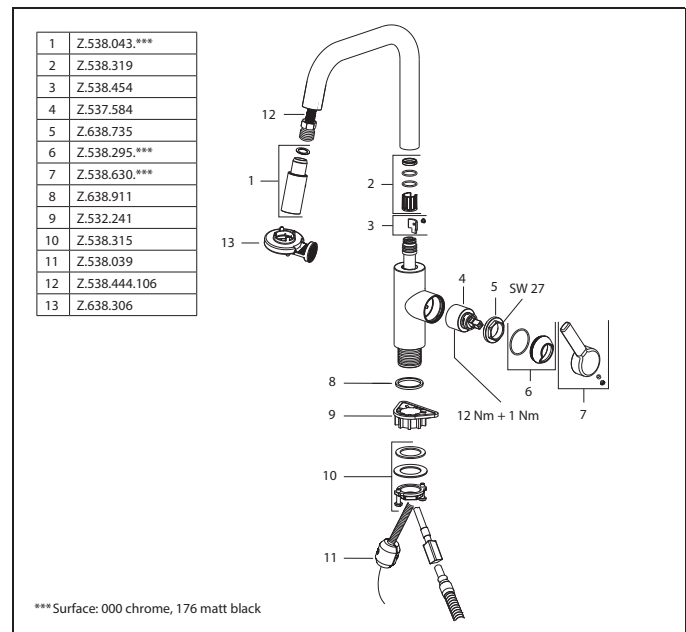

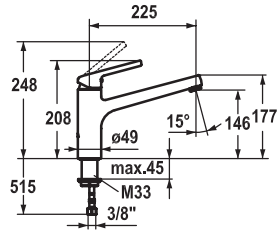



Art.-No.	KWC-No.	FUN
<b>124748</b>	<b>10.441.023.176FL</b>	115.0605.194
matt black, A 225, flexible connection hoses		

### Lever mixer • Kitchen

Lever mixer

- Swivel spout 160°
  - Neoperl® Cascade®
- KWC cartridge M 35
  - with ceramic discs
  - flow rate and temperature continuously variable
- Flexible connection hoses 3/8"
- Fastening by means of threaded sleeve M33 x 1.5
- Mounting hole size  $\varnothing 35$  mm

Flow rate normal spray 11 l/min (3 bar)  
 Flow rate 12 l/min (3 bar)  
 Acoustic group I

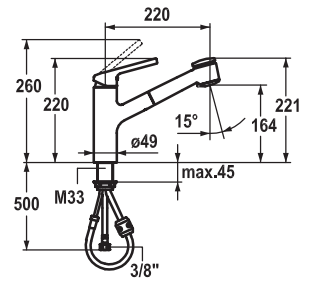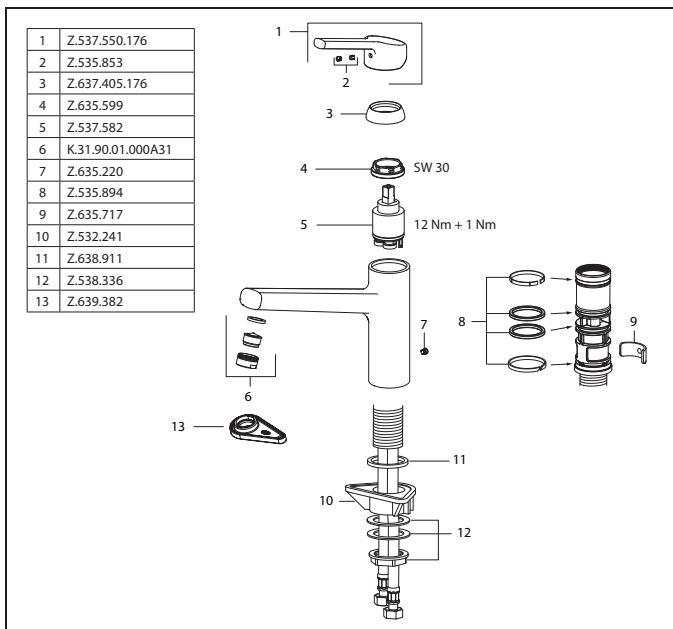


Art.-No.	KWC-No.	FUN
<b>124751</b>	<b>10.441.033.176FL</b>	115.0605.197
matt black, A 220, flexible connection hoses		

### Lever mixer • Kitchen


Lever mixer

- TouchProtect - anti-scald protection thanks to the "double skin" principle
- Pull-out spray
  - SprayClean - easy to clean and actively prevents limescale buildup
  - up to 600 mm pull-out length
  - SprayLock - lockable jet spray
  - PowerClean - needle spray mode, with automatic diverter reset
  - QuickConnect - Simple hose connection system
- Hose guide, swivelling 130°
- EasyLock - a pull-out spray that easily slides back into place
- KWC cartridge M 35
  - with ceramic discs
  - flow rate and temperature continuously variable
- Flexible connection hoses 3/8"
- Fastening by means of threaded sleeve M33 x 1.5
- Mounting hole size  $\varnothing 35$  mm


Flow rate normal spray 10 l/min (3 bar)  
 Flow rate needle spray 10 l/min (3 bar)  
 Acoustic group I

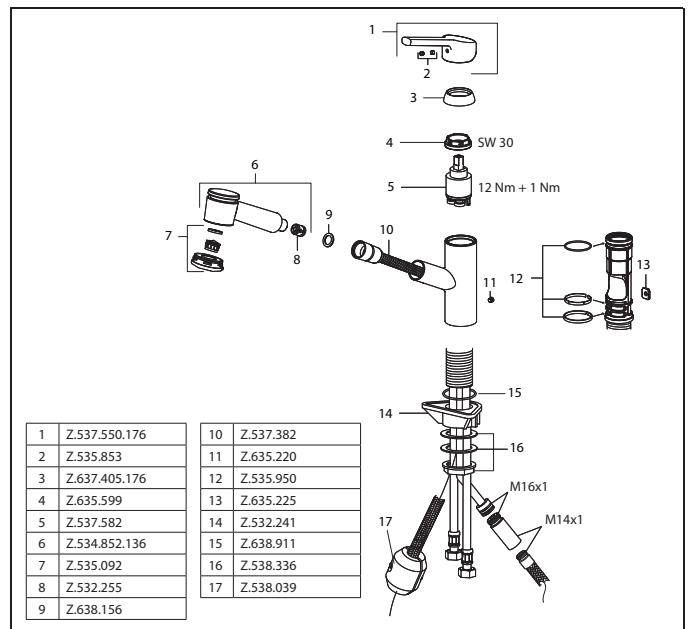



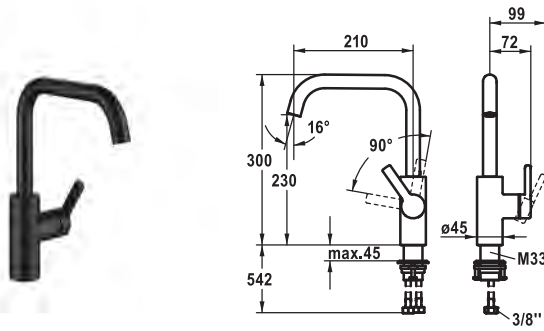

Art.-No.	KWC-No.	FUN
<b>125132</b>	<b>10.441.013.176FL</b>	115.0603.256
matt black, A 210, flexible connection hoses		

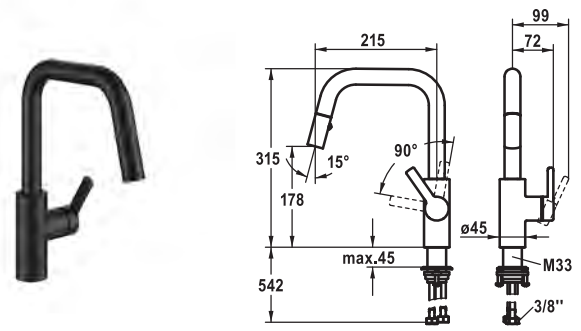


Art.-No.	KWC-No.	FUN
<b>125134</b>	<b>10.441.004.176FL</b>	115.0603.258
matt black, A 215, flexible connection hoses		

**Lever mixer • Kitchen**

Lever mixer

- Lever installation only possible on the right side
  - Child safety: cold water flow in lever position towards the front
- gap between wall and centre of mounting hole min. 25 mm
- SwivelStop - swivel spout 360°, limitable to 150°
  - Neoperl® Caché®
- KWC cartridge M 35 S
  - with ceramic discs
  - flow rate and temperature continuously variable
- Flexible connection hoses 3/8"
- QuickInstallation - Fastening via threaded connection with locking screws
- Mounting hole size ø35 mm

Flow rate 12 l/min (3 bar)  
Acoustic group I

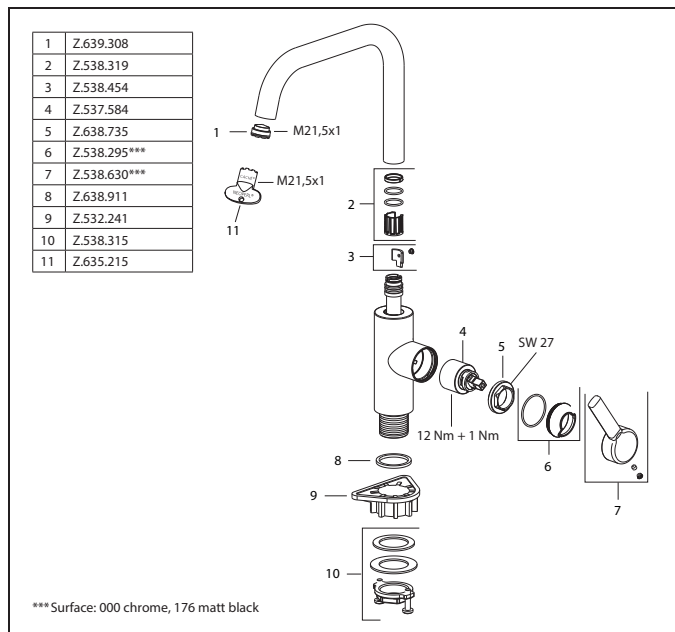



**Lever mixer • Kitchen**

Lever mixer

- Lever installation only possible on the right side
  - Child safety: cold water flow in lever position towards the front
- gap between wall and centre of mounting hole min. 25 mm
- TouchProtect - anti-scald protection thanks to the "double skin" principle
- Pull-out spray
  - Neoperl® Cascade®
  - PowerClean - needle spray mode, with automatic diverter reset
  - up to 400 mm pull-out length
  - black fabric hose
  - QuickConnect - Simple hose connection system
- SwivelStop - hose guide, swivelling 360°, limitable to 150°
- KWC cartridge M 35 S
  - with ceramic discs
  - flow rate and temperature continuously variable
- Flexible connection hoses 3/8"
- QuickInstallation - Fastening via threaded connection with locking screws
- Mounting hole size ø35 mm

Flow rate normal spray 8 l/min (3 bar)  
Flow rate needle spray 8 l/min (3 bar)  
Acoustic group I

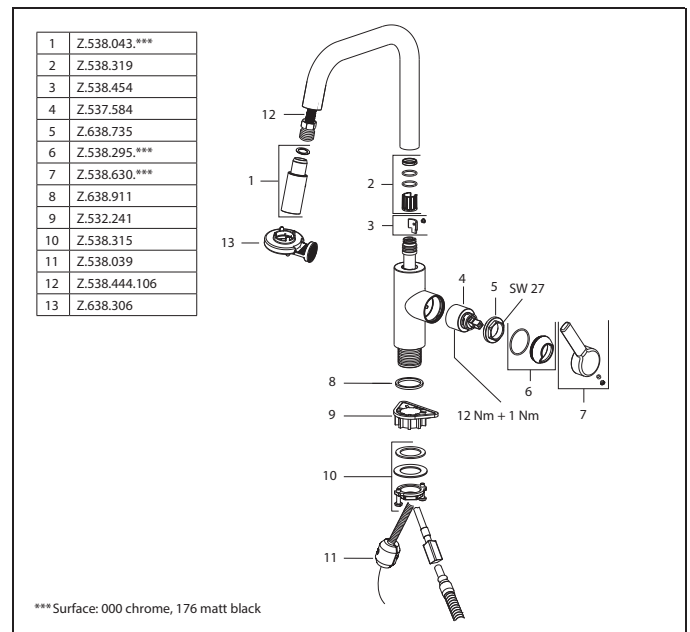

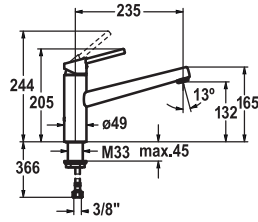



Art.-No.	KWC-No.	FUN
<b>123840</b>	<b>10.441.023.700FL</b>	115.0481.988
stainless steel, A 235, flexible connection hoses		

**Lever mixer • Kitchen**

Lever mixer

- Swivel spout 160°
  - Neoperl® Cascade®
- KWC cartridge M 35
  - with ceramic discs
  - flow rate and temperature continuously variable
- Flexible connection hoses 3/8"
- Fastening by means of threaded sleeve M33 x 1.5
- Mounting hole size ø35 mm

Flow rate normal spray 11 l/min (3 bar)  
 Flow rate 12 l/min (3 bar)  
 Acoustic group I

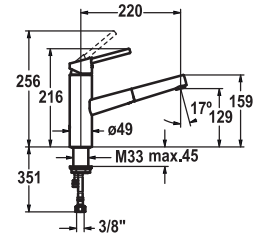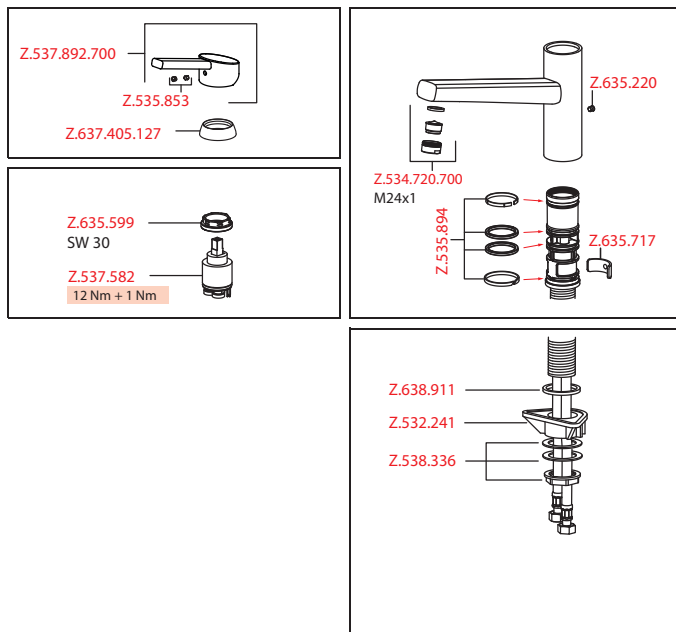


Art.-No.	KWC-No.	FUN
<b>123841</b>	<b>10.441.113.700FL</b>	115.0481.989
stainless steel, A 220, flexible connection hoses		


**Lever mixer • Kitchen**

Lever mixer


- TouchProtect - anti-scald protection thanks to the "double skin" principle
- Pull-out aerator
  - Neoperl® Caché®
  - up to 600 mm pull-out length
- Hose guide, swivelling 130°
- EasyLock - a pull-out spray that easily slides back into place
- KWC cartridge M 35
  - with ceramic discs
  - flow rate and temperature continuously variable
- Flexible connection hoses 3/8"
- Fastening by means of threaded sleeve M33 x 1.5
- Mounting hole size ø35 mm

Flow rate normal spray 9 l/min (3 bar)  
 Flow rate needle spray 9 l/min (3 bar)  
 Acoustic group II

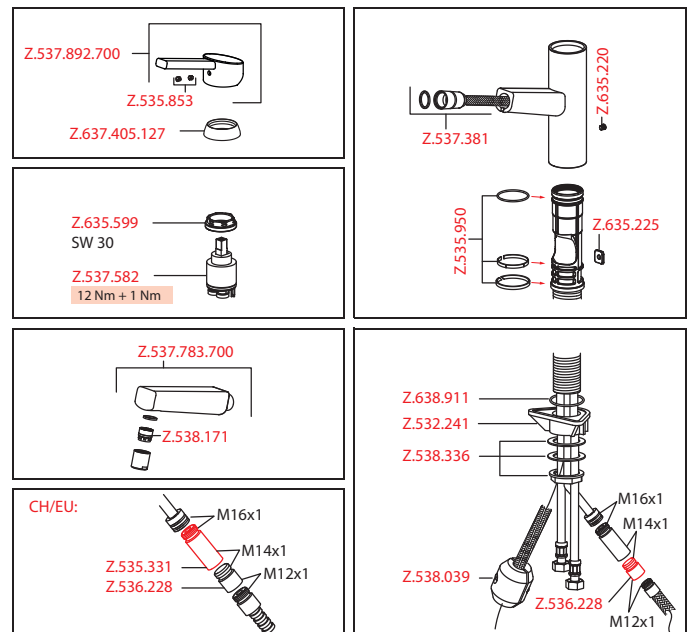

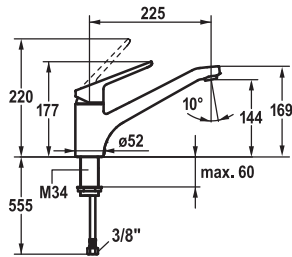

Art.-No.	KWC-No.	FUN
<b>123995</b>	<b>10.371.023.000FL</b>	115.0473.854
all chrome, A 225, flexible connection hoses		

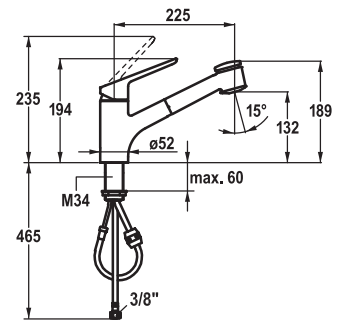


Art.-No.	KWC-No.	FUN
<b>123994</b>	<b>10.371.033.000FL</b>	115.0473.853
all chrome, A 225, flexible connection hoses		

**Lever mixer • Kitchen**

Lever mixer

- Swivel spout 160°
  - Neoperl® Cascade®
- KWC cartridge M 35 H
  - with ceramic discs
  - flow rate and temperature continuously variable
- Flexible connection hoses 3/8"
- Fastening by means of threaded sleeve M34 x 1
- Mounting hole size ø35 mm

Flow rate 14 l/min (3 bar)  
Acoustic group II

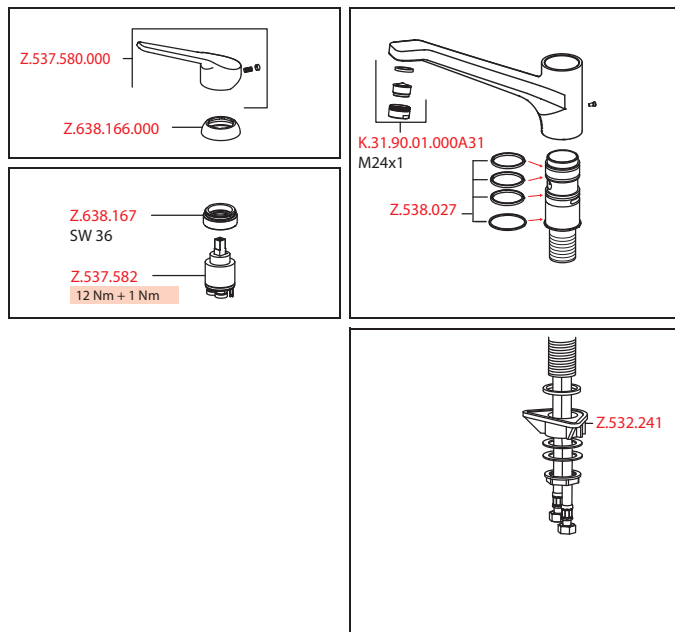



**Lever mixer • Kitchen**

Lever mixer

- TouchProtect - anti-scald protection thanks to the "double skin" principle
- Pull-out spray
  - SprayClean - easy to clean and actively prevents limescale buildup
  - up to 700 mm pull-out length
  - PowerClean - needle spray mode, with automatic diverter reset
  - TwistProtect - 360° swiveling spray
- Hose guide, swivelling 95°
- EasyLock - a pull-out spray that easily slides back into place
- KWC cartridge M 35 S
  - with ceramic discs
  - flow rate and temperature continuously variable
- Flexible connection hoses 3/8"
- Fastening by means of threaded sleeve M34 x 1
- Mounting hole size ø35 mm

Flow rate normal spray 9 l/min (3 bar)  
Flow rate needle spray 9 l/min (3 bar)  
Acoustic group II

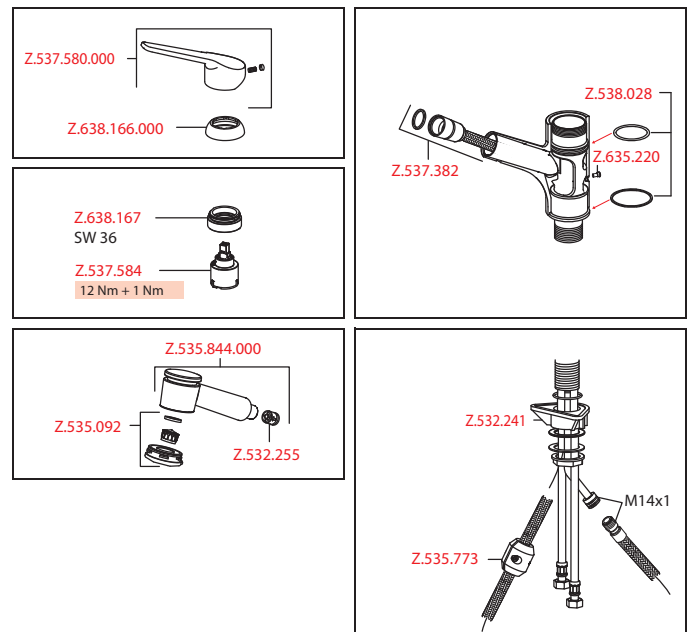

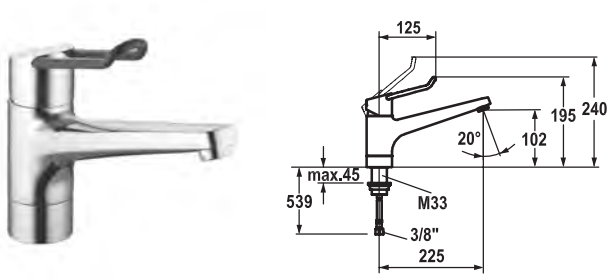



Art.-No.	KWC-No.	FUN
<b>123034</b>	<b>10.291.023.000FL</b>	115.0315.707
all chrome, A 225, flexible connection hoses		

**Lever mixer • Kitchen**

Lever mixer

- ShieldProtect - Tightly sealed
- Operation designed for a secure grip, as well as safe and easy handling
- Ergonomic and robust operating lever, made of polyamide
  - to adjust the handling even better to suit personal requirements, the offset lever can be installed so that it is twisted into the cap (standard: see illustration)
- Swivel spout 160°
  - Neoperl® Perlator®
- KWC cartridge with safety device L 39 - universal
  - with ceramic discs
  - flow rate and temperature continuously variable
  - temperature and flow rate limitation
- Flexible connection hoses 3/8"
- Fastening by means of threaded sleeve M33 x 1.5
- Mounting hole size Ø35 mm

Flow rate 12 l/min (3 bar)  
Acoustic group I

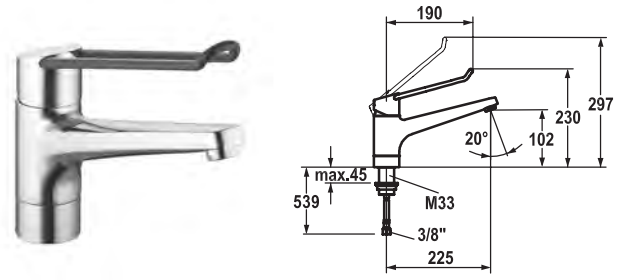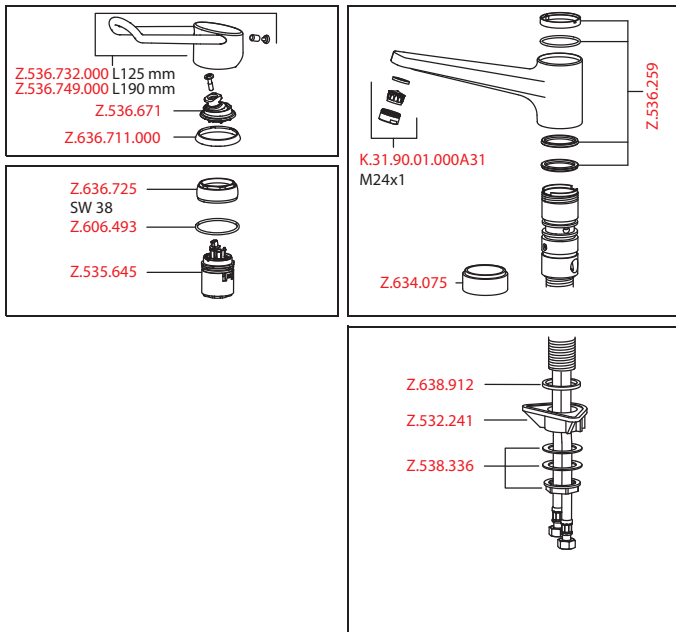


Art.-No.	KWC-No.	FUN
<b>123120</b>	<b>10.291.023.000LLFL</b>	115.0315.709
all chrome, A 225, flexible connection hoses		



**Lever mixer • Kitchen**

Lever mixer

- ShieldProtect - Tightly sealed
- Operation designed for a secure grip, as well as safe and easy handling
- Ergonomic and robust operating lever, made of polyamide
  - to adjust the handling even better to suit personal requirements, the offset lever can be installed so that it is twisted into the cap (standard: see illustration)
- Swivel spout 160°
  - Neoperl® Perlator®
- KWC cartridge with safety device L 39 - universal
  - with ceramic discs
  - flow rate and temperature continuously variable
  - temperature and flow rate limitation
- Flexible connection hoses 3/8"
- Fastening by means of threaded sleeve M33 x 1.5
- Mounting hole size Ø35 mm

Flow rate 12 l/min (3 bar)  
Acoustic group I

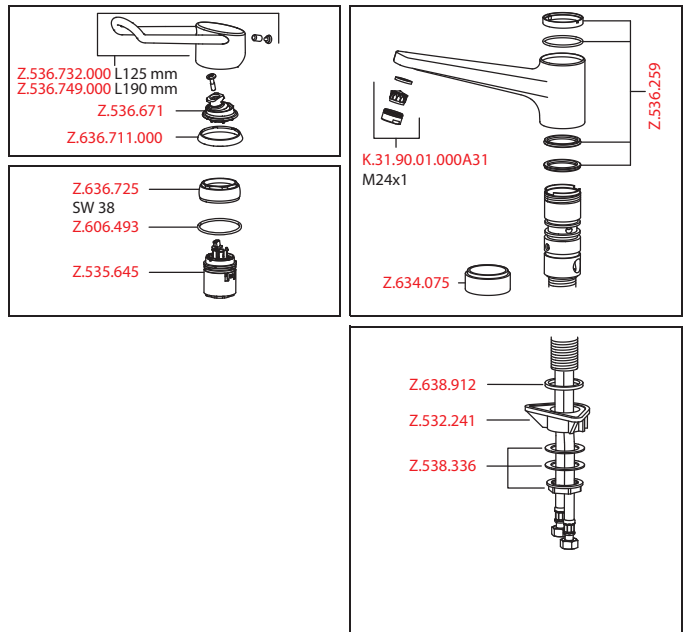

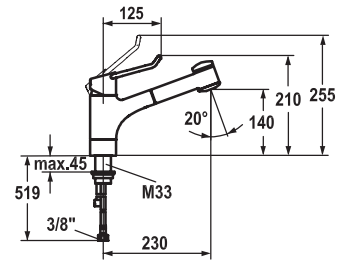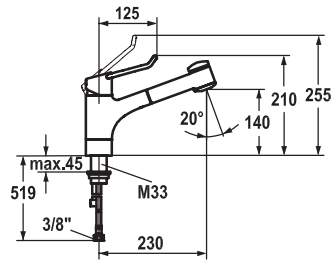

Art.-No.	KWC-No.	FUN
<b>123032</b>	<b>10.291.033.000FL</b>	115.0315.706
all chrome, A 230, flexible connection hoses		

Art.-No.	KWC-No.	FUN
<b>123032</b>	<b>10.291.033.000FL</b>	115.0315.706
all chrome, A 230, flexible connection hoses		

**Lever mixer • Kitchen**

Lever mixer

- ShieldProtect - Tightly sealed
- Operation designed for a secure grip, as well as safe and easy handling
- Ergonomic and robust operating lever, made of polyamide
  - to adjust the handling even better to suit personal requirements, the offset lever can be installed so that it is twisted into the cap (standard: see illustration)
- TouchProtect - anti-scald protection thanks to the “double skin” principle
- Pull-out spray
  - SprayClean - easy to clean and actively prevents limescale buildup
  - up to 700 mm pull-out length
  - SprayLock - lockable jet spray
  - PowerClean - needle spray mode, with automatic diverter reset
  - hose surface to fit faucet surface
- Hose guide, swivelling 130°
- KWC cartridge with safety device L 39 - universal
  - with ceramic discs
  - flow rate and temperature continuously variable
  - temperature and flow rate limitation
- Flexible connection hoses 3/8"
- Fastening by means of threaded sleeve M33 x 1.5
- Mounting hole size ø35 mm

Flow rate normal spray 12 l/min (3 bar)

Flow rate needle spray 12 l/min (3 bar)

Acoustic group I

**Lever mixer • Kitchen**















Lever mixer


- ShieldProtect - Tightly sealed
- Operation designed for a secure grip, as well as safe and easy handling
- Ergonomic and robust operating lever, made of polyamide
  - to adjust the handling even better to suit personal requirements, the offset lever can be installed so that it is twisted into the cap (standard: see illustration)
- TouchProtect - anti-scald protection thanks to the “double skin” principle
- Pull-out spray
  - SprayClean - easy to clean and actively prevents limescale buildup
  - up to 700 mm pull-out length
  - SprayLock - lockable jet spray
  - PowerClean - needle spray mode, with automatic diverter reset
  - hose surface to fit faucet surface
- Hose guide, swivelling 130°
- KWC cartridge with safety device L 39 - universal
  - with ceramic discs
  - flow rate and temperature continuously variable
  - temperature and flow rate limitation
- Flexible connection hoses 3/8"
- Fastening by means of threaded sleeve M33 x 1.5
- Mounting hole size ø35 mm

Flow rate normal spray 12 l/min (3 bar)

Flow rate needle spray 12 l/min (3 bar)

Acoustic group I

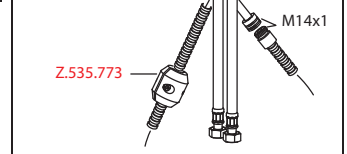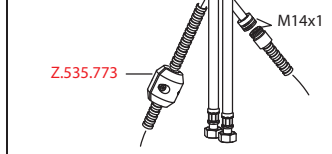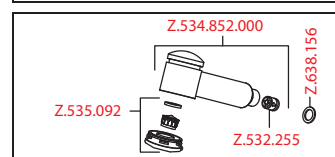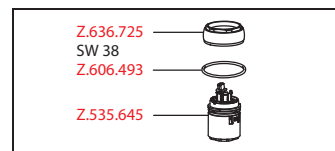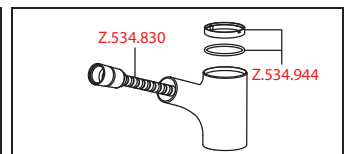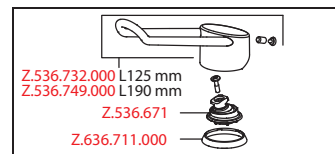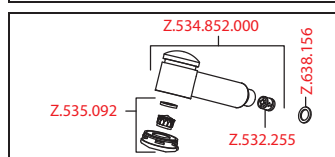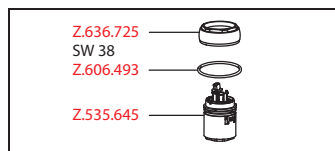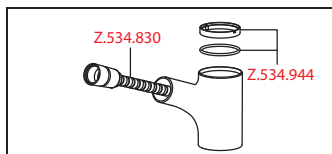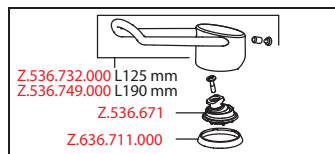


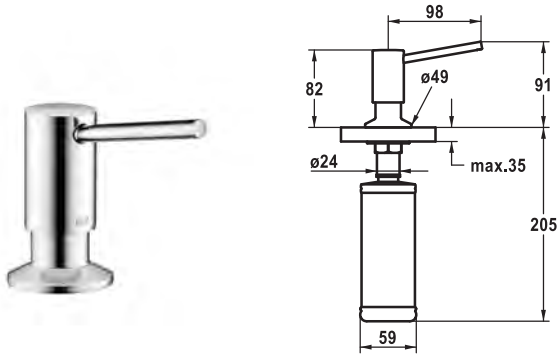

Art.-No.	KWC-No.	FUN
<b>538409</b>	<b>Z.538.409.000</b>	112.0605.207
all chrome		

### Soap dispenser KWC BASIC


- Easily refillable from top without disassembly
- Mounting hole size  $\varnothing 26$  mm
- Scope of delivery:
  - Pump
  - Soap container, filling capacity 320 ml Z.639.549

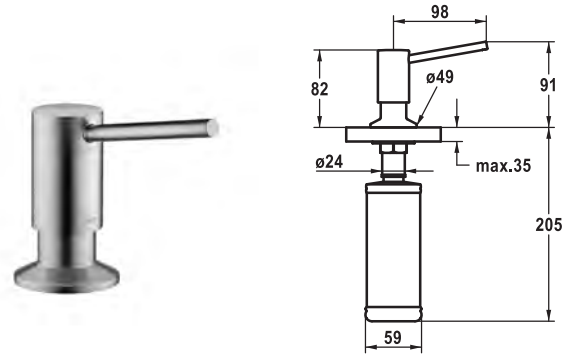

Art.-No.	KWC-No.	FUN
<b>538411</b>	<b>Z.538.409.177</b>	112.0605.209
brushed steel		

### Soap dispenser KWC BASIC


- Easily refillable from top without disassembly
- Mounting hole size  $\varnothing 26$  mm
- Scope of delivery:
  - Pump
  - Soap container, filling capacity 320 ml Z.639.549

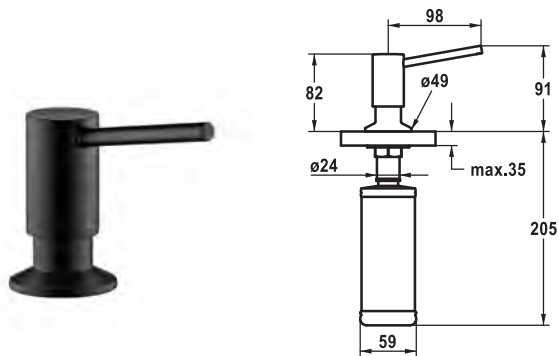

Art.-No.	KWC-No.	FUN
<b>538410</b>	<b>Z.538.409.176</b>	112.0605.208
matt black		

### Soap dispenser KWC BASIC


- Easily refillable from top without disassembly
- Mounting hole size  $\varnothing 26$  mm
- Scope of delivery:
  - Pump
  - Soap container, filling capacity 320 ml Z.639.549

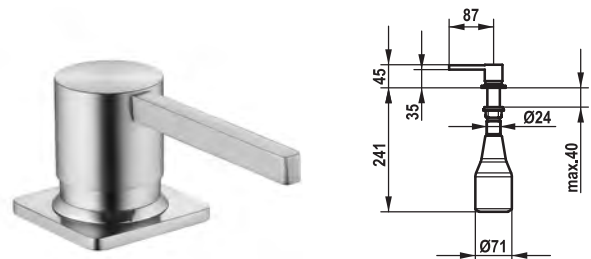

Art.-No.	KWC-No.	FUN
<b>538038</b>	<b>Z.538.038.700</b>	119.0517.935
stainless steel		

### Soap dispenser KWC ERA


- Easily refillable from top without disassembly
- Mounting hole size  $\varnothing 26$  mm
- Scope of delivery:
  - Pump
  - Soap container, filling capacity 350 ml Z.538.053

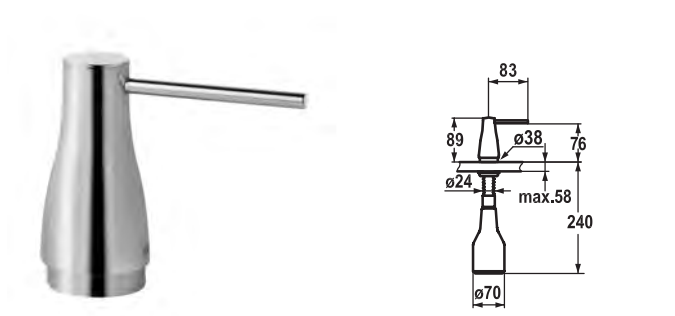

Art.-No.	KWC-No.	FUN
<b>536063</b>	<b>Z.536.063.000</b>	119.0307.870
all chrome		
<b>536064</b>	<b>Z.536.063.700</b>	119.0307.901
stainless steel		

**Soap dispenser KWC EVE**


- Easily refillable from top without disassembly
- Mounting hole size  $\varnothing 26$  mm
- Scope of delivery:
  - Pump
  - Soap container, filling capacity 350 ml Z.635.713
- To be ordered separately (optional or if necessary):
  - Escutcheon Z.536.291.000 or Z.536.292.700

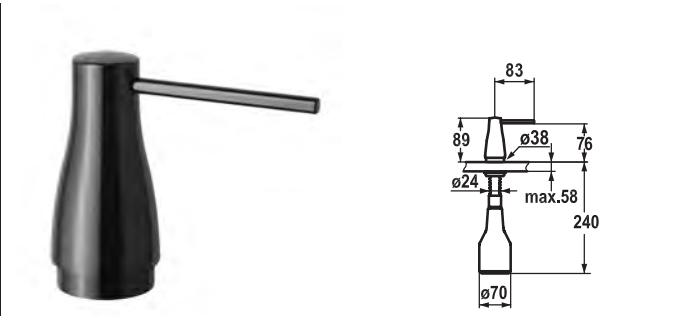

Art.-No.	KWC-No.	FUN
<b>536263</b>	<b>Z.536.063.151</b>	119.0308.349
black chrome-plated		

**Soap dispenser KWC EVE**


- Easily refillable from top without disassembly
- Mounting hole size  $\varnothing 26$  mm
- Scope of delivery:
  - Pump
  - Soap container, filling capacity 350 ml Z.635.713
- To be ordered separately (optional or if necessary):
  - Escutcheon Z.536.291.000 or Z.536.292.700

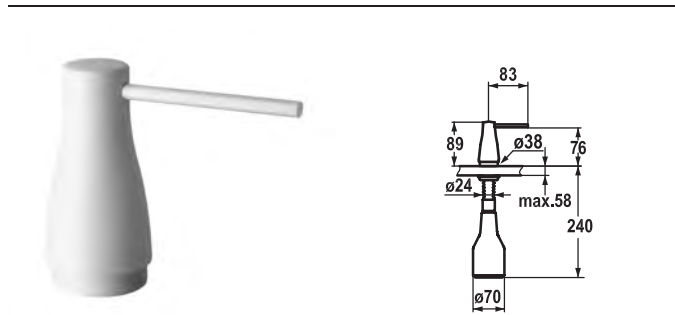

Art.-No.	KWC-No.	FUN
<b>536262</b>	<b>Z.536.063.150</b>	119.0308.348
glacier white		

**Soap dispenser KWC EVE**


- Easily refillable from top without disassembly
- Mounting hole size  $\varnothing 26$  mm
- Scope of delivery:
  - Pump
  - Soap container, filling capacity 350 ml Z.635.713
- To be ordered separately (optional or if necessary):
  - Escutcheon Z.536.291.000 or Z.536.292.700

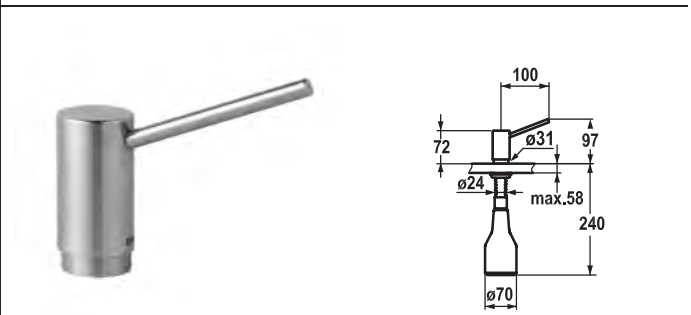

Art.-No.	KWC-No.	FUN
<b>536062</b>	<b>Z.536.062.700</b>	119.0310.326
stainless steel		

**Soap dispenser KWC INOX**


- Easily refillable from top without disassembly
- Mounting hole size  $\varnothing 26$  mm
- Scope of delivery:
  - Pump
  - Soap container, filling capacity 350 ml Z.635.713

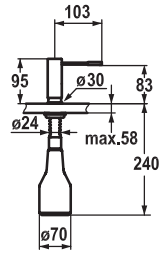

Art.-No.	KWC-No.	FUN
<b>536060</b>	<b>Z.536.060.000</b>	119.0307.908
all chrome		
<b>536061</b>	<b>Z.536.060.700</b>	119.0308.343
stainless steel		

### Soap dispenser KWC ONO


- Easily refillable from top without disassembly
- Mounting hole size  $\varnothing 26$  mm
- Scope of delivery:
  - Pump
  - Soap container, filling capacity 350 ml Z.635.713
- To be ordered separately (optional or if necessary):
  - Escutcheon Z.536.291.000 or Z.536.292.700

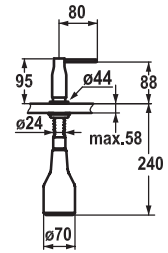

Art.-No.	KWC-No.	FUN
<b>536332</b>	<b>Z.536.332.000</b>	119.0308.350
all chrome		

### Soap dispenser KWC SIN


- Easily refillable from top without disassembly
- Mounting hole size  $\varnothing 26$  mm
- Scope of delivery:
  - Pump
  - Soap container, filling capacity 350 ml Z.635.713



Art.-No.	KWC-No.	FUN
<b>536109</b>	<b>Z.536.109.000</b>	119.0307.927
all chrome		

### Soap dispenser KWC PRIMO

- Easily refillable from top without disassembly
- Mounting hole size  $\varnothing 26$  mm
- Scope of delivery:
  - Pump
  - Soap container, filling capacity 350 ml Z.635.713




Art.-No.	KWC-No.	FUN
<b>536586</b>	<b>Z.536.586.000</b>	119.0308.341
all chrome		
<b>536587</b>	<b>Z.536.586.127</b>	119.0308.352
decor steel		

### Soap dispenser KWC ZOE

- Easily refillable from top without disassembly
- Mounting hole size  $\varnothing 26$  mm
- Scope of delivery:
  - Pump
  - Soap container, filling capacity 350 ml Z.635.713
- To be ordered separately (optional or if necessary):
  - Escutcheon Z.536.291.000 or Z.536.292.700






Art.-No.	KWC-No.	FUN
<b>538345</b>	<b>Z.536.586.176</b>	119.0583.600
matt black		

**Soap dispenser KWC ZOE**

- Easily refillable from top without disassembly
- Mounting hole size  $\varnothing 26$  mm
- Scope of delivery:
  - Pump
  - Soap container, filling capacity 350 ml Z.635.713
- To be ordered separately (optional or if necessary):
  - Escutcheon Z.536.291.000 or Z.536.292.700

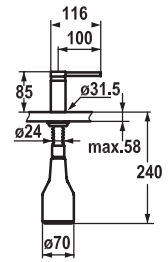


Art.-No.	KWC-No.	FUN
<b>536159</b>	<b>Z.536.159.000</b>	119.0200.126
all chrome		
<b>536177</b>	<b>Z.536.159.127</b>	119.0308.347
decor steel		
<b>538981</b>	<b>Z.536.159.176</b>	
matt black		

**Soap dispenser KWC AVA**

- Easily refillable from top without disassembly
- Mounting hole size  $\varnothing 26$  mm
- Scope of delivery:
  - Pump
  - Soap container, filling capacity 350 ml Z.635.713


**NEW**



Art.-No.	KWC-No.	FUN
<b>536932</b>	<b>Z.536.586.150</b>	119.0340.011
glacier white		

**Soap dispenser KWC ZOE**

- Easily refillable from top without disassembly
- Mounting hole size  $\varnothing 26$  mm
- Scope of delivery:
  - Pump
  - Soap container, filling capacity 350 ml Z.635.713
- To be ordered separately (optional or if necessary):
  - Escutcheon Z.536.291.000 or Z.536.292.700

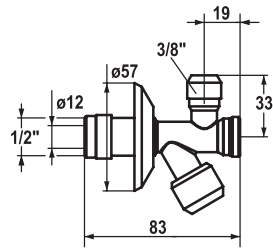

Art.-No.	KWC-No.	FUN
<b>536576</b>	<b>Z.536.576.000</b>	112.0315.872
all chrome		

### Shut-off valve


Shut-off valve with filter

- Connecting thread 1/2"
- Compression fitting length compensation for copper tube





# Faucets commercial kitchen

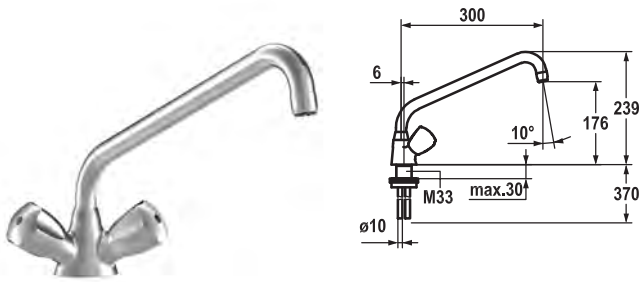



Art.-No.	KWC-No.	FUN
<b>112159</b>	<b>K.24.41.24.000C02</b>	115.0315.633
all chrome, A 300		

**Two-handle mixer • Commercial kitchen**

Two-handle mixer

- KWC CORONA metal handles, removable
- Swivel spout 160°
  - Jet regulator
- Flat valves M20 x 1.25
  - stainless steel valve seat
- Copper tubes ø10 mm
- Fastening by means of threaded sleeve M33 x 1.5
- Mounting hole size ø35 mm

Flow rate 60 l/min (3 bar)  
Acoustic group U

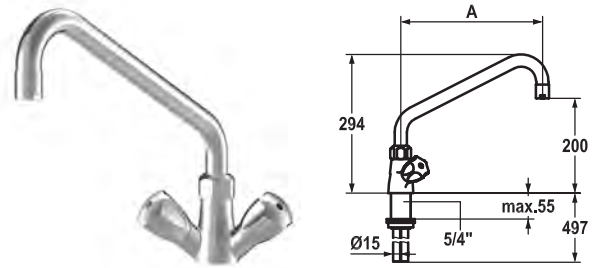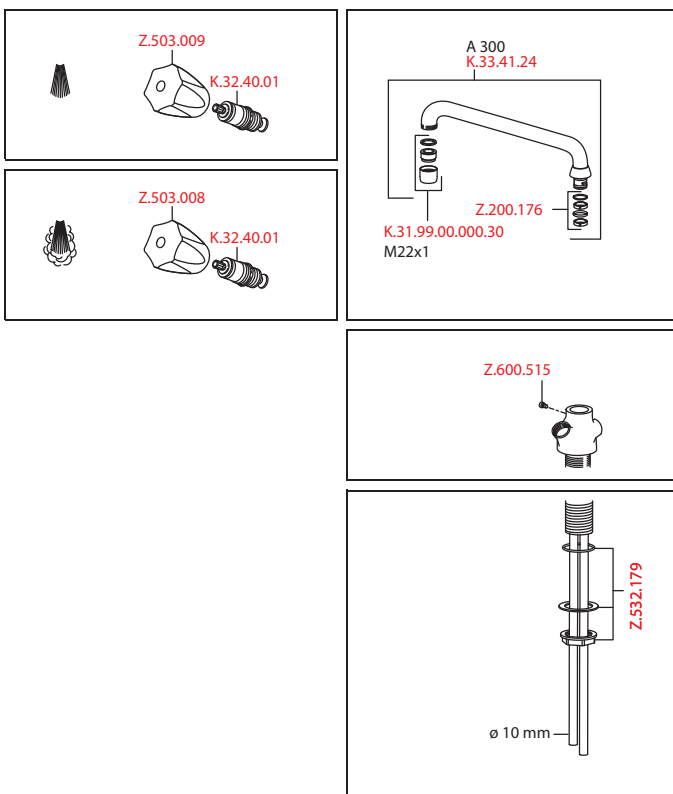


Art.-No.	KWC-No.	FUN
<b>100945</b>	<b>K.24.41.04.000C07</b>	115.0315.624
all chrome, A 300		
<b>100947</b>	<b>K.24.41.06.000C07</b>	115.0315.625
all chrome, A 450		


**Two-handle mixer • Commercial kitchen**

Two-handle mixer

- KWC CORONA metal handles, removable
- Swivel spout 360°
  - with adjustable gland
  - Jet regulator
- OptimalSpace - ample space for washing or working
- Flat valves M20 x 1.25
  - stainless steel valve seat
- Copper tubes ø15 mm
- Fastening by means of threaded sleeve 1 1/4"
- Mounting hole size ø42 mm

Flow rate 65 l/min (3 bar)  
Acoustic group II

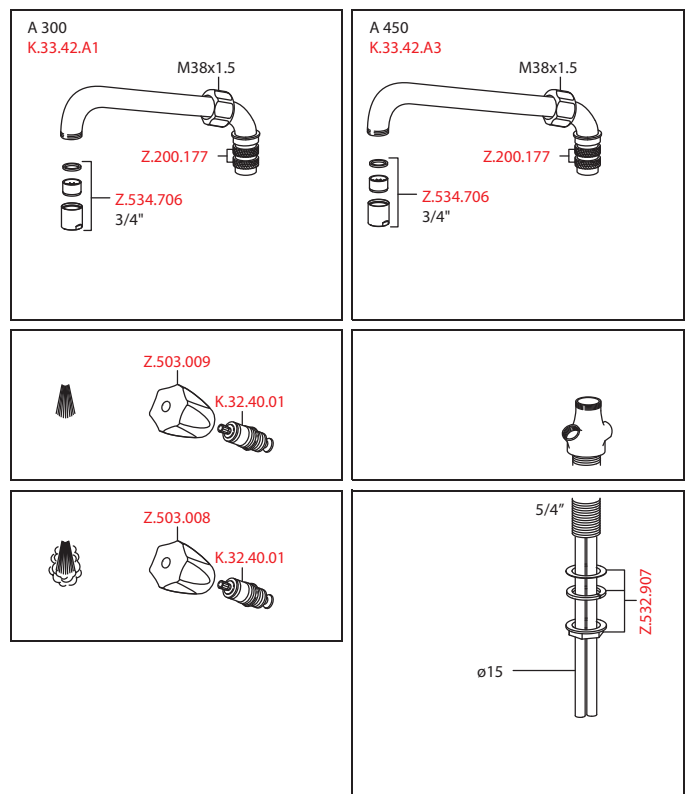


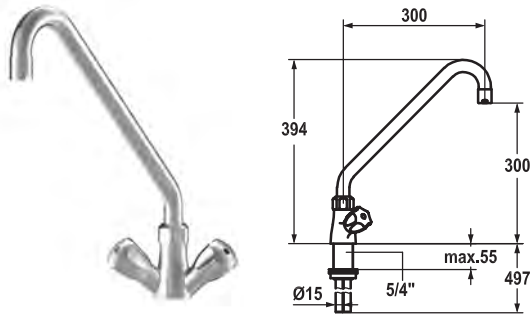


Art.-No.	KWC-No.	FUN
<b>101755</b>	<b>K.24.41.A2.000C07</b>	115.0315.665
all chrome, A 300, B 300, C 394		

**Two-handle mixer • Commercial kitchen**

- Two-handle mixer
- KWC CORONA metal handles, removable
  - Swivel spout 360°
    - with adjustable gland
    - Jet regulator
  - OptimalSpace - ample space for washing or working
  - Flat valves M20 x 1.25
    - stainless steel valve seat
  - Copper tubes ø15 mm
  - Fastening by means of threaded sleeve 1 1/4"
  - Mounting hole size ø42 mm

Flow rate 98 l/min (3 bar)  
Acoustic group U

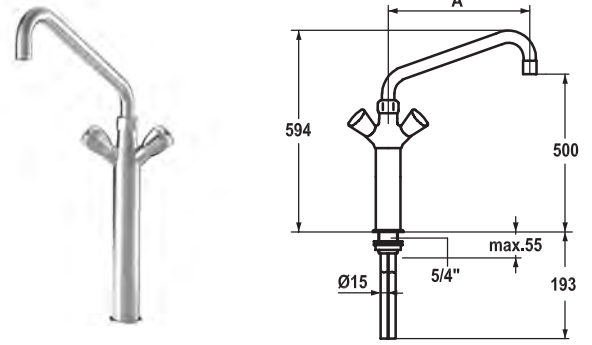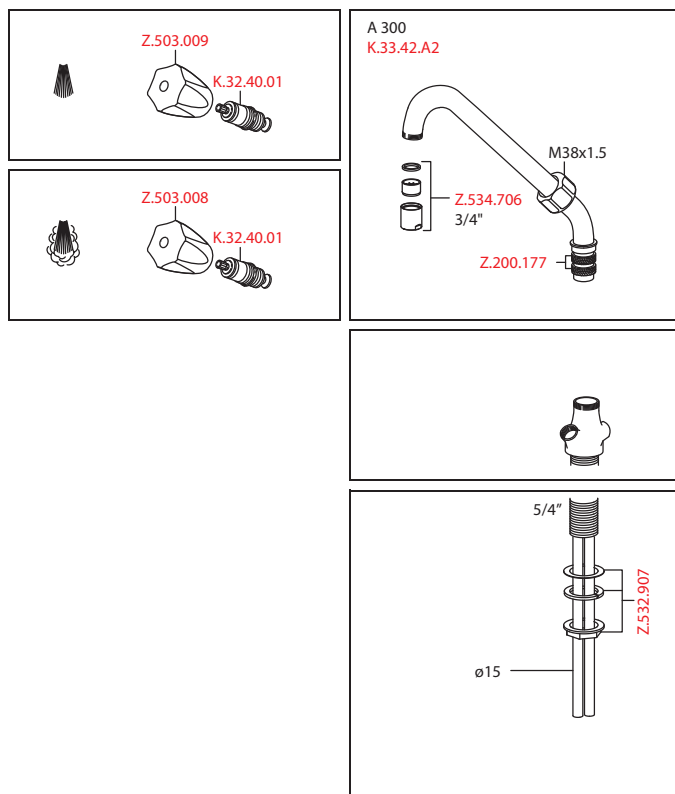



Art.-No.	KWC-No.	FUN
<b>112149</b>	<b>K.24.41.20.000C07</b>	115.0315.668
all chrome, A 300		
<b>112150</b>	<b>K.24.41.21.000C07</b>	115.0315.669
all chrome, A 450		

**Two-handle mixer • Commercial kitchen**

- Two-handle mixer
- Pillar 300 mm
  - KWC CORONA metal handles, removable
  - Swivel spout 360°
    - with adjustable gland
    - Jet regulator
  - OptimalSpace - ample space for washing or working
  - Flat valves M20 x 1.25
    - stainless steel valve seat
  - Copper tubes ø15 mm
  - Fastening by means of threaded sleeve 1 1/4"
  - Mounting hole size ø42 mm

Flow rate 98 l/min (3 bar)  
Acoustic group U

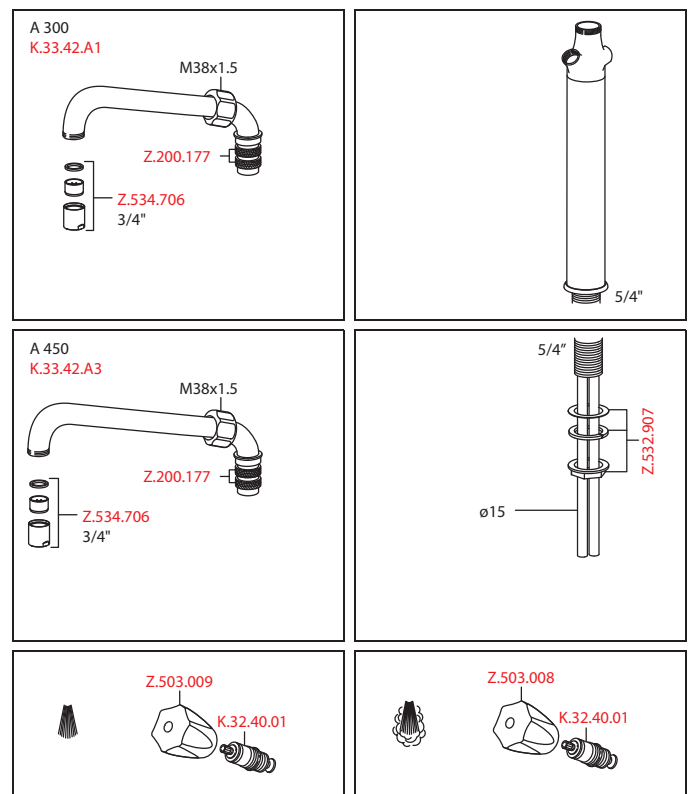

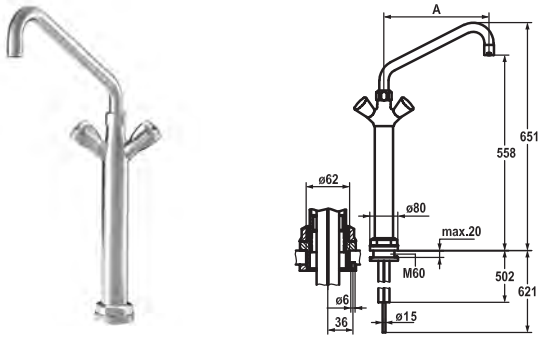



Art.-No.	KWC-No.	FUN
<b>100931</b>	<b>K.24.41.32.000C07</b>	115.0315.622
all chrome, A 300		
<b>100933</b>	<b>K.24.41.34.000C07</b>	115.0315.623
all chrome, A 450		

**Two-handle mixer • Commercial kitchen**

Two-handle mixer

- Pillar 300 mm
- KWC CORONA metal handles, removable
- Automatic outlet draining
- Preassembled socket
- Swivel spout 360°
  - with adjustable gland
  - Jet regulator
- OptimalSpace - ample space for washing or working
- Flat valves M20 x 1.25
  - stainless steel valve seat
- Copper tubes ø15 mm
- Mounting hole size ø62 mm

Flow rate 60 l/min (3 bar)  
Acoustic group U

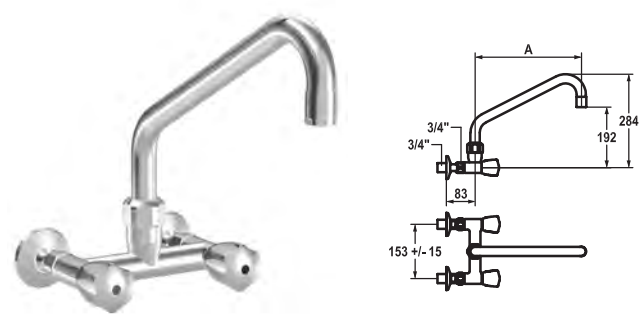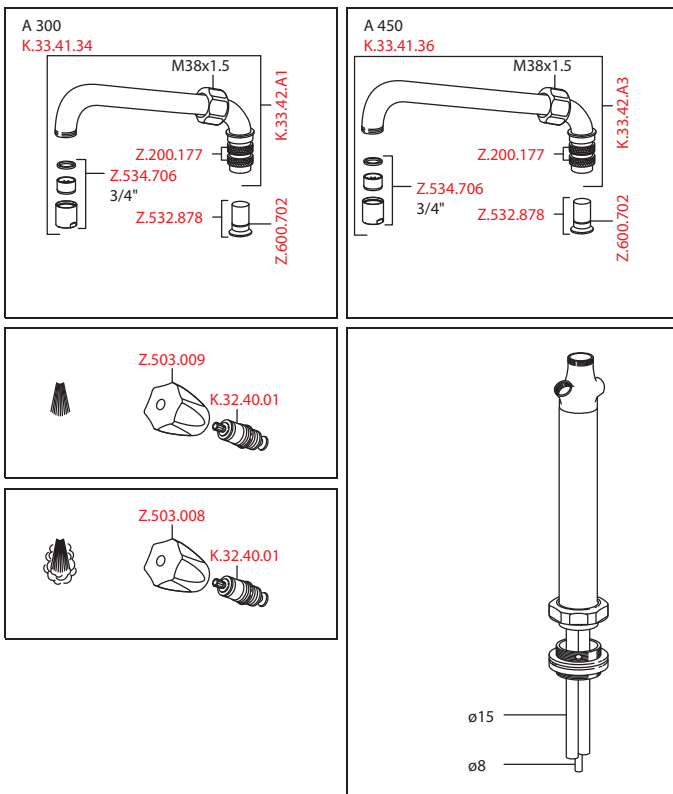


Art.-No.	KWC-No.	FUN
<b>118403</b>	<b>K.24.42.21.000C86</b>	115.0315.637
all chrome, AD 153 +/- 15 mm, A 300		
<b>118406</b>	<b>K.24.42.24.000C86</b>	115.0315.638
all chrome, AD 153 +/- 15 mm, A 450		

**Two-handle mixer • Commercial kitchen**

Two-handle mixer

- KWC CORONA metal handles, removable
- Swivel spout
  - with adjustable gland
  - Jet regulator
- OptimalSpace - ample space for washing or working
- Flat valves M20 x 1.25
  - stainless steel valve seat
- Wall connections 3/4" x 3/4", with shut-off valve L 40 eccentric 7.5 mm

Flow rate 120 l/min (3 bar)  
Acoustic group U

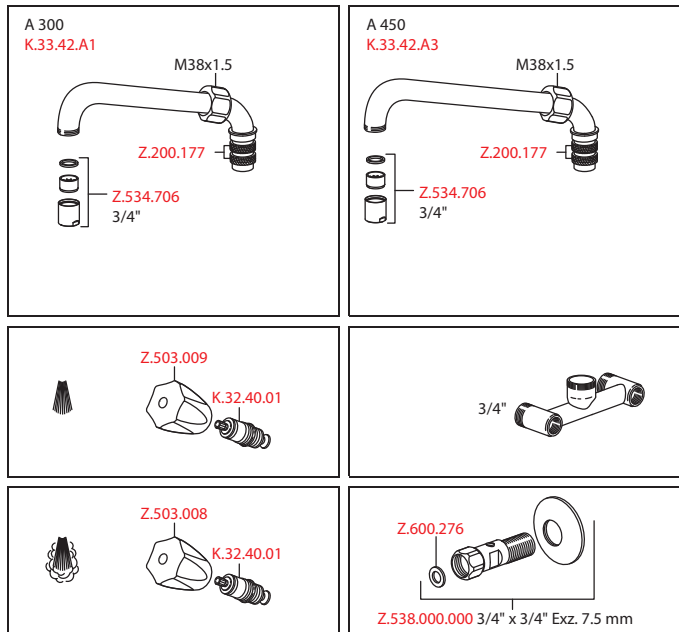











Art.-No.	KWC-No.	FUN
<b>118404</b>	<b>K.24.42.22.000C74</b>	115.0315.676
all chrome, AD 153, A 300		

**Two-handle mixer • Commercial kitchen**

- Two-handle mixer
- KWC CORONA metal handles, removable
  - Swivel spout
    - with adjustable gland
    - Jet regulator
  - OptimalSpace - ample space for washing or working
  - Flat valves M20 x 1.25
    - stainless steel valve seat
  - Wall connections 3/4" x 3/4", without shut-off valve L 160

Flow rate 120 l/min (3 bar)  
Acoustic group U

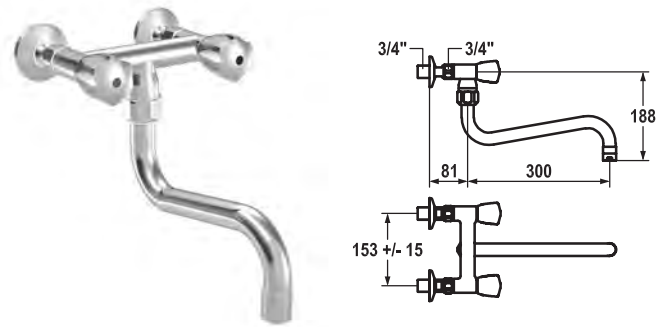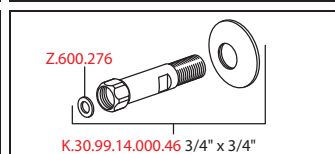



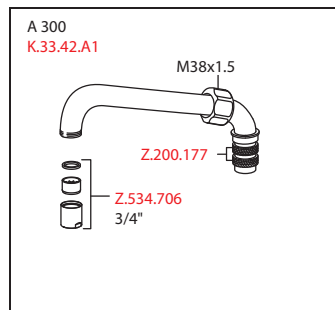



Art.-No.	KWC-No.	FUN
<b>118391</b>	<b>K.24.42.11.000C86</b>	115.0315.634
all chrome, AD 153 +/- 15 mm, A 300		

**Two-handle mixer • Commercial kitchen**

- Two-handle mixer
- KWC CORONA metal handles, removable
  - Swivel spout
    - with adjustable gland
    - Jet regulator
  - OptimalSpace - ample space for washing or working
  - Flat valves M20 x 1.25
    - stainless steel valve seat
  - Wall connections 3/4" x 3/4", with shut-off valve L 40 eccentric 7.5 mm

Flow rate 120 l/min (3 bar)  
Acoustic group U

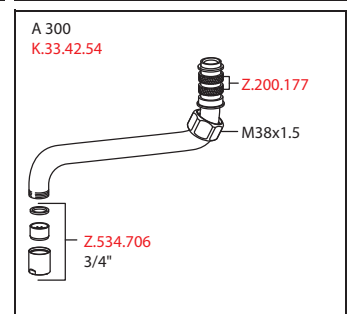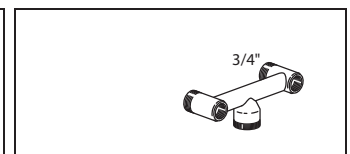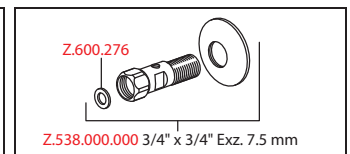

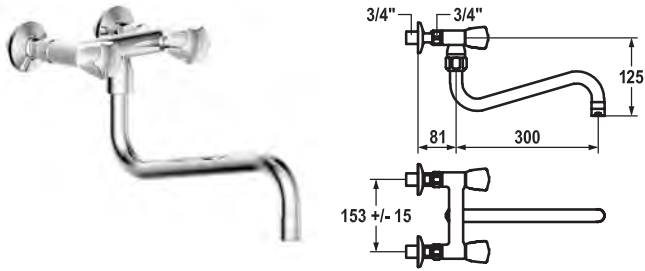


Art.-No.	KWC-No.	FUN
<b>124036</b>	<b>K.24.42.13.000C86</b>	115.0493.133
all chrome, AD 153 +/- 15 mm, A 300		

**Commercial kitchen**

- Two-handle mixer
- KWC CORONA metal handles, removable
  - Swivel spout
    - with adjustable gland
    - Jet regulator
  - OptimalSpace - ample space for washing or working
  - Flat valves M20 x 1.25
    - stainless steel valve seat
  - Wall connections 3/4" x 3/4", with shut-off valve L 40 eccentric 7.5 mm

Flow rate 120 l/min (3 bar)  
Acoustic group U

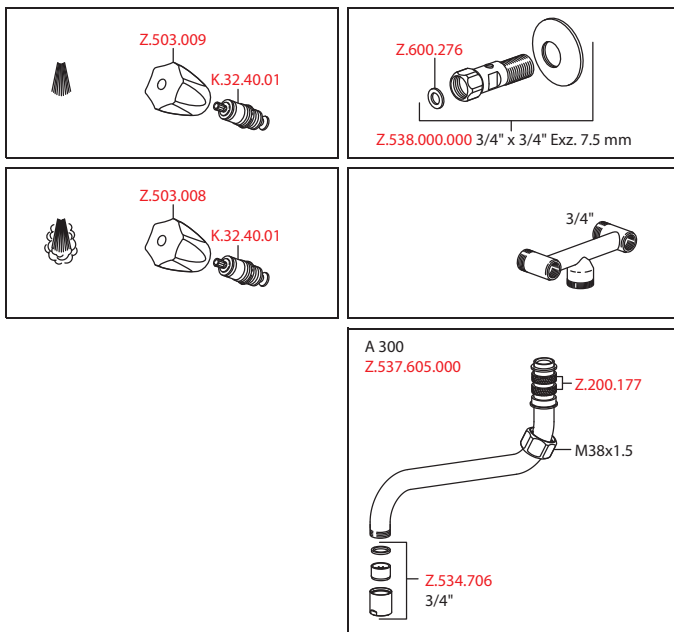



Art.-No.	KWC-No.	FUN
<b>118397</b>	<b>K.24.42.17.000C86</b>	115.0315.635
all chrome, AD 153 +/- 15 mm, G 3/4"		
<b>118401</b>	<b>K.24.42.19.000C86</b>	115.0315.636
all chrome, AD 153 +/- 15 mm, G 3/4" x DN 20		

**Two-handle mixer • Commercial kitchen**

- Two-handle mixer
- KWC CORONA metal handles, removable
  - Intrinsically safe against backflow
  - Threaded outlet for hose connection
  - OptimalSpace - ample space for washing or working
  - Flat valves M20 x 1.25
    - stainless steel valve seat
  - Wall connections 3/4" x 3/4", with shut-off valve L 40 eccentric 7.5 mm

Flow rate 60 l/min (3 bar)  
Acoustic group U

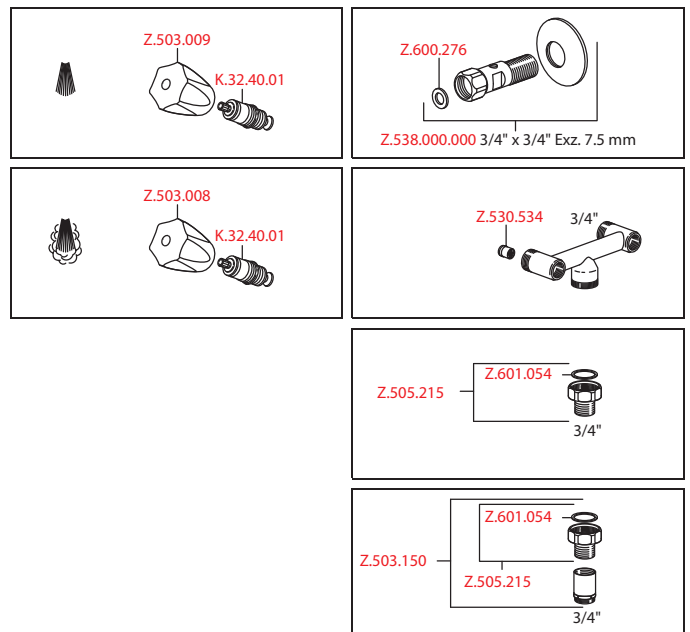

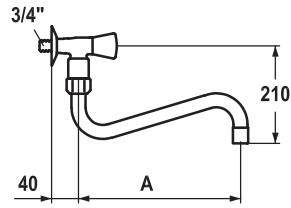


Art.-No.	KWC-No.	FUN
<b>100916</b>	<b>K.25.40.14.000C35</b>	115.0315.659
all chrome, A 300		
<b>100917</b>	<b>K.25.40.16.000C35</b>	115.0315.660
all chrome, A 450		

**Commercial kitchen • Wall mounted valve**

- Wall mounted valve
- KWC CORONA metal handle, removable (cold water)
  - Swivel spout
    - with adjustable gland
    - Jet regulator
  - OptimalSpace - ample space for washing or working
  - Flat valves M20 x 1.25
    - stainless steel valve seat
  - Connecting thread 3/4"

Flow rate 86 l/min (3 bar)  
Acoustic group U

<p>Z.606.622</p> <p>3/4"</p> <p>M38 x 1</p>	<p>Z.503.009</p> <p>K.32.40.01</p>
<p>A 300</p> <p>K.33.42.54</p> <p>Z.200.177</p> <p>M38x1.5</p> <p>Z.534.706</p> <p>3/4"</p>	<p>A 450</p> <p>K.33.42.56</p> <p>Z.200.177</p> <p>M38x1.5</p> <p>Z.534.706</p> <p>3/4"</p>

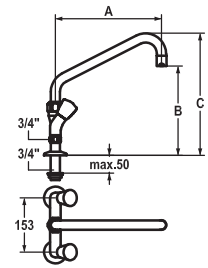


Art.-No.	KWC-No.	FUN
<b>118411</b>	<b>K.24.42.41.000C74</b>	115.0315.639
all chrome, AD 153, A 300, B 252, C 345		
<b>118412</b>	<b>K.24.42.42.000C74</b>	115.0315.640
all chrome, AD 153, A 300, B 356, C 449		

**Two-handle mixer • Commercial kitchen**

- Two-handle mixer
- KWC CORONA metal handles, removable
  - Swivel spout 360°
    - with adjustable gland
    - Jet regulator
  - OptimalSpace - ample space for washing or working
  - Flat valves M20 x 1.25
    - stainless steel valve seat
  - Pillar connections 3/4" x 3/4" L 45
  - Mounting hole size ø28 mm

Flow rate 120 l/min (3 bar)  
Acoustic group U

<p>A 300</p> <p>K.33.42.A1</p> <p>M38x1.5</p> <p>Z.200.177</p> <p>Z.534.706</p> <p>3/4"</p>	<p>A 300</p> <p>K.33.42.A2</p> <p>M38x1.5</p> <p>Z.534.706</p> <p>3/4"</p> <p>Z.200.177</p>
<p>Z.503.009</p> <p>K.32.40.01</p>	<p>Z.503.009</p> <p>K.32.40.01</p>
<p>Z.503.008</p> <p>K.32.40.01</p>	<p>K.30.99.35.000.46</p> <p>3/4" x 3/4" L=45 mm</p> <p>Z.600.276</p> <p>Z.606.622</p> <p>Z.532.590</p> <p>3/4"</p>

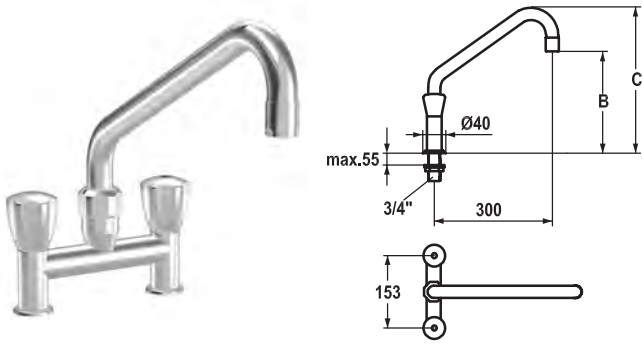

Art.-No.	KWC-No.	FUN
<b>105823</b>	<b>K.24.42.E1.000C35</b>	115.0315.628
all chrome, AD 153, A 300, B 210, C 305		
<b>105824</b>	<b>K.24.42.E2.000C35</b>	115.0315.629
all chrome, AD 153, A 300, B 315, C 410		


**Two-handle mixer • Commercial kitchen**

Two-handle mixer

- KWC CORONA metal handles, removable
- Swivel spout 360°
  - with adjustable gland
  - Jet regulator
- OptimalSpace - ample space for washing or working
- Flat valves M20 x 1.25
  - stainless steel valve seat
- Connecting thread 3/4"
- Mounting hole size ø28 mm

Flow rate 120 l/min (3 bar)  
Acoustic group U

<p>A 300 K.33.42.A1</p>	<p>A 300 K.33.42.A2</p>
<p>Z.503.009</p>	
<p>Z.503.008</p>	

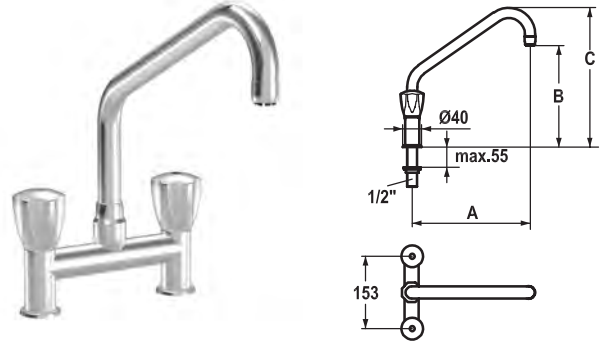

Art.-No.	KWC-No.	FUN
<b>105829</b>	<b>K.24.42.K1.000C34</b>	115.0315.632
all chrome, AD 153, A 250, B 215, C 297		
<b>105826</b>	<b>K.24.42.K3.000C34</b>	115.0315.630
all chrome, AD 153, A 250, B 310, C 392		
<b>105828</b>	<b>K.24.42.K5.000C34</b>	115.0315.631
all chrome, AD 153, A 350, B 215, C 297		


**Two-handle mixer • Commercial kitchen**

Two-handle mixer

- KWC CORONA metal handles, removable
- Swivel spout 180°
  - Jet regulator
- OptimalSpace - ample space for washing or working
- Flat valves M20 x 1.25
  - stainless steel valve seat
- Connecting thread 1/2"
- Mounting hole size ø22 mm

Flow rate 88 l/min (3 bar)  
Acoustic group U

<p>A 250 K.33.42.K1</p>	<p>A 350 K.33.42.K5</p>
<p>A 250 K.33.42.K3</p>	
<p>Z.503.009</p>	<p>Z.503.008</p>



Art.-No.	KWC-No.	FUN
100962	K.24.41.60.000C06	115.0315.663
all chrome		

**Two-handle mixer • Commercial kitchen**


Two-handle mixer

- Suspension spring
- KWC CORONA metal handles, removable
- TouchProtect - anti-scald protection thanks to the "double skin" principle
- Intrinsically safe against backflow
- Pre-rinse spray
  - with integrated delayed closing device to minimize water hammer
  - with valve maintenance unit for cleaning
  - SprayClean - easy to clean and actively prevents limescale buildup
  - SprayLock - lockable jet spray
  - PowerClean - needle spray mode

- OptimalSpace - ample space for washing or working
- Flat valves M20 x 1.25
  - stainless steel valve seat
- Copper tubes  $\varnothing$ 10 mm
- Fastening by means of threaded sleeve M33 x 1.5
- Mounting hole size  $\varnothing$ 35 mm

Spray: Flow rate 15 l/min (3 bar)  
Acoustic group I

<p>Z.503.009 K.32.40.01</p>	<p>Z.502.844.700 L 1075 mm Z.633.570 Z.534.714.700</p>	<p>Z.503.818 <math>\varnothing</math> 20.5 mm L= 731 mm Z.600.529</p>	<p>Z.634.116 - 10/2017 Z.638.391 11/2017 -</p>
<p>Z.503.008 K.32.40.01</p>	<p>Z.536.530.145 Z.601.434 Z.536.525 Z.536.526 Z.636.634 Z.636.518 Z.536.527</p>	<p>Z.600.515</p>	<p>Z.500.897 L = 60 mm, M12 Z.505.221 L = 90 mm, M12</p>
		<p>Z.532.179 <math>\varnothing</math> 10 mm Z.500.899 <math>\varnothing</math>10mm x 3/8"</p>	<p>Z.506.019 Z.538.106</p>

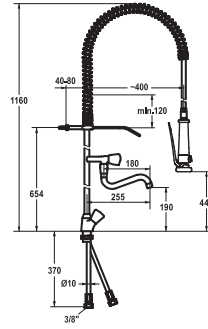

Art.-No.	KWC-No.	FUN
<b>105093</b>	<b>K.24.41.61.000C06</b>	115.0315.627
all chrome, A 180		

**Two-handle mixer • Commercial kitchen**

Two-handle mixer


- Suspension spring
- KWC CORONA metal handles, removable
- TouchProtect - anti-scald protection thanks to the "double skin" principle
- Inherently safe against backflow
- Swivel spout 180°
  - Jet regulator


- Pre-rinse spray
  - with integrated delayed closing device to minimize water hammer
  - with valve maintenance unit for cleaning
  - SprayClean - easy to clean and actively prevents limescale buildup
  - SprayLock - lockable jet spray
  - PowerClean - needle spray mode
- OptimalSpace - ample space for washing or working
- Flat valves M20 x 1.25
  - stainless steel valve seat
- Copper tubes ø10 mm
- Fastening by means of threaded sleeve M33 x 1.5
- Mounting hole size ø35 mm

Flow rate 41 l/min (3 bar)

Spray: Flow rate 18 l/min (3 bar)

Acoustic group II

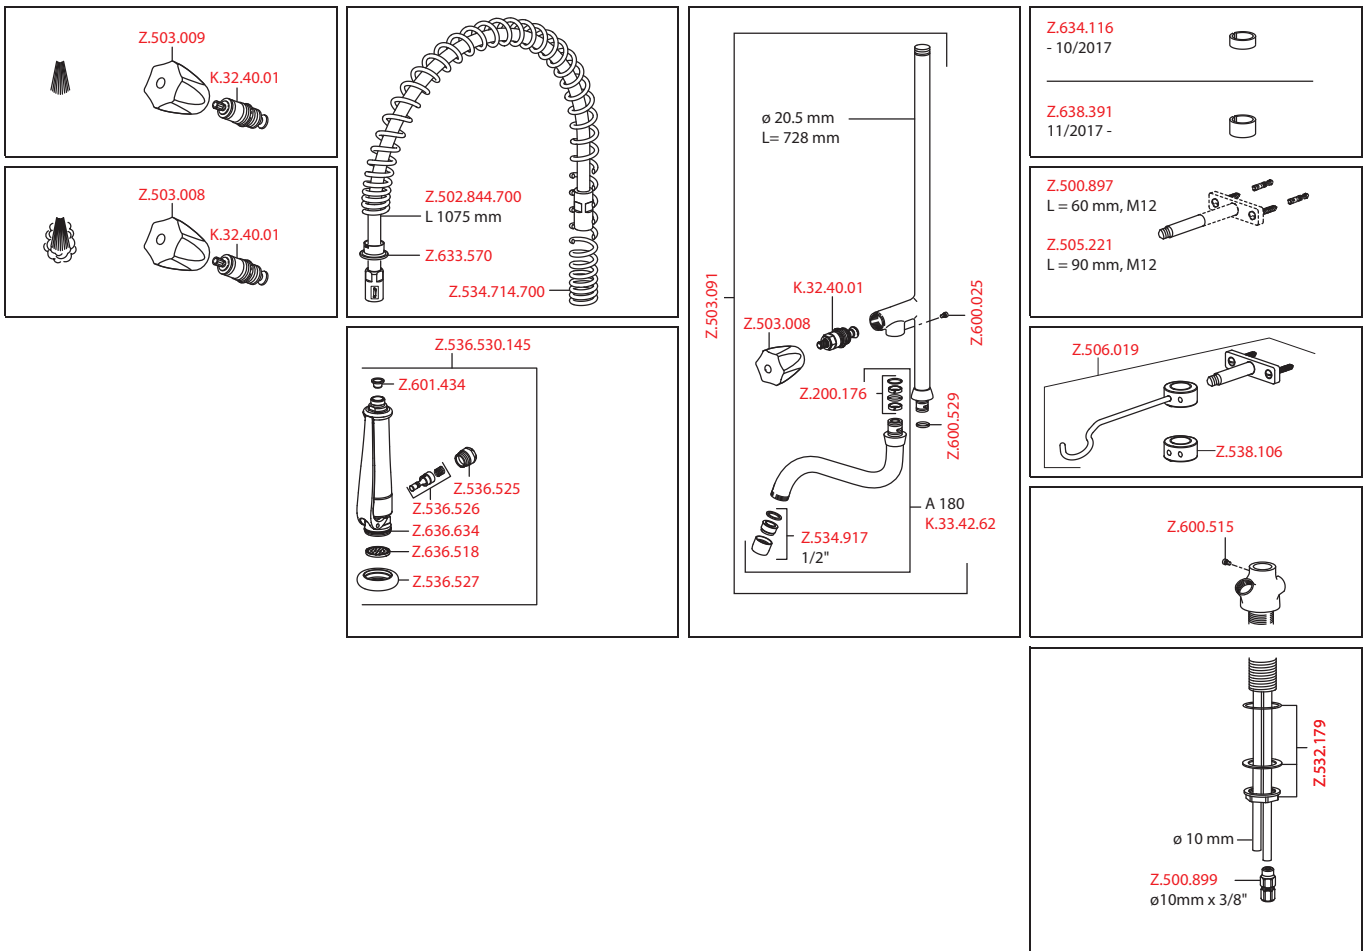



Art.-No.	KWC-No.	FUN
100960	K.24.40.60.000C34	115.0315.661
all chrome		

**Commercial kitchen • Vertical shut-off valve**


Vertical shut-off valve

- Suspension spring
- KWC CORONA metal handle, removable (cold water)
- TouchProtect - anti-scald protection thanks to the "double skin" principle
- Pre-rinse spray
  - with integrated delayed closing device to minimize water hammer
  - with valve maintenance unit for cleaning
  - SprayClean - easy to clean and actively prevents limescale buildup
  - SprayLock - lockable jet spray
  - PowerClean - needle spray mode

- OptimalSpace - ample space for washing or working
- Flat valves M20 x 1.25
  - stainless steel valve seat
- Connecting thread 1/2"
- Mounting hole size ø22 mm

Spray: Flow rate 15 l/min (3 bar)  
Acoustic group I

<p>Z.503.009 K.32.40.01</p>	<p>Z.502.844.700 L 1075 mm Z.633.570 Z.534.714.700</p>	<p>Z.501.836 ø20,5 mm L = 475 mm 3/4" Z.600.276</p>	<p>Z.634.116 - 10/2017 Z.638.391 11/2017 -</p>
<p>Z.536.530.145 Z.601.434 Z.536.525 Z.536.526 Z.636.634 Z.636.518 Z.536.527</p>	<p>Z.503.840 3/4" 1/2" Z.600.274 Z.600.323 Z.532.649</p>	<p>Z.500.897 L = 60 mm, M12 Z.505.221 L = 90 mm, M12</p>	<p>Z.506.019 Z.538.106</p>

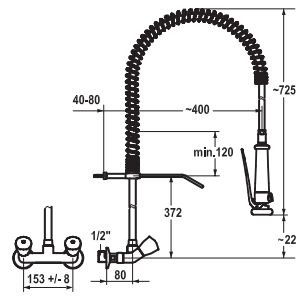

Art.-No.	KWC-No.	FUN
<b>100456</b>	<b>K.24.42.70.000C78</b>	115.0315.621
all chrome, AD 153 +/- 8 mm		


### Two-handle mixer • Commercial kitchen

Two-handle mixer


- Suspension spring
- KWC CORONA metal handles, removable
- TouchProtect - anti-scald protection thanks to the "double skin" principle
- Inherently safe against backflow
- Pre-rinse spray
  - with integrated delayed closing device to minimize water hammer
  - with valve maintenance unit for cleaning
  - SprayClean - easy to clean and actively prevents limescale buildup
  - SprayLock - lockable jet spray
  - PowerClean - needle spray mode

- OptimalSpace - ample space for washing or working
- Flat valves M20 x 1.25
  - stainless steel valve seat
- Wall connections 1/2" x 3/4", with shut-off valve L 40 eccentric 4 mm

Spray: Flow rate 15 l/min (3 bar)  
Acoustic group I

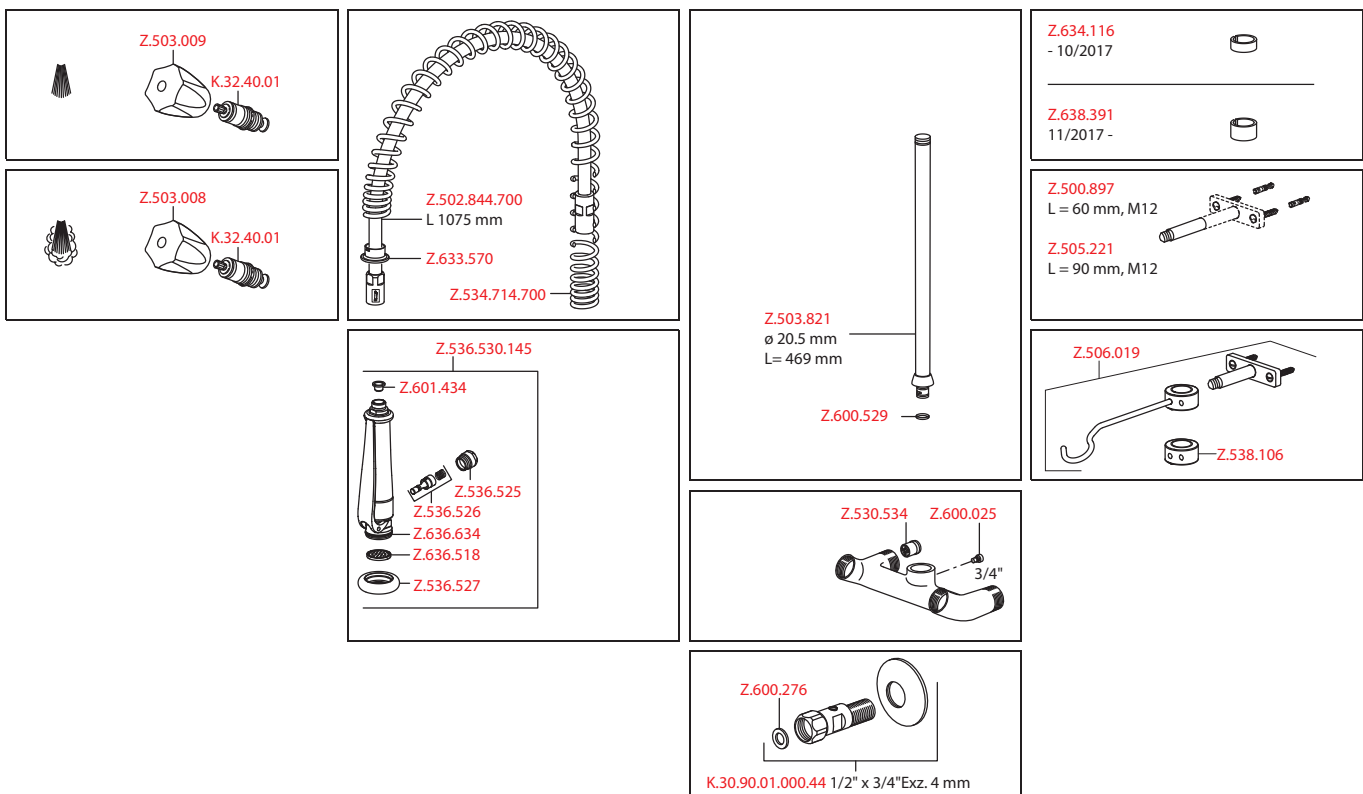





Art.-No.	KWC-No.	FUN
100448	K.24.42.74.000C78	115.0315.620
all chrome, AD 153 +/- 8 mm, A 300		

**Two-handle mixer • Commercial kitchen**


Two-handle mixer

- Suspension spring
- KWC CORONA metal handles, removable
- TouchProtect - anti-scald protection thanks to the "double skin" principle
- Intrinsically safe against backflow
- Swivel spout 180°
  - Jet regulator

- Pre-rinse spray
  - with integrated delayed closing device to minimize water hammer
  - with valve maintenance unit for cleaning
  - SprayClean - easy to clean and actively prevents limescale buildup
  - SprayLock - lockable jet spray
  - PowerClean - needle spray mode
- OptimalSpace - ample space for washing or working
- Flat valves M20 x 1.25
  - stainless steel valve seat
- Wall connections 1/2" x 3/4", with shut-off valve L 40 eccentric 4 mm

Flow rate 33 l/min (3 bar)  
 Spray: Flow rate 15 l/min (3 bar)  
 Acoustic group U

<p>Z.503.009 K.32.40.01</p>	<p>Z.502.844.700 L 1075 mm Z.633.570 Z.534.714.700</p>	<p>Z.503.836 ø 20.5 mm L= 500 mm Z.601.205</p>	<p>Z.634.116 - 10/2017 Z.638.391 11/2017 -</p>
<p>Z.503.008 K.32.40.01</p>	<p>Z.536.530.145 Z.601.434 Z.536.525 Z.536.526 Z.636.634 Z.636.518 Z.536.527</p>	<p>Z.530.534 Z.600.025</p>	<p>Z.500.897 L = 60 mm, M12 Z.505.221 L = 90 mm, M12</p>
<p>A 300 Z.535.424 Z.200.176 K.31.99.00.000.30 M22x1</p>		<p>Z.634.783 Z.501.297 Z.631.222</p>	<p>Z.506.019 Z.538.106</p>



Art.-No.	KWC-No.	FUN
<b>100961</b>	<b>K.24.40.70.000C34</b>	115.0315.662
all chrome		


**Commercial kitchen • Wall mounted valve**

Wall mounted valve

- Suspension spring
- KWC CORONA metal handle, removable (cold water)
- TouchProtect - anti-scald protection thanks to the "double skin" principle
- Pre-rinse spray
  - with integrated delayed closing device to minimize water hammer
  - with valve maintenance unit for cleaning
  - SprayClean - easy to clean and actively prevents limescale buildup
  - SprayLock - lockable jet spray
  - PowerClean - needle spray mode
- OptimalSpace - ample space for washing or working
- Flat valves M20 x 1.25
  - stainless steel valve seat
- Connecting thread 1/2"

Spray: Flow rate 15 l/min (3 bar)  
Acoustic group I

<p>Z.503.009 K.32.40.01</p>	<p>Z.502.844.700 L 1075 mm Z.633.570 Z.534.714.700</p>	<p>Z.501.836 ø20.5 mm L = 475 mm 3/4" Z.600.276</p>	<p>Z.634.116 - 10/2017 Z.638.391 11/2017 -</p>
<p>Z.536.530.145 Z.601.434 Z.536.525 Z.536.526 Z.636.634 Z.636.518 Z.536.527</p>	<p>Z.503.839 (inkl. K.32.40.01+ Z.503.009) 1/2" 3/4" Z.606.868</p>	<p>Z.500.897 L = 60 mm, M12 Z.505.221 L = 90 mm, M12</p>	<p>Z.506.019 Z.538.106</p>



Art.-No.	KWC-No.	FUN
100964	K.24.42.62.000C71	115.0315.664
all chrome, AD 153		

**Two-handle mixer • Commercial kitchen**


Two-handle mixer

- KWC CORONA metal handles, removable
- TouchProtect - anti-scald protection thanks to the "double skin" principle
- Intrinsically safe against backflow
- Pre-rinse spray
  - with integrated delayed closing device to minimize water hammer
  - with valve maintenance unit for cleaning
  - SprayClean - easy to clean and actively prevents limescale buildup
  - SprayLock - lockable jet spray
  - PowerClean - needle spray mode

- OptimalSpace - ample space for washing or working
- Flat valves M20 x 1.25
  - stainless steel valve seat
- Pillar connections 1/2" x 3/4" L 130
- Mounting hole size ø22 mm

Spray: Flow rate 15 l/min (3 bar)  
Acoustic group I

<p>Z.503.009 K.32.40.01</p>	<p>Z.502.844.700 L 1075 mm Z.633.570 Z.534.714.700</p>	<p>Z.503.822 ø20.5 mm L = 578 mm Z.600.529</p>	<p>Z.634.116 - 10/2017 Z.638.391 11/2017 -</p>
<p>Z.503.008 K.32.40.01</p>	<p>Z.536.530.145 Z.601.434 Z.536.525 Z.536.526 Z.636.634 Z.636.518 Z.536.527</p>	<p>Z.600.025 Z.530.534 3/4"</p>	<p>Z.500.897 L = 60 mm, M12 Z.505.221 L = 90 mm, M12</p>
<p>Z.506.019 Z.538.106</p>			
<p>Z.600.276 Z.606.622 Z.532.649 1/2"</p> <p>K.30.99.34.000.44 1/2" x 3/4" L = 130 mm</p>			



Art.-No.	KWC-No.	FUN
<b>100966</b>	<b>K.24.42.64.000C71</b>	115.0315.626
all chrome, AD 153, A 300		

**Two-handle mixer • Commercial kitchen**


Two-handle mixer

- Suspension spring
- KWC CORONA metal handles, removable
- TouchProtect - anti-scald protection thanks to the "double skin" principle
- Intrinsically safe against backflow
- Swivel spout 180°
  - Jet regulator

- Pre-rinse spray
  - with integrated delayed closing device to minimize water hammer
  - with valve maintenance unit for cleaning
  - SprayClean - easy to clean and actively prevents limescale buildup
  - SprayLock - lockable jet spray
  - PowerClean - needle spray mode
- OptimalSpace - ample space for washing or working
- Flat valves M20 x 1.25
  - stainless steel valve seat
- Pillar connections 1/2" x 3/4" L 130
- Mounting hole size ø22 mm

Flow rate 33 l/min (3 bar)  
 Spray: Flow rate 15 l/min (3 bar)  
 Acoustic group U

<p>Z.503.009 K.32.40.01</p>	<p>Z.502.844.700 L 1075 mm Z.633.570 Z.534.714.700</p>	<p>Z.503.836 ø 20.5 mm L= 500 mm Z.601.205</p>	<p>Z.634.116 - 10/2017 Z.638.391 11/2017 -</p>
<p>Z.503.008 K.32.40.01</p>	<p>Z.536.530.145 Z.601.434 Z.536.525 Z.536.526 Z.636.634 Z.636.518 Z.536.527</p>	<p>Z.600.025 Z.530.534 3/4"</p>	<p>Z.500.897 L = 60 mm, M12 Z.505.221 L = 90 mm, M12</p>
	<p>A 300 Z.535.424 Z.200.176 K.31.99.00.000.30 M22x1</p>	<p>Z.634.783 Z.501.297 Z.631.222</p>	<p>Z.506.019 Z.538.106 Z.600.276 Z.606.622 Z.532.649 1/2"</p>

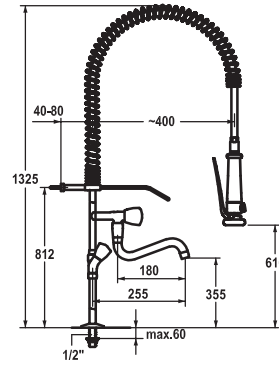

Art.-No.	KWC-No.	FUN
<b>112788</b>	<b>K.24.42.61.000C71</b>	115.0315.670
all chrome, AD 153, A 180		


**Two-handle mixer • Commercial kitchen**


Two-handle mixer

- Suspension spring
- KWC CORONA metal handles, removable
- TouchProtect - anti-scald protection thanks to the "double skin" principle
- Inherently safe against backflow
- Swivel spout 180°

- Pre-rinse spray
  - with integrated delayed closing device to minimize water hammer
  - with valve maintenance unit for cleaning
  - SprayClean - easy to clean and actively prevents limescale buildup
  - SprayLock - lockable jet spray
  - PowerClean - needle spray mode
- OptimalSpace - ample space for washing or working
- Flat valves M20 x 1.25
  - stainless steel valve seat
- Pillar connections 1/2" x 3/4" L 130
- Mounting hole size ø22 mm

Flow rate 33 l/min (3 bar)  
 Spray: Flow rate 15 l/min (3 bar)  
 Acoustic group U

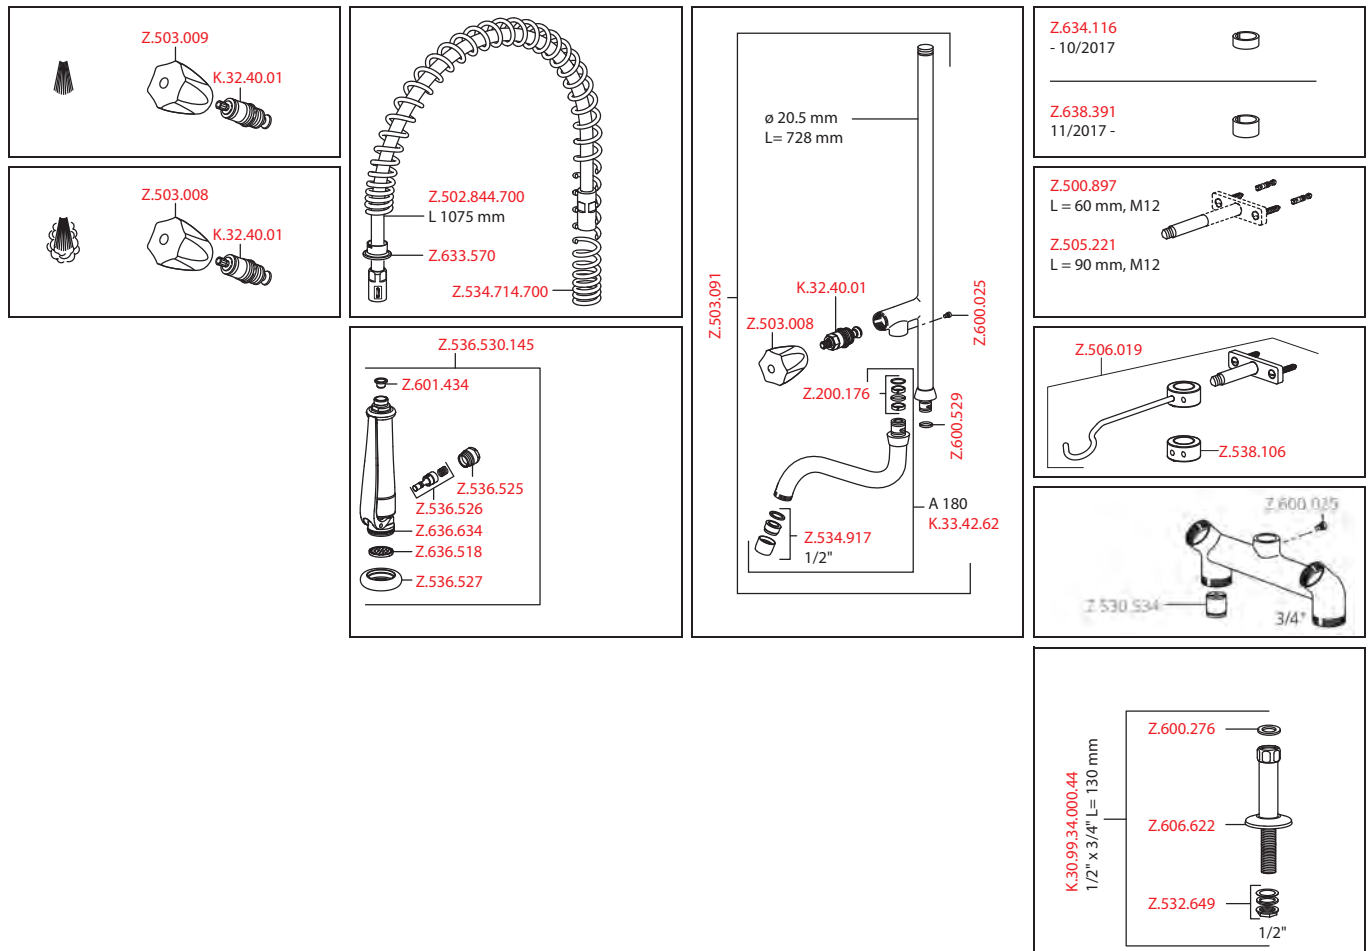






Art.-No.	KWC-No.	FUN
<b>121271</b>	<b>24.501.064.000</b>	115.0315.692
all chrome, A 300		
<b>121272</b>	<b>24.501.066.000</b>	115.0315.693
all chrome, A 450		

**Lever mixer • Commercial kitchen**

Lever mixer

- Pillar 300 mm
- Swivel spout 360°
  - with adjustable gland
  - Jet regulator
- OptimalSpace - ample space for washing or working
- KWC cartridge XL 46 - high capacity
  - with ceramic discs
  - flow rate and temperature continuously variable
  - temperature limitation
- Copper tubes  $\varnothing 15$  mm
- Fastening by means of threaded sleeve 1 1/4"
- Mounting hole size  $\varnothing 42$  mm

Flow rate 40 l/min (3 bar)  
Acoustic group U

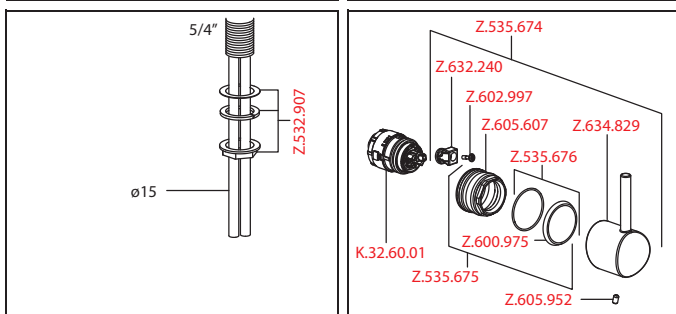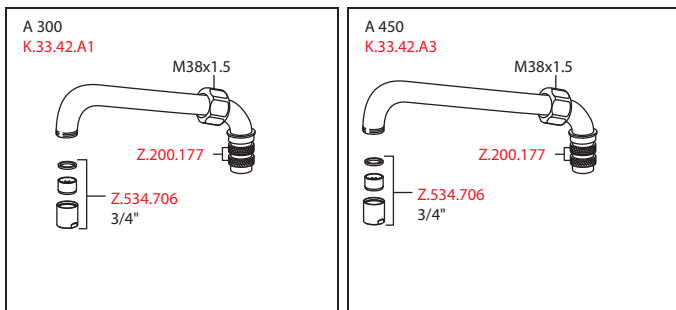



Art.-No.	KWC-No.	FUN
<b>121267</b>	<b>24.501.044.000</b>	115.0315.688
all chrome, A 300		
<b>121268</b>	<b>24.501.046.000</b>	115.0315.689
all chrome, A 450		


**Lever mixer • Commercial kitchen**

Lever mixer

- Swivel spout 360°
  - with adjustable gland
  - Jet regulator
- OptimalSpace - ample space for washing or working
- KWC cartridge XL 46 - high capacity
  - with ceramic discs
  - flow rate and temperature continuously variable
  - temperature limitation
- Copper tubes  $\varnothing 15$  mm
- Fastening by means of threaded sleeve 1 1/4"
- Mounting hole size  $\varnothing 42$  mm

Flow rate 40 l/min (3 bar)  
Acoustic group U

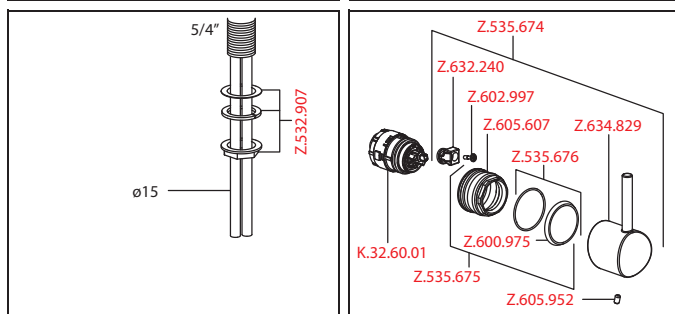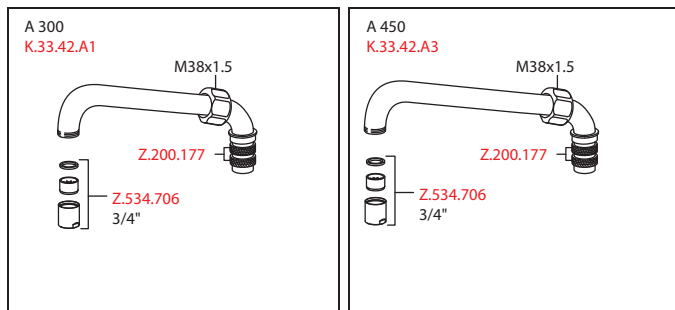








Art.-No.	KWC-No.	FUN
<b>121269</b>	<b>24.501.054.000</b>	115.0315.690
all chrome, A 300		
<b>121270</b>	<b>24.501.056.000</b>	115.0315.691
all chrome, A 450		

**Lever mixer • Commercial kitchen**

Lever mixer

- Pillar 100 mm
- Swivel spout 360°
  - with adjustable gland
  - Jet regulator
- OptimalSpace - ample space for washing or working
- KWC cartridge XL 46 - high capacity
  - with ceramic discs
  - flow rate and temperature continuously variable
  - temperature limitation
- Copper tubes  $\varnothing 15$  mm
- Fastening by means of threaded sleeve 1 1/4"
- Mounting hole size  $\varnothing 42$  mm

Flow rate 40 l/min (3 bar)  
Acoustic group U







Art.-No.	KWC-No.	FUN
<b>121299</b>	<b>24.503.174.000</b>	115.0315.695
all chrome, AD 153, A 300		


**Lever mixer • Commercial kitchen**

Lever mixer

- Swivel spout 360°
  - with adjustable gland
  - Jet regulator
- OptimalSpace - ample space for washing or working
- KWC cartridge XL 46 - high capacity
  - with ceramic discs
  - flow rate and temperature continuously variable
  - temperature limitation
- Pillar connections 3/4" x 3/4" L 45
- Mounting hole size  $\varnothing 30$  mm

Flow rate 50 l/min (3 bar)  
Acoustic group U

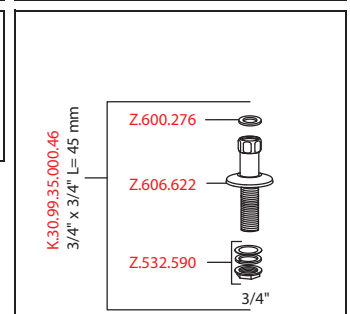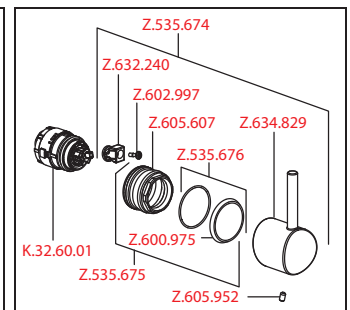








Art.-No.	KWC-No.	FUN
<b>121301</b>	<b>24.503.184.000</b>	115.0315.696
all chrome, AD 153, A 300		

**Lever mixer • Commercial kitchen**

Lever mixer

- Swivel spout 360°
  - with adjustable gland
  - Jet regulator
- OptimalSpace - ample space for washing or working
- KWC cartridge XL 46 - high capacity
  - with ceramic discs
  - flow rate and temperature continuously variable
  - temperature limitation
- Pillar connections 3/4" x 3/4" L 195
- Mounting hole size ø30 mm

Flow rate 50 l/min (3 bar)  
Acoustic group U








Art.-No.	KWC-No.	FUN
<b>121287</b>	<b>24.502.194.000</b>	115.0315.651
all chrome, AD 153 +/- 15 mm, A 300		
<b>121290</b>	<b>24.502.196.000</b>	115.0315.652
all chrome, AD 153 +/- 15 mm, A 450		

**Lever mixer • Commercial kitchen**


Lever mixer

- Swivel spout
  - with adjustable gland
  - Jet regulator
- OptimalSpace - ample space for washing or working
- KWC cartridge XL 46 - high capacity
  - with ceramic discs
  - flow rate and temperature continuously variable
  - temperature limitation
- Wall connections 3/4" x 3/4", with shut-off valve L 40 eccentric 7.5 mm

Flow rate 50 l/min (3 bar)  
Acoustic group U

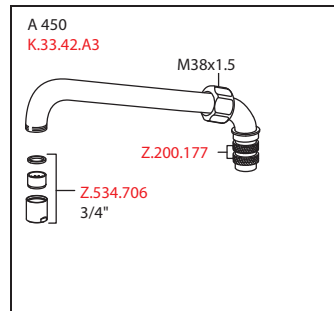





Art.-No.	KWC-No.	FUN
<b>121273</b>	<b>24.501.130.000</b>	115.0315.694
all chrome		









**Lever mixer • Commercial kitchen**


Lever mixer

- Suspension spring
- TouchProtect - anti-scald protection thanks to the "double skin" principle
- Intrinsically safe against backflow
- Pre-rinse spray
  - with integrated delayed closing device to minimize water hammer
  - with valve maintenance unit for cleaning
  - SprayClean - easy to clean and actively prevents limescale buildup
  - SprayLock - lockable jet spray
  - PowerClean - needle spray mode
- OptimalSpace - ample space for washing or working

- KWC cartridge XL 46 - high capacity
  - with ceramic discs
  - flow rate and temperature continuously variable
  - temperature limitation
- Copper tubes ø15 mm
- Fastening by means of threaded sleeve 1 1/4"
- Mounting hole size ø42 mm

Spray: Flow rate 15 l/min (3 bar)  
Acoustic group II

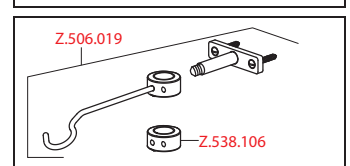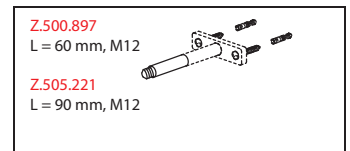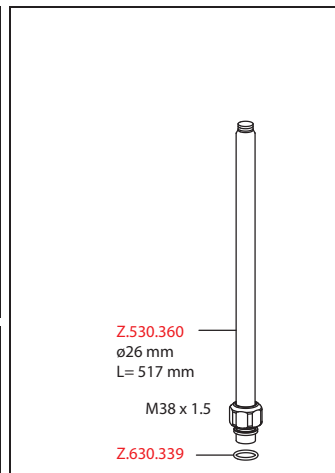



Art.-No.	KWC-No.	FUN
<b>121275</b>	<b>24.501.144.000</b>	115.0315.647
all chrome, A 200, B 270		
<b>121276</b>	<b>24.501.146.000</b>	115.0315.648
all chrome, A 300, B 370		

**Lever mixer • Commercial kitchen**

Lever mixer


- Suspension spring
- TouchProtect - anti-scald protection thanks to the "double skin" principle
- Intrinsically safe against backflow
- Swivel spout
  - with adjustable gland
  - Jet regulator

- Pre-rinse spray
  - with integrated delayed closing device to minimize water hammer
  - with valve maintenance unit for cleaning
  - SprayClean - easy to clean and actively prevents limescale buildup
  - SprayLock - lockable jet spray
  - PowerClean - needle spray mode
- OptimalSpace - ample space for washing or working
- KWC cartridge XL 46 - high capacity
  - with ceramic discs
  - flow rate and temperature continuously variable
  - temperature limitation
- Copper tubes  $\varnothing 15$  mm
- Fastening by means of threaded sleeve 1 1/4"
- Mounting hole size  $\varnothing 42$  mm

Flow rate 24 l/min (3 bar)

Spray: Flow rate 15 l/min (3 bar)

Acoustic group II



Art.-No.	KWC-No.	FUN
<b>121294</b>	<b>24.503.114.000</b>	115.0315.653
all chrome, AD 153, A 200, B 270		


**Lever mixer • Commercial kitchen**

Lever mixer

- Suspension spring
- TouchProtect - anti-scald protection thanks to the "double skin" principle
- Intrinsically safe against backflow
- Swivel spout
  - with adjustable gland
  - Jet regulator

- Pre-rinse spray
  - with integrated delayed closing device to minimize water hammer
  - with valve maintenance unit for cleaning
  - SprayClean - easy to clean and actively prevents limescale buildup
  - SprayLock - lockable jet spray
  - PowerClean - needle spray mode
- OptimalSpace - ample space for washing or working
- KWC cartridge XL 46 - high capacity
  - with ceramic discs
  - flow rate and temperature continuously variable
  - temperature limitation
- Pillar connections 1/2" x 3/4" L 130
- Mounting hole size ø22 mm

Flow rate 34 l/min (3 bar)  
 Spray: Flow rate 15 l/min (3 bar)  
 Acoustic group II



Art.-No.	KWC-No.	FUN
<b>121296</b>	<b>24.503.124.000</b>	115.0315.654
all chrome, AD 153, A 200, B 270		
<b>121297</b>	<b>24.503.126.000</b>	115.0315.655
all chrome, AD 153, A 300, B 370		

**Lever mixer • Commercial kitchen**

Lever mixer

- Suspension spring
- TouchProtect - anti-scald protection thanks to the "double skin" principle
- Intrinsically safe against backflow
- Swivel spout
  - with adjustable gland
  - Jet regulator


- Pre-rinse spray
  - with integrated delayed closing device to minimize water hammer
  - with valve maintenance unit for cleaning
  - SprayClean - easy to clean and actively prevents limescale buildup
  - SprayLock - lockable jet spray
  - PowerClean - needle spray mode
- OptimalSpace - ample space for washing or working
- KWC cartridge XL 46 - high capacity
  - with ceramic discs
  - flow rate and temperature continuously variable
  - temperature limitation
- Pillar connections 1/2" x 3/4" L 340
- Mounting hole size ø22 mm

Flow rate 34 l/min (3 bar)

Spray: Flow rate 15 l/min (3 bar)

Acoustic group II

	<p>A 200 Z.530.366</p> <p>Z.534.706 3/4"</p>	<p>Z.535.403 ø26 mm L= 460 mm</p>	<p>Z.500.897 L = 60 mm, M12</p> <p>Z.505.221 L = 90 mm, M12</p>
<p>Z.536.530.145</p>	<p>A 300 K.33.42.54</p> <p>Z.534.706 3/4"</p>		<p>Z.506.019</p>
<p>Z.600.276</p> <p>Z.606.622</p> <p>Z.532.649 1/2"</p>			<p>Z.535.674</p> <p>Z.632.240</p> <p>Z.602.997</p> <p>Z.605.607</p> <p>Z.634.829</p> <p>Z.535.676</p> <p>Z.600.975</p> <p>Z.605.952</p>



Art.-No.	KWC-No.	FUN
<b>121281</b>	<b>24.502.164.000</b>	115.0315.649
all chrome, AD 153 +/- 8 mm, A 200, B 270		
<b>121284</b>	<b>24.502.166.000</b>	115.0315.650
all chrome, AD 153 +/- 8 mm, A 300, B 370		

**Lever mixer • Commercial kitchen**

Lever mixer

- Suspension spring
- TouchProtect - anti-scald protection thanks to the "double skin" principle
- Intrinsically safe against backflow
- Swivel spout 160°
  - with adjustable gland
  - Jet regulator
- Pre-rinse spray
  - with integrated delayed closing device to minimize water hammer
  - with valve maintenance unit for cleaning
  - SprayClean - easy to clean and actively prevents limescale buildup
  - SprayLock - lockable jet spray
  - PowerClean - needle spray mode
- OptimalSpace - ample space for washing or working
- KWC cartridge XL 46 - high capacity
  - with ceramic discs
  - flow rate and temperature continuously variable


- Wall connections 1/2" x 3/4", with shut-off valve L 40 eccentric 4 mm

Flow rate 34 l/min (3 bar)

Spray: Flow rate 15 l/min (3 bar)

Acoustic group II

	<p>A 200 Z.530.366</p>	<p>Z.535.403 ø26 mm L= 460 mm</p>	<p>Z.500.897 L = 60 mm, M12</p> <p>Z.505.221 L = 90 mm, M12</p>
<p>Z.536.530.145</p>	<p>A 300 K.33.42.54</p>		<p>Z.506.019</p>
		<p>Z.600.276</p>	

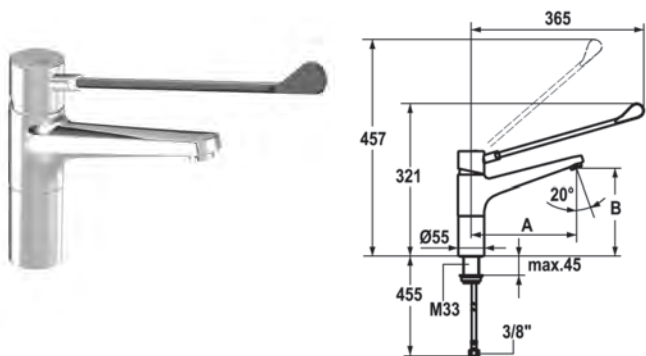



Art.-No.	KWC-No.	FUN
<b>121746</b>	<b>24.501.103.000LLFL</b>	115.0315.700
all chrome, A 225, B 184, flexible connection hoses		
<b>121744</b>	<b>24.501.104.000LLFL</b>	115.0315.699
all chrome, A 300, B 207, flexible connection hoses		

**Lever mixer • Commercial kitchen**

Lever mixer

- Socket 85 mm
- Swivel spout 160°
  - Neoperl® Cascade®
- OptimalSpace - ample space for washing or working
- KWC cartridge L 39 - universal
  - with ceramic discs
  - flow rate and temperature continuously variable
  - temperature and flow rate limitation
- Flexible connection hoses 3/8"
- Fastening by means of threaded sleeve M33 x 1.5
- Mounting hole size ø35 mm

Flow rate 12 l/min (3 bar)  
Acoustic group I

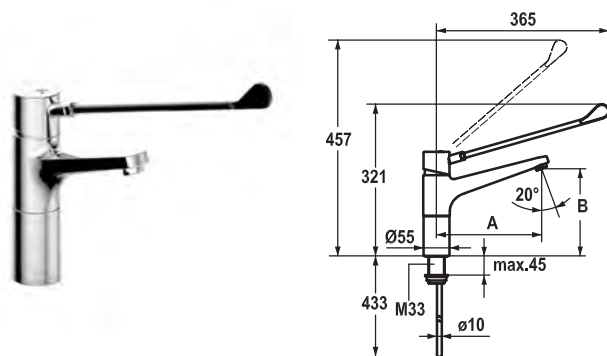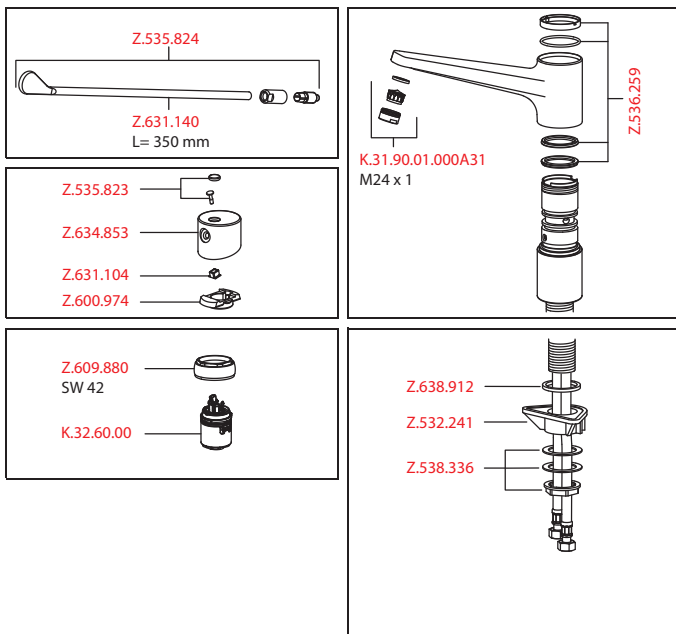


Art.-No.	KWC-No.	FUN
<b>123980</b>	<b>24.501.102.000LL</b>	115.0493.132
all chrome, A 150, B 162, copper tubes		


**Lever mixer • Commercial kitchen**

Lever mixer

- Swivel spout 160°
  - Neoperl® Cascade®
- OptimalSpace - ample space for washing or working
- KWC cartridge L 39 - universal
  - with ceramic discs
  - flow rate and temperature continuously variable
  - temperature and flow rate limitation
- Copper tubes ø10 mm
- Fastening by means of threaded sleeve M33 x 1.5
- Mounting hole size ø35 mm

Flow rate 12 l/min (3 bar)  
Acoustic group I

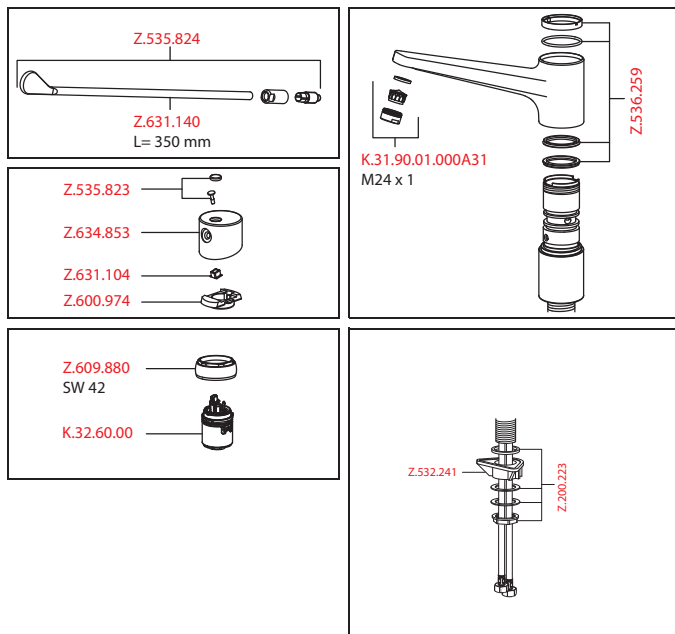

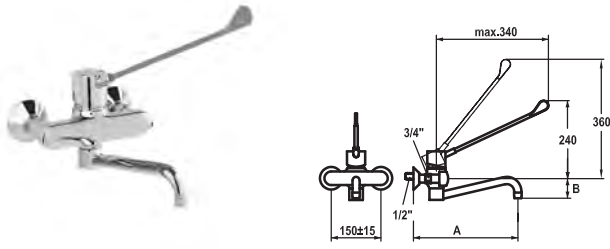



Art.-No.	KWC-No.	FUN
<b>115401</b>	<b>K.24.62.14.000B91</b>	115.0315.672
all chrome, AD 150 +/- 15 mm, A 300, B 60		
<b>115402</b>	<b>K.24.62.16.000B91</b>	115.0315.673
all chrome, AD 150 +/- 15 mm, A 400, B 35		

**Lever mixer • Commercial kitchen**

Lever mixer

- Swivel spout 120°
  - Neoperl® Cascade®
- OptimalSpace - ample space for washing or working
- KWC cartridge L 39 - universal
  - with ceramic discs
  - flow rate and temperature continuously variable
  - temperature and flow rate limitation
- Wall connections 1/2" x 3/4", with shut-off valve L 40 eccentric 7.5 mm

Flow rate 12 l/min (3 bar)  
Acoustic group I

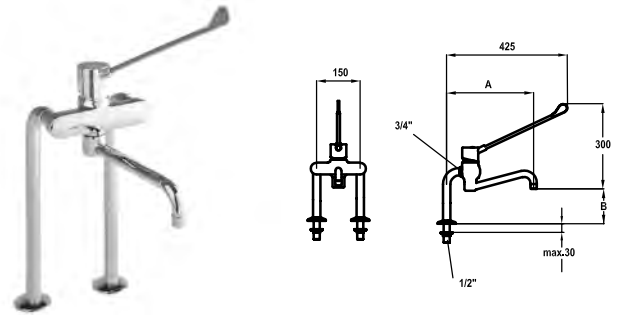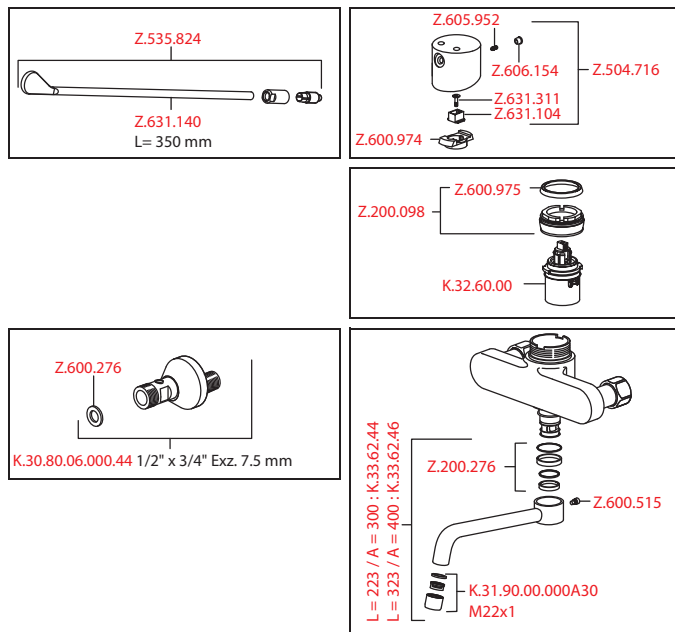


Art.-No.	KWC-No.	FUN
<b>117408</b>	<b>K.24.62.44.000B87</b>	115.0315.674
all chrome, AD 150, A 300, B 200		
<b>117409</b>	<b>K.24.62.46.000B87</b>	115.0315.675
all chrome, AD 150, A 400, B 227		


**Lever mixer • Commercial kitchen**

Lever mixer

- Swivel spout 120°
  - Neoperl® Cascade®
- OptimalSpace - ample space for washing or working
- KWC cartridge L 39 - universal
  - with ceramic discs
  - flow rate and temperature continuously variable
  - temperature and flow rate limitation
- Pillar connections 1/2" x 3/4" L 55
- Mounting hole size ø22 mm

Flow rate 12 l/min (3 bar)  
Acoustic group I

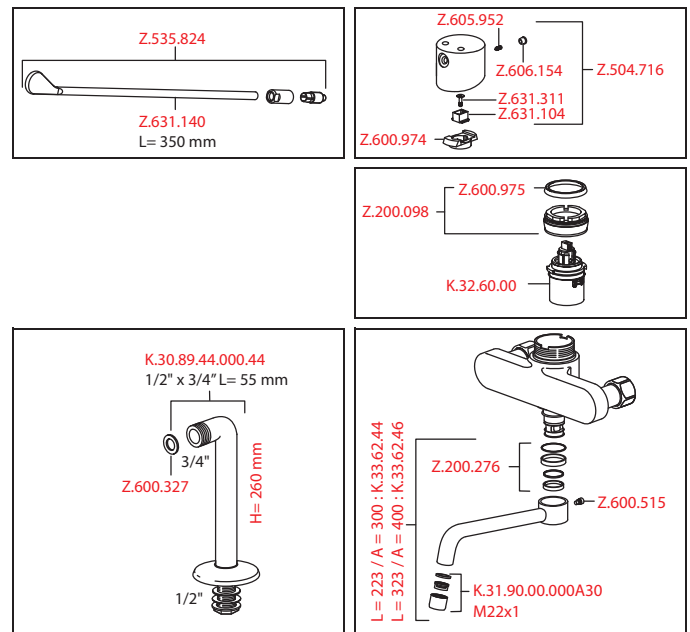




Art.-No.	KWC-No.	FUN
<b>115086</b>	<b>K.24.40.00.000C35</b>	115.0315.671
all chrome, G 3/4"		

### Lever mixer • Commercial kitchen

Shut-off valve

- KWC CORONA metal handle, removable (hot water to be requested when ordering)
- Flat valves M25 x 1.25
  - stainless steel valve seat
- Connecting thread 3/4"
- Fastening by means of threaded sleeve M33 x 1.5
- Mounting hole size ø35 mm

Flow rate 110 l/min (3 bar)  
Acoustic group U




Art.-No.	KWC-No.	FUN
<b>536530</b>	<b>Z.536.530.145</b>	133.0324.479
graphite gray		


Pre-rinse spray

- with integrated delayed closing device to minimize water hammer
- with valve maintenance unit for cleaning
- Connecting thread 1/2"

Spray: Flow rate 15 l/min (3 bar)

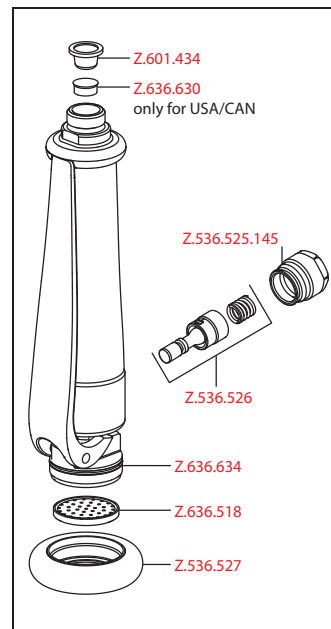




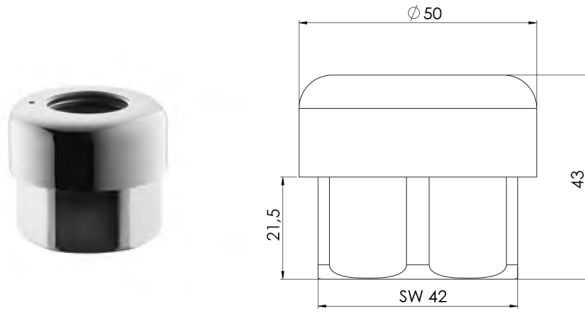

Art.-No.	KWC-No.	FUN
<b>537565</b>	<b>Z.537.565.000</b>	133.0493.135
all chrome		

**Outlet swivel limiter M 38 x 15**

- Suitable for:
  - KWC GASTRO
  - 2-handle and lever mixer
  - one hole / 2-hole + wall mixer 3/4"
  - limitation individually adjustable

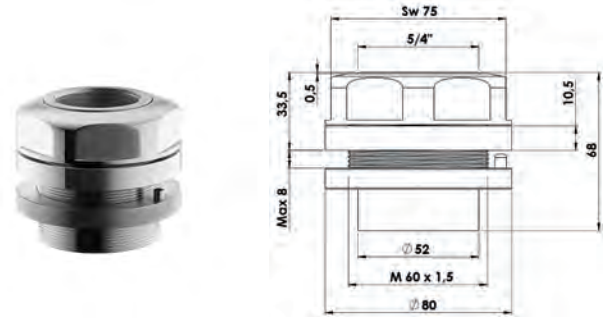

Art.-No.	KWC-No.	FUN
<b>538008</b>	<b>Z.538.008.000</b>	133.0521.972
all chrome		

**Preassembled socket 5/4"**

- Mounting hole size  $\varnothing 60.5$  mm
- Suitable for:
  - KWC GASTRO
  - 2-handle and lever mixer
  - one hole mixer



Art.-No.	KWC-No.	FUN
<b>534746</b>	<b>Z.502.868.700</b>	133.0325.630
stainless steel, L 1275		
<b>534747</b>	<b>Z.502.869.700</b>	133.0325.631
stainless steel, L 1500		
<b>535469</b>	<b>Z.502.844.700</b>	133.0324.455
stainless steel, L 1075		
<b>534778</b>	<b>Z.502.845.700</b>	133.0325.632
stainless steel, L 2045		

**Shower hose for pre-rinse spray**

- Made of stainless steel
- Connecting thread 1/2"